


DEGSON is a global manufacturer of industrial and new energy connectors, providing customized solutions for customers.



Circular Connectors

**DEGSON**


Device Connection Technology

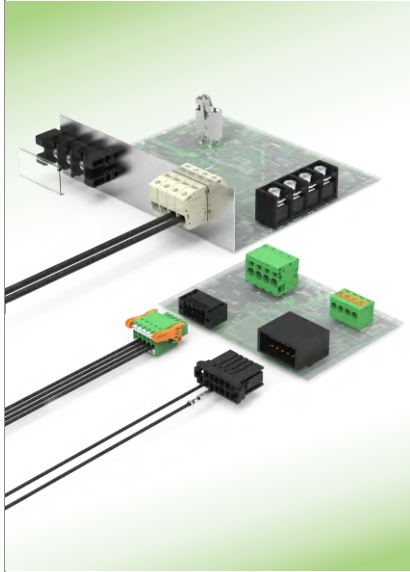

DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

**DEGSON**

DIN Rail Terminal Blocks

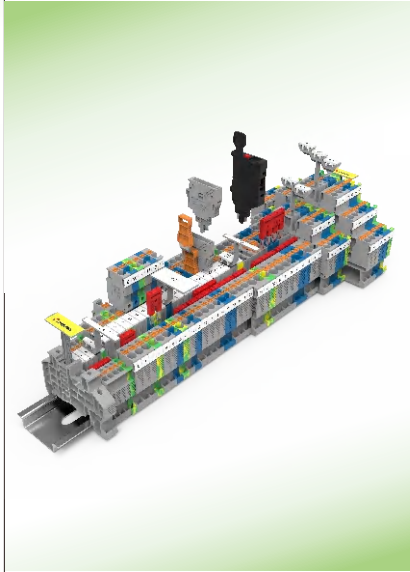

DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

**DEGSON**

Heavy Duty Connector



DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

**DEGSON**

High Voltage & EV Charging System



DEGSON PTE. LTD.
ISO9001 ISO14001 IATF16949

**DEGSON**

Interface Electronics



DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

**DEGSON**

Automation



DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

 **DEGSON**
DEGSON PTE. LTD.

Add: 2 Venture Drive #08-07 Vision
Exchange Singapore 608526
www.degson.com

The catalog is for reference purpose only and details are
base on company's specifications

Tel: +65-60190748
E-mail: sale@degson.com



CC 25-E01

DEGSON Circular Connectors



ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949       

Brief Introduction

Founded in 1990,DEGSON is well known as a comprehensive industrial solution provider,with UL-CTDP, VDE-TDAP and CNAS approved laboratory.DEGSON has passed ISO9001、ISO14001、ISO45001、ISO80079-34,ISO/TS22163 and IATF16949 Management System,and is a national high-tech enterprise.

DEGSON is engaged in supplying highly reliable and durable products to serve global customers. The company has a market-leading capability of mould processing, automatic manufacturing and advanced testing. DEGSON has the complete engineering ability to support global customers with the professional customization solution and value-added service.

DEGSON products are widely recognized in China, the USA, Germany, the UK, Italy, Spain, Turkey, Japan, South Korea, Singapore, etc. totally hundred countries and regions. DEGSON supply high quality products and provide professional services globally in the industry sectors likely industrial automation, instrument, electric power, railway, marine and offshore, new energy, elevator, lighting, security, machinery,E-bike industry, etc. The company won the recognition from partners among Fortune 500 and industry leading enterprises.

Based on the business philosophy of “Clients First,Win-win Strategy,Responsibility Integrity,Excellence Pursuit. ”, DEGSON continuously integrates professional technical resources, R&D innovation, product manufacturing and technology application capabilities. Relying on global sales network, DEGSON aims to supply series of multiple varieties of high-quality products and services. We provide global customers with professional and quick connected application solutions, help customers continue to create value. DEGSON is making contributions to creating a smart and interconnected world.

UL-CTDP (USA), VDE-TDAP (Germany) and CNAS laboratories

Strategic cooperation with UL and VDE



① The general manager of UL global energy & technology division visit our company



② Sven Ohrke, President of VDE global services, comes to DEGSON to discuss strategic cooperation



③ VDE Laboratory Accreditation: In July 2010, VDE Issued the "VDE Authorized Laboratory" Certificate to DEGSON' s laboratory.
UL laboratory accreditation: UL formally issued "UL WTDP" certification to DEGSON in March 2013.
On April, 2016, UL-CTDP.
On December, 2016, VDE-TDAP.
On January, 2017, Pass IRIS system audit.



ISO9001


ISO14001

IATF16949

ISO/TS 22163

UL - CTDP

VDE - TDAP

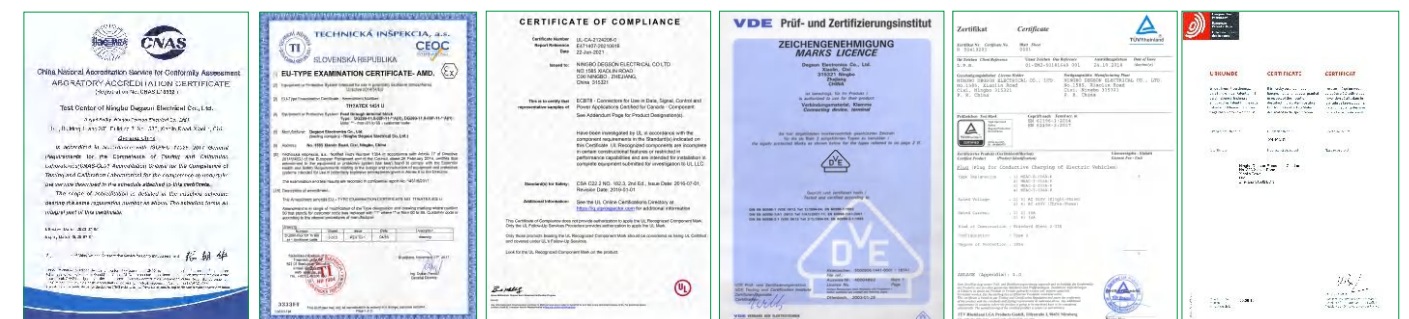

CNAS certificate

EX certificate

UL Certificates:10,Covering 4000+Products VDE Certificates:178,Covering 3000+Products

TUV certificate

European invention patent



CONTENTS

Circular connector series which functions as signal and power transfer are applied to device connection in industrial environment. While shielded type and unshielded type of circular connector are used in field assembly. What’s more, customized circular connectors can be designed according to customer’s need.



M5 overmolded with cable plug	03-06
M5 Panel mounting	07-16



M8 overmolded with cable plug	19-28
M8 Panel mounting	29-46
M8 Field assembly	47-54



M12 overmolded with cable plug	57-84
M12 Panel mounting	85-116
M12 Field assembly	117-142

CONTENTS



M23 Field assembly	145-149
M23 Panel mounting	150-154




7/8"-16UN overmolded with cable plug	157-164
7/8"-16UN Panel mounting	165-174



Servo connector	175-178
-----------------------	---------



M8, M12 Distributor	179-184
---------------------------	---------

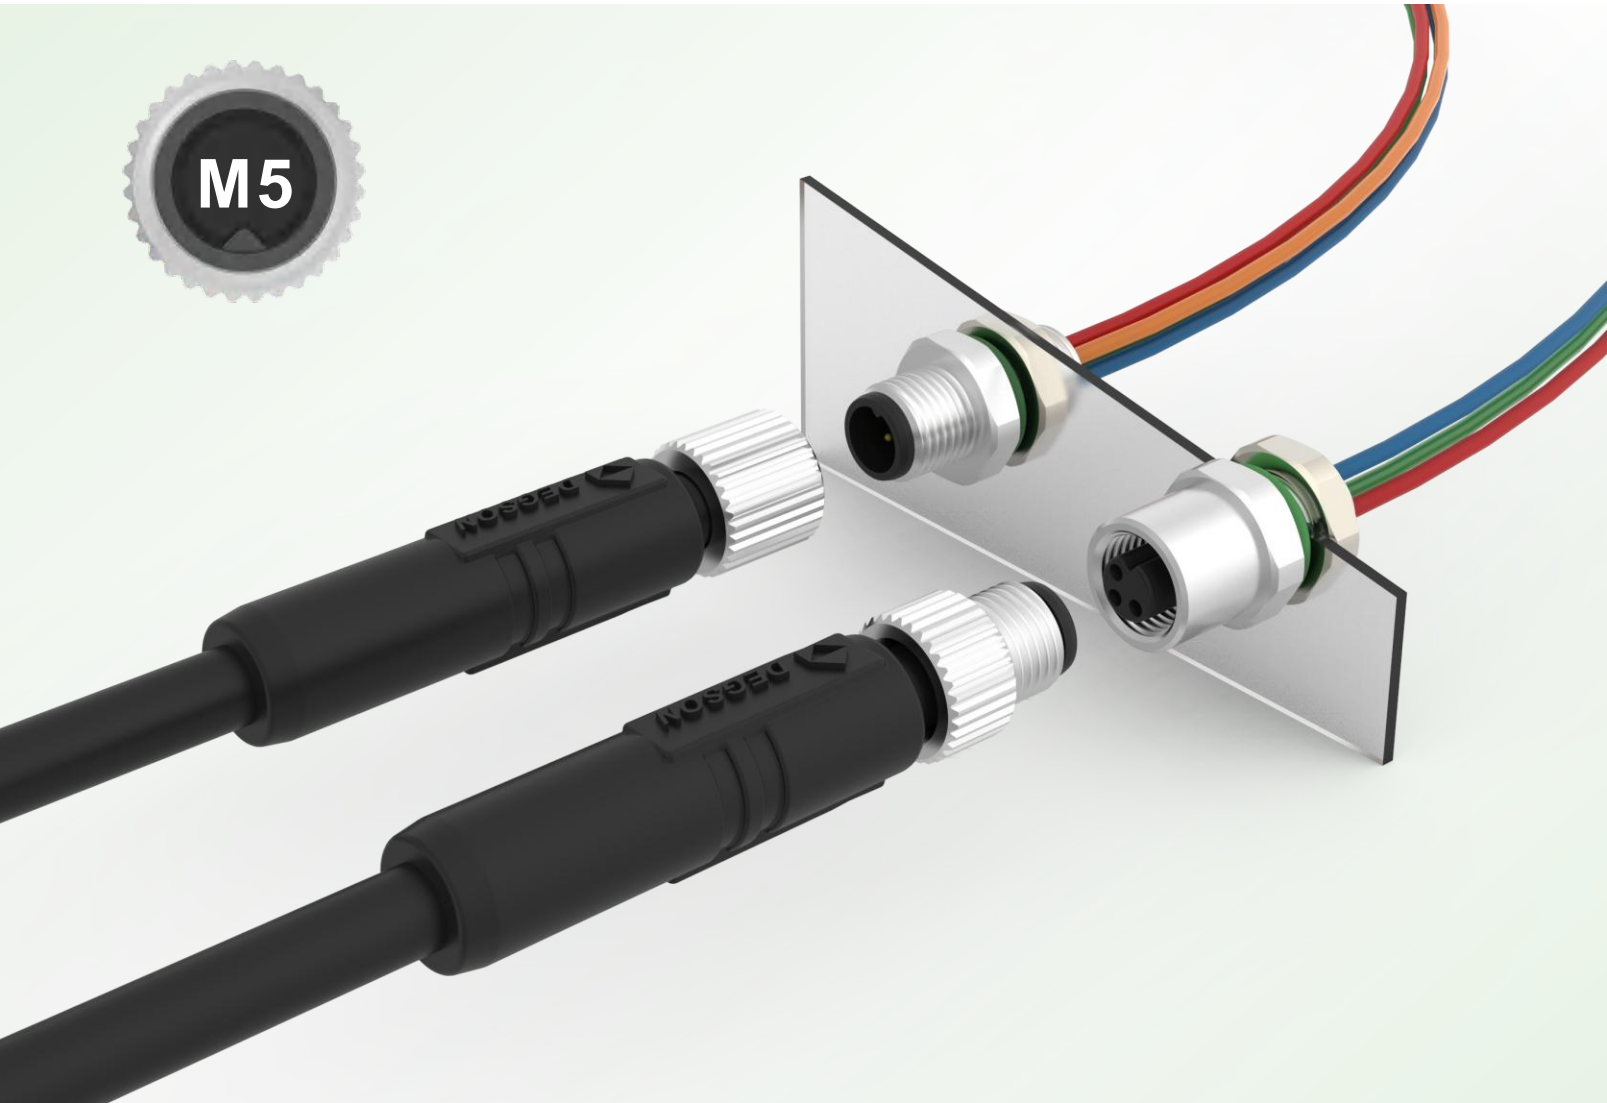


Advantages

- Good sealing performance, with IP class up to IP 67.
- Micro connectors, save space.
- Suitable for continuous shock and vibration environment.
- compatible with same series connectors on the market.


Features

- Cable material: PUR, PVC.
- IP-class: IP67.
- Wire connection method is optional.
- Compliance with IEC 61076 standard.

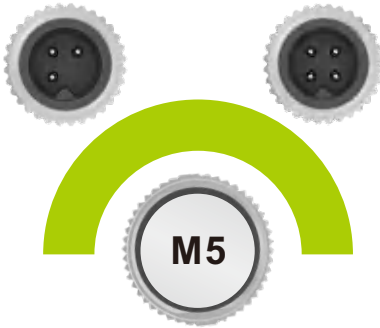

Circular Connectors Part Number

Circular Connectors Part Number Reference

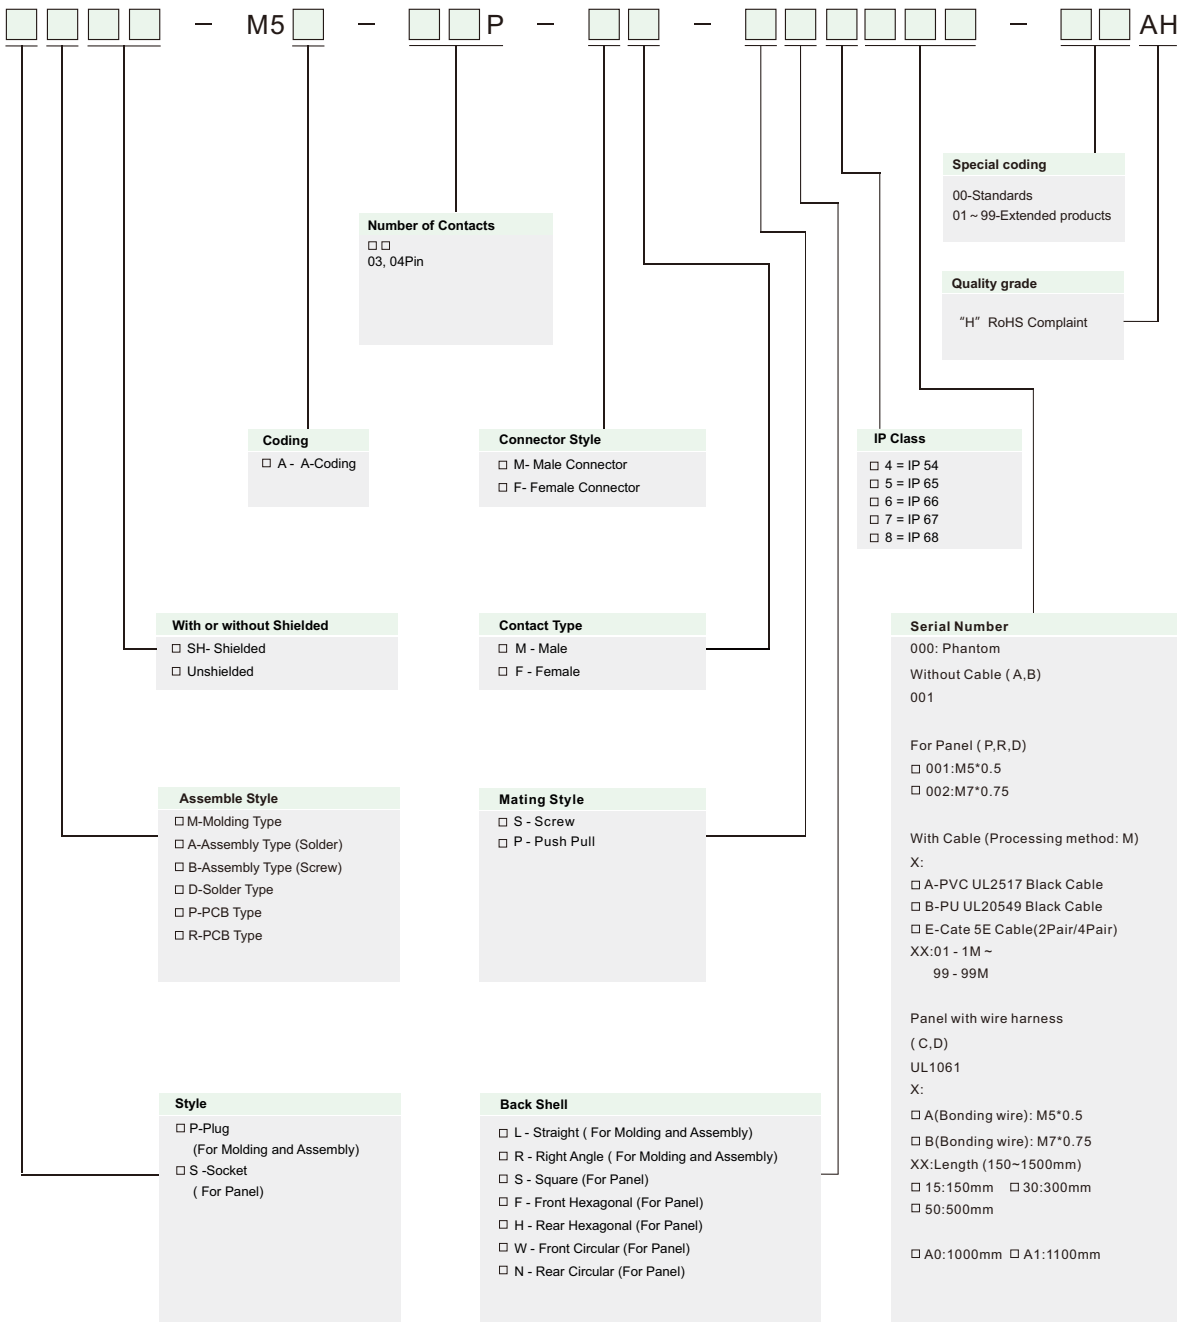


For example:

1. M5 female plug 4Pin: PM-M5A-04P-FF-SL7A01-00A(H)

Details: Plastic covered at the end of wire, M5 A-Coding, 4Pin, female socket female Pin, thread locked, straight head, IP67, PVC black kacket. Covered by UL2517 wire, the length by 1.0M,standard products.

M5 x 0.5 Male Overmolded with Cable plug,Single end,Unshielded,Straight.

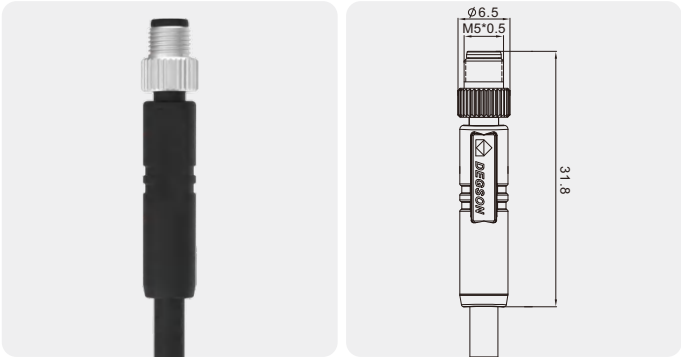


Technical Data

Standard	IEC 61076	Contact carriers material	PU
Series	M5, Male, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	1A max.	Seal	Silicone
Rated voltage	60V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	1A	1A
Rated voltage	V.	60V	60V
Wire/Cable	Wire gauge	26AWG	26AWG
	Cross section	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .
PVC	1m	PM-M5A-03P-MM-SL7A01-00AH	PM-M5A-04P-MM-SL7A01-00AH
	3m	PM-M5A-03P-MM-SL7A03-00AH	PM-M5A-04P-MM-SL7A03-00AH
	5m	PM-M5A-03P-MM-SL7A05-00AH	PM-M5A-04P-MM-SL7A05-00AH
	Customized		
PUR	1m	PM-M5A-03P-MM-SL7B01-00AH	PM-M5A-04P-MM-SL7B01-00AH
	3m	PM-M5A-03P-MM-SL7B03-00AH	PM-M5A-04P-MM-SL7B03-00AH
	5m	PM-M5A-03P-MM-SL7B05-00AH	PM-M5A-04P-MM-SL7B05-00AH
	Customized		

M5 x 0.5 Male Overmolded with Cable plug,Single end,Unshiedled,Angled.

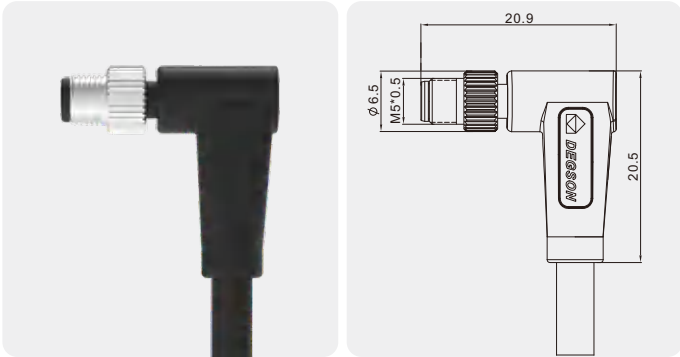


Technical Data

Standard	IEC 61076	Contact carriers material	PU
Series	M5, Male, Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	1A max.	Seal	Silicone
Rated voltage	60V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	1A	1A
Rated voltage	V.	60V	60V
Wire/Cable	Wire gauge	26AWG	26AWG
	Cross section	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .
PVC	1m	PM-M5A-03P-MM-SR7A01-00AH	PM-M5A-04P-MM-SR7A01-00AH
	3m	PM-M5A-03P-MM-SR7A03-00AH	PM-M5A-04P-MM-SR7A03-00AH
	5m	PM-M5A-03P-MM-SR7A05-00AH	PM-M5A-04P-MM-SR7A05-00AH
	Customized		
PUR	1m	PM-M5A-03P-MM-SR7B01-00AH	PM-M5A-04P-MM-SR7B01-00AH
	3m	PM-M5A-03P-MM-SR7B03-00AH	PM-M5A-04P-MM-SR7B03-00AH
	5m	PM-M5A-03P-MM-SR7B05-00AH	PM-M5A-04P-MM-SR7B05-00AH
	Customized		

M5 x 0.5 Female Overmolded with Cable plug,Single end,Unshielded,Straight.

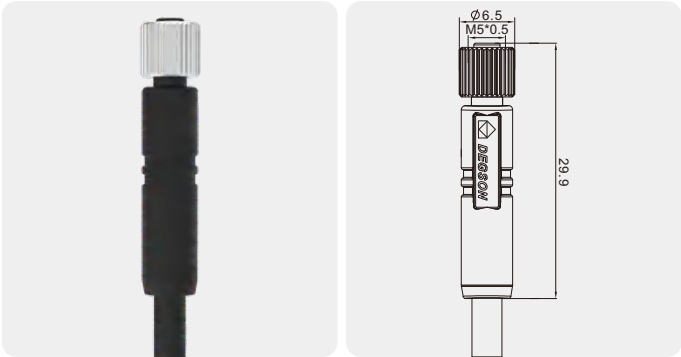


Technical Data

Standard	IEC 61076	Contact carriers material	PU
Series	M5, Female,Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	1A max.	Seal	Silicone
Rated voltage	60V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	1A	1A
Rated voltage	V.	60V	60V
Wire/Cable	Wire gauge	26AWG	26AWG
	Cross section	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .
PVC	1m	PM-M5A-03P-FF-SL7A01-00AH	PM-M5A-04P-FF-SL7A01-00AH
	3m	PM-M5A-03P-FF-SL7A03-00AH	PM-M5A-04P-FF-SL7A03-00AH
	5m	PM-M5A-03P-FF-SL7A05-00AH	PM-M5A-04P-FF-SL7A05-00AH
	Customized		
PUR	1m	PM-M5A-03P-FF-SL7B01-00AH	PM-M5A-04P-FF-SL7B01-00AH
	3m	PM-M5A-03P-FF-SL7B03-00AH	PM-M5A-04P-FF-SL7B03-00AH
	5m	PM-M5A-03P-FF-SL7B05-00AH	PM-M5A-04P-FF-SL7B05-00AH
	Customized		

M5 x 0.5 Female Overmolded with Cable plug,Single end,Unshielded,Angled.

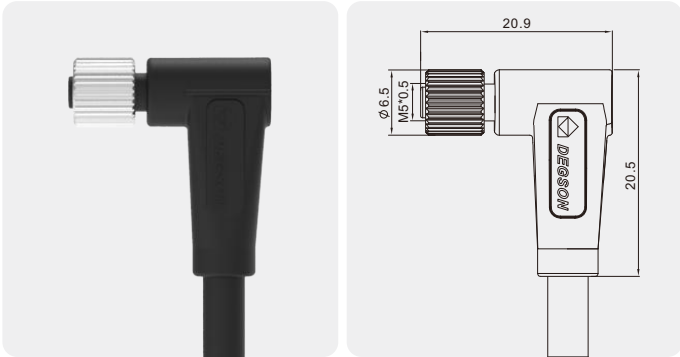


Technical Data

Standard	IEC 61076	Contact carriers material	PU
Series	M5, Female,Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	1A max.	Seal	Silicone
Rated voltage	60V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	1A	1A
Rated voltage	V.	60V	60V
Wire/Cable	Wire gauge	26AWG	26AWG
	Cross section	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .
PVC	1m	PM-M5A-03P-FF-SR7A01-00AH	PM-M5A-04P-FF-SR7A01-00AH
	3m	PM-M5A-03P-FF-SR7A03-00AH	PM-M5A-04P-FF-SR7A03-00AH
	5m	PM-M5A-03P-FF-SR7A05-00AH	PM-M5A-04P-FF-SR7A05-00AH
	Customized		
PUR	1m	PM-M5A-03P-FF-SR7B01-00AH	PM-M5A-04P-FF-SR7B01-00AH
	3m	PM-M5A-03P-FF-SR7B03-00AH	PM-M5A-04P-FF-SR7B03-00AH
	5m	PM-M5A-03P-FF-SR7B05-00AH	PM-M5A-04P-FF-SR7B05-00AH
	Customized		

M5 x 0.5 Male Panel Mount Receptacle,
Rear Mounting,with 0.5m wires.

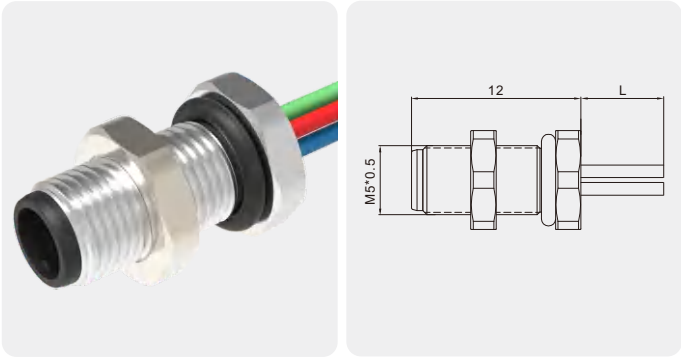


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M5, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	1A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	1A	1A
Rated voltage	V.	60V	60V
Wire/Cable	Wire gauge	26AWG	26AWG
	Cross section	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .
0.5m		SD-M5A-03P-MM-SF7A50-00AH	SD-M5A-04P-MM-SF7A50-00AH
Customized			

M5 x 0.5 Male Panel Mount Receptacle,
Front Mounting,with 0.5m wires.

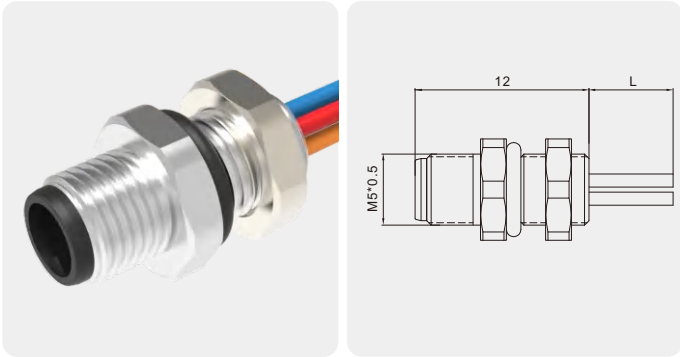


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M5, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	1A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	1A	1A
Rated voltage	V.	60V	60V
Wire/Cable	Wire gauge	26AWG	26AWG
	Cross section	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .
0.5m		SD-M5A-03P-MM-SH7A50-00AH	SD-M5A-04P-MM-SH7A50-00AH
Customized			

M5 x 0.5 Female Panel Mount Receptacle,
Rear Mounting,with 0.5m wires.

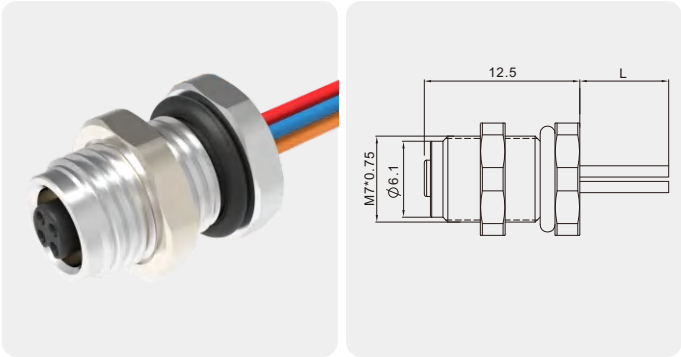


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M5, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	1A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MQ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	1A	1A
Rated voltage	V.	60V	60V
Wire/Cable	Wire gauge	26AWG	26AWG
	Cross section	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .
0.5m		SD-M5A-03P-FF-SF7B50-00AH	SD-M5A-04P-FF-SF7B50-00AH
Customized			

M5 x 0.5 Female Panel Mount Receptacle,
Front Mounting,with 0.5m wires.

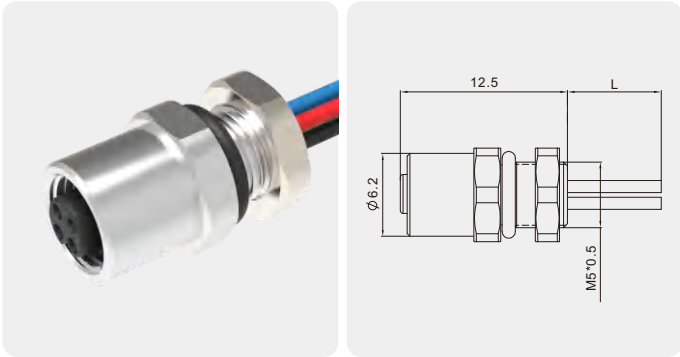


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M5, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	1A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MQ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	1A	1A
Rated voltage	V.	60V	60V
Wire/Cable	Wire gauge	26AWG	26AWG
	Cross section	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .
0.5m		SD-M5A-03P-FF-SH7A50-00AH	SD-M5A-04P-FF-SH7A50-00AH
Customized			

M5 x 0.5 Male Panel Mount Receptacle,
Rear Mounting, Unshielded, PCB Soldering.

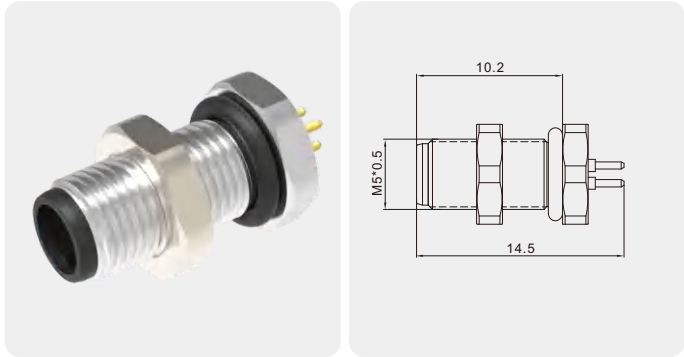


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M5, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	1A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	1A	1A
Rated voltage	V.	60V	60V
Description		Order NO .	Order NO .
—		SP-M5A-03P-MM-SF7001-00AH	SP-M5A-04P-MM-SF7001-00AH


Dimension Figure



PCB Layout




PCB Layout



Panel Cut-Out

M5 x 0.5 Female Panel Mount Receptacle,
Rear Mounting, Unshielded, PCB Soldering.

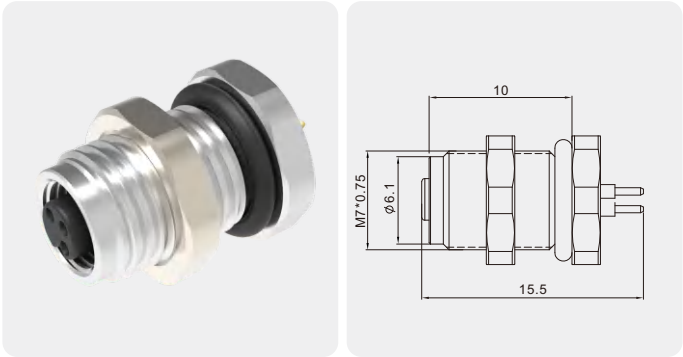


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M5, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	1A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	1A	1A
Rated voltage	V.	60V	60V
Description		Order NO .	Order NO .
—		SP-M5A-03P-FF-SF7002-00AH	SP-M5A-04P-FF-SF7002-00AH


Dimension Figure



PCB Layout




PCB Layout



Panel Cut-Out

M5 x 0.5 Male Panel Mount Receptacle, Rear Mounting, Unshielded, Soldering without wire.

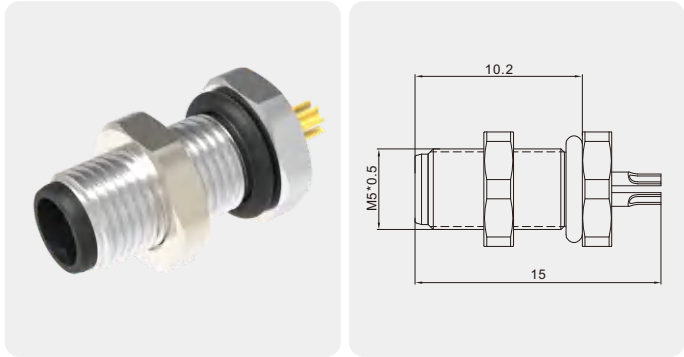


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M5, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	1A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—


Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	1A	1A
Rated voltage	V.	60V	60V
Description		Order NO .	Order NO .
—		SD-M5A-03P-MM-SF7001-00AH	SD-M5A-04P-MM-SF7001-00AH

Dimension Figure



Panel Cut-Out

M5 x 0.5 Male Panel Mount Receptacle, Front Mounting, Unshielded, Soldering without wire.

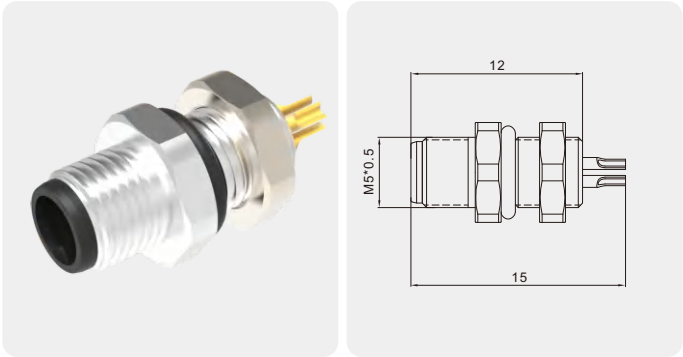


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M5, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	1A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—


Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	1A	1A
Rated voltage	V.	60V	60V
Description		Order NO .	Order NO .
—		SD-M5A-03P-MM-SH7001-00AH	SD-M5A-04P-MM-SH7001-00AH

Dimension Figure



Panel Cut-Out

M5x0.5 Female Panel Mount Receptacle,
Rear Mounting,Unshielded,Soldering
without wire.

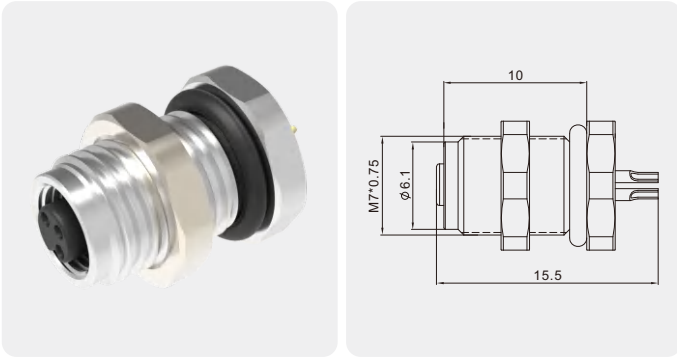


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M5, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	1A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—


Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	1A	1A
Rated voltage	V.	60V	60V
Description		Order NO .	Order NO .
—		SD-M5A-03P-FF-SF7002-00AH	SD-M5A-04P-FF-SF7002-00AH

Dimension Figure



Panel Cut-Out

M5x0.5 Female Panel Mount Receptacle,
Front Mounting,Unshielded,Soldering
without wire.

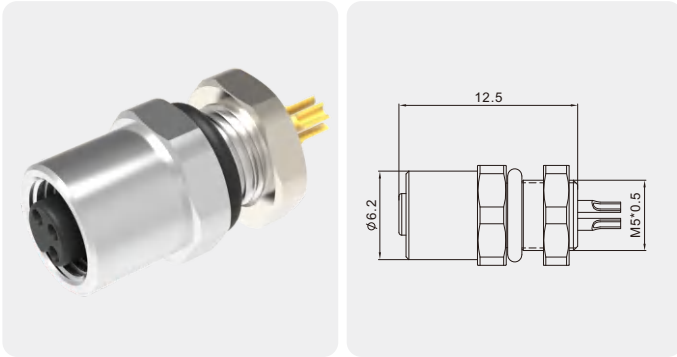


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M5, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	1A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	1A	1A
Rated voltage	V.	60V	60V
Description		Order NO .	Order NO .
—		SD-M5A-03P-FF-SH7001-00AH	SD-M5A-04P-FF-SH7001-00AH

Dimension Figure



Panel Cut-Out

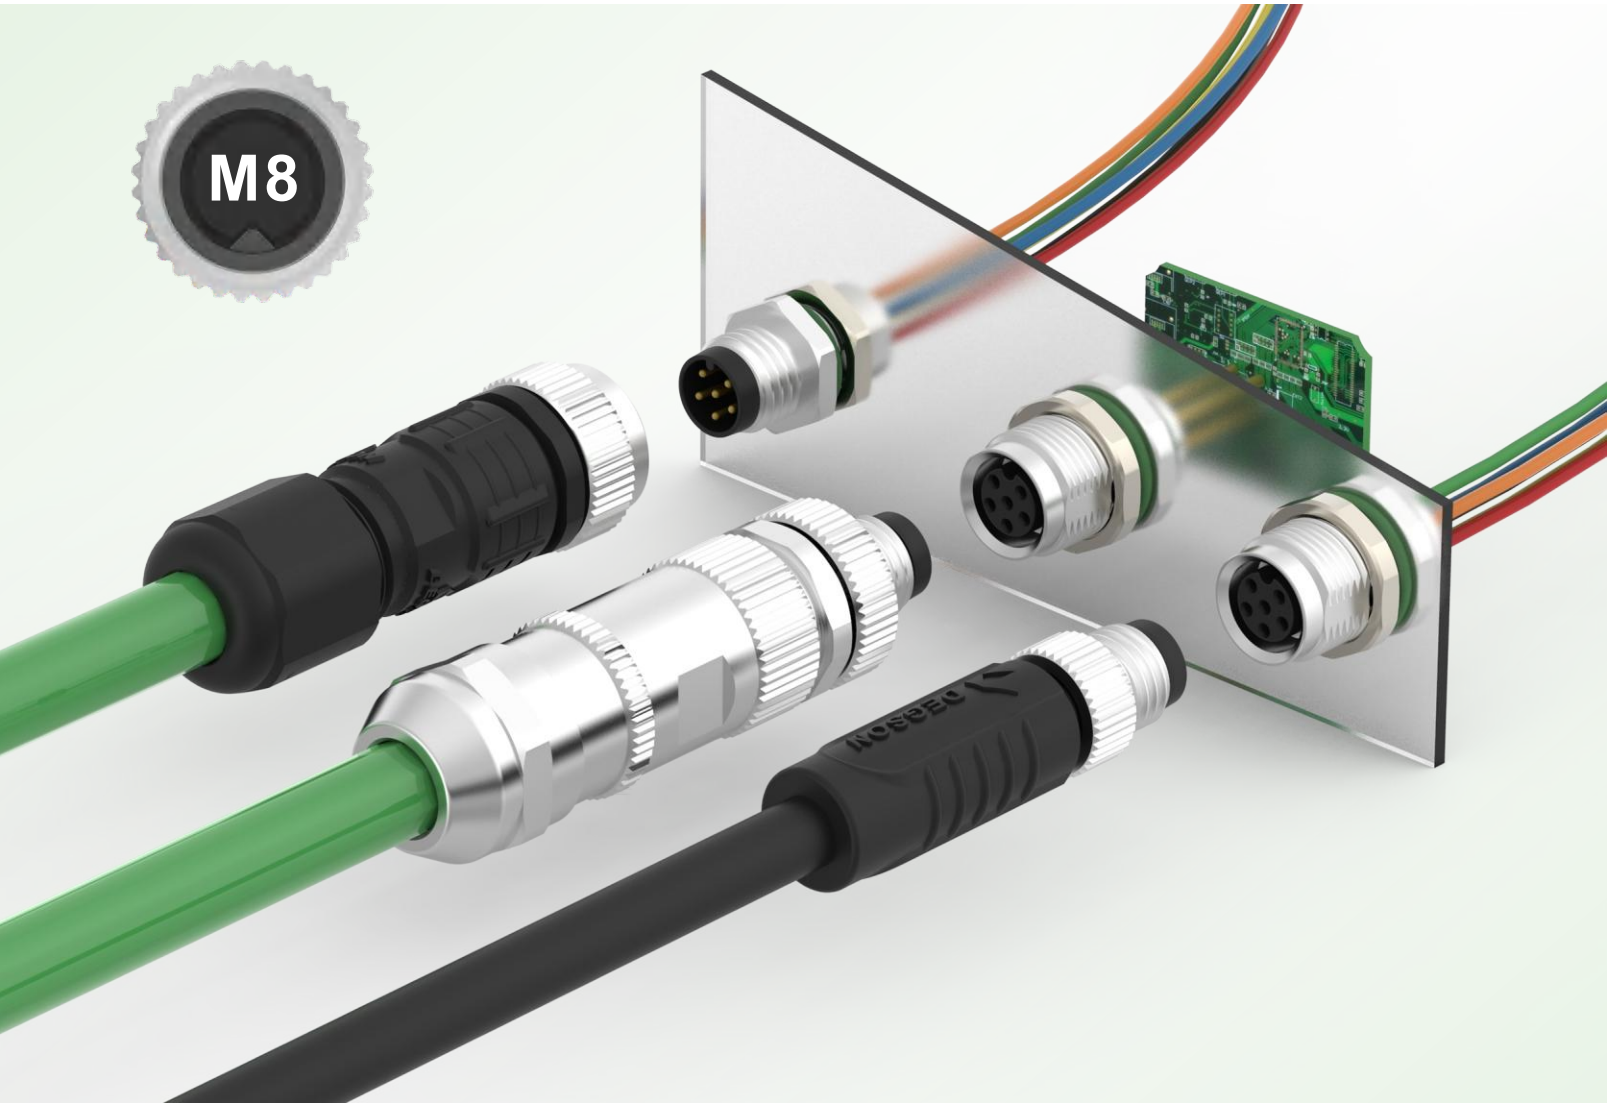

Advantages

- Good sealing performance ,with IP class up to IP 67.
- Dimension optimization,save space.
- Shield is optional,provide reliable electromagnetic protection.
- Wire connection method is optional, suitable for continuous shock and vibration environment.
- Connection technology is suitable for all application field.
- Compatible with same series connectors on the market.


Features

- Cable material: PUR, PVC.
- IP-class: IP67.
- Shield is optional.
- Wire connection is optional.
- Compliance with IEC 61076 standard.




Circular Connectors Part Number

Circular Connectors Part Number Reference

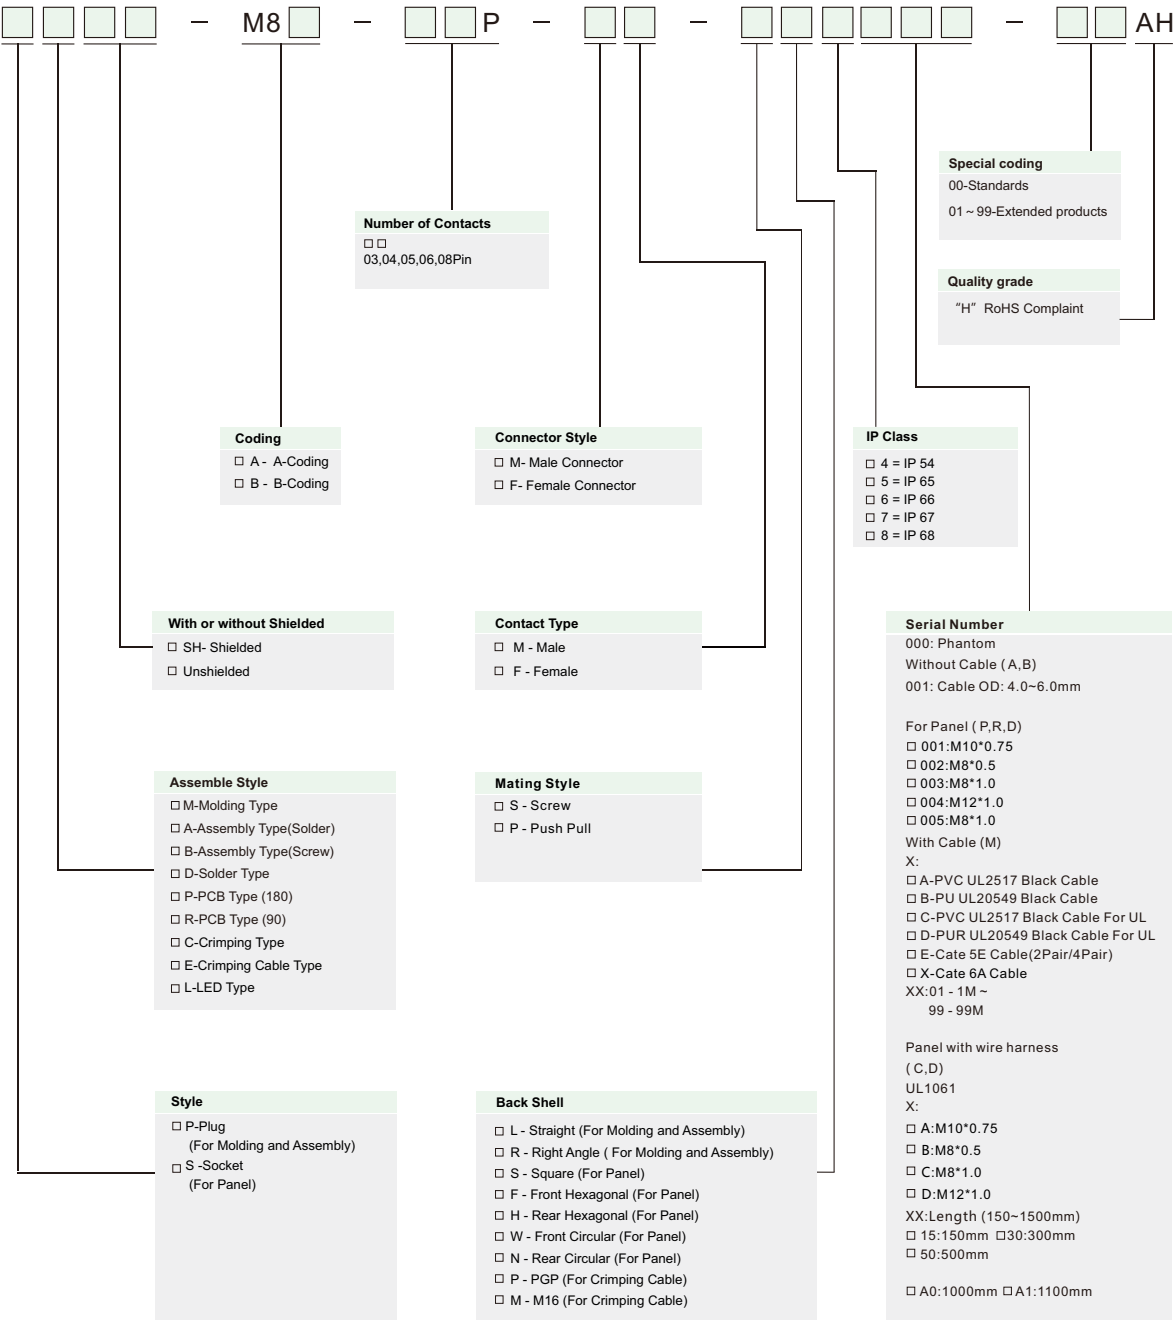

For example:
1. M8 female plug 5Pin: PM-M8B-05P-FF-SL7A01-00A(H)
Details: Plastic covered at the end of wire,M8 B-Coding, 5Pin, female socket female Pin, thread locked, straight head, IP67, PVC black kacket.
Covered by UL2517 wire, the length of 1.0M, standard products.

M8 x 1 Male Overmolded with Cable plug,Single end,Unshielded,Straight.

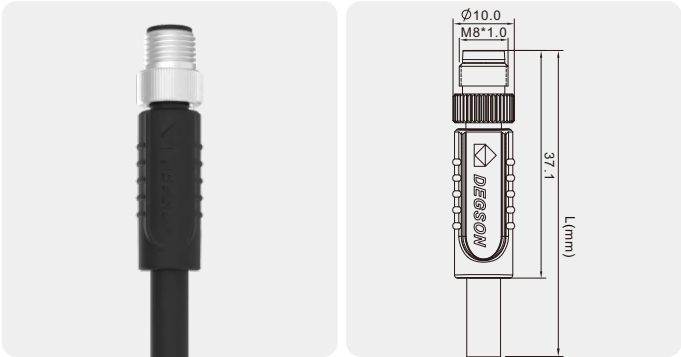


Technical Data

Standard	IEC 61076	Contact carriers material	PU / PA
Series	M8, Male,Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Wire/Cable	Wire gauge	24AWG	24AWG	24AWG	26AWG	26AWG
	Cross section	0.25mm²	0.25mm²	0.25mm²	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 5.GY 6.PK	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	1m	PM-M8A-03P-MM-SL7A01-00AH	PM-M8A-04P-MM-SL7A01-00AH	PM-M8B-05P-MM-SL7A01-00AH	PM-M8A-06P-MM-SL7A01-00AH	PM-M8A-08P-MM-SL7A01-00AH
	3m	PM-M8A-03P-MM-SL7A03-00AH	PM-M8A-04P-MM-SL7A03-00AH	PM-M8B-05P-MM-SL7A03-00AH	PM-M8A-06P-MM-SL7A03-00AH	PM-M8A-08P-MM-SL7A03-00AH
	5m	PM-M8A-03P-MM-SL7A05-00AH	PM-M8A-04P-MM-SL7A05-00AH	PM-M8B-05P-MM-SL7A05-00AH	PM-M8A-06P-MM-SL7A05-00AH	PM-M8A-08P-MM-SL7A05-00AH
	Customized					
PUR	1m	PM-M8A-03P-MM-SL7B01-00AH	PM-M8A-04P-MM-SL7B01-00AH	PM-M8B-05P-MM-SL7B01-00AH	PM-M8A-06P-MM-SL7B01-00AH	PM-M8A-08P-MM-SL7B01-00AH
	3m	PM-M8A-03P-MM-SL7B03-00AH	PM-M8A-04P-MM-SL7B03-00AH	PM-M8B-05P-MM-SL7B03-00AH	PM-M8A-06P-MM-SL7B03-00AH	PM-M8A-08P-MM-SL7B03-00AH
	5m	PM-M8A-03P-MM-SL7B05-00AH	PM-M8A-04P-MM-SL7B05-00AH	PM-M8B-04P-MM-SL7B05-00AH	PM-M8A-06P-MM-SL7B05-00AH	PM-M8A-08P-MM-SL7B05-00AH
	Customized					
PVC	1m	PM-M8A-03P-MM-SL7C01-00AH	PM-M8A-04P-MM-SL7C01-00AH	PM-M8B-05P-MM-SL7C01-00AH	PM-M8A-06P-MM-SL7C01-00AH	PM-M8A-08P-MM-SL7C01-00AH
	3m	PM-M8A-03P-MM-SL7C03-00AH	PM-M8A-04P-MM-SL7C03-00AH	PM-M8B-05P-MM-SL7C03-00AH	PM-M8A-06P-MM-SL7C03-00AH	PM-M8A-08P-MM-SL7C03-00AH
	5m	PM-M8A-03P-MM-SL7C05-00AH	PM-M8A-04P-MM-SL7C05-00AH	PM-M8B-05P-MM-SL7C05-00AH	PM-M8A-06P-MM-SL7C05-00AH	PM-M8A-08P-MM-SL7C05-00AH
	Customized					
PUR	1m	PM-M8A-03P-MM-SL7D01-00AH	PM-M8A-04P-MM-SL7D01-00AH	PM-M8B-05P-MM-SL7D01-00AH	PM-M8A-06P-MM-SL7D01-00AH	PM-M8A-08P-MM-SL7D01-00AH
	3m	PM-M8A-03P-MM-SL7D03-00AH	PM-M8A-04P-MM-SL7D03-00AH	PM-M8B-05P-MM-SL7D03-00AH	PM-M8A-06P-MM-SL7D03-00AH	PM-M8A-08P-MM-SL7D03-00AH
	5m	PM-M8A-03P-MM-SL7D05-00AH	PM-M8A-04P-MM-SL7D05-00AH	PM-M8B-04P-MM-SL7D05-00AH	PM-M8A-06P-MM-SL7D05-00AH	PM-M8A-08P-MM-SL7D05-00AH
	Customized					

M8 x 1 Male Overmolded with Cable plug,Single end,Unshielded,Angled.

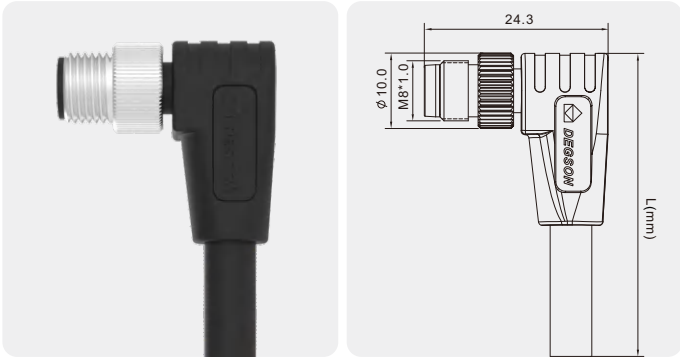


Technical Data

Standard	IEC 61076	Contact carriers material	PU / PA
Series	M8, Male,Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Wire/Cable	Wire gauge	24AWG	24AWG	24AWG	26AWG	26AWG
	Cross section	0.25mm²	0.25mm²	0.25mm²	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 5.GY 6.PK	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	1m	PM-M8A-03P-MM-SR7A01-00AH	PM-M8A-04P-MM-SR7A01-00AH	PM-M8B-05P-MM-SR7A01-00AH	PM-M8A-06P-MM-SR7A01-00AH	PM-M8A-08P-MM-SR7A01-00AH
	3m	PM-M8A-03P-MM-SR7A03-00AH	PM-M8A-04P-MM-SR7A03-00AH	PM-M8B-05P-MM-SR7A03-00AH	PM-M8A-06P-MM-SR7A03-00AH	PM-M8A-08P-MM-SR7A03-00AH
	5m	PM-M8A-03P-MM-SR7A05-00AH	PM-M8A-04P-MM-SR7A05-00AH	PM-M8B-05P-MM-SR7A05-00AH	PM-M8A-06P-MM-SR7A05-00AH	PM-M8A-08P-MM-SR7A05-00AH
	Customized					
PUR	1m	PM-M8A-03P-MM-SR7B01-00AH	PM-M8A-04P-MM-SR7B01-00AH	PM-M8B-05P-MM-SR7B01-00AH	PM-M8A-06P-MM-SR7B01-00AH	PM-M8A-08P-MM-SR7B01-00AH
	3m	PM-M8A-03P-MM-SR7B03-00AH	PM-M8A-04P-MM-SR7B03-00AH	PM-M8B-05P-MM-SR7B03-00AH	PM-M8A-06P-MM-SR7B03-00AH	PM-M8A-08P-MM-SR7B03-00AH
	5m	PM-M8A-03P-MM-SR7B05-00AH	PM-M8A-04P-MM-SR7B05-00AH	PM-M8B-04P-MM-SR7B05-00AH	PM-M8A-06P-MM-SR7B05-00AH	PM-M8A-08P-MM-SR7B05-00AH
	Customized					
PVC	1m	PM-M8A-03P-MM-SR7C01-00AH	PM-M8A-04P-MM-SR7C01-00AH	PM-M8B-05P-MM-SR7C01-00AH	PM-M8A-06P-MM-SR7C01-00AH	PM-M8A-08P-MM-SR7C01-00AH
	3m	PM-M8A-03P-MM-SR7C03-00AH	PM-M8A-04P-MM-SR7C03-00AH	PM-M8B-05P-MM-SR7C03-00AH	PM-M8A-06P-MM-SR7C03-00AH	PM-M8A-08P-MM-SR7C03-00AH
	5m	PM-M8A-03P-MM-SR7C05-00AH	PM-M8A-04P-MM-SR7C05-00AH	PM-M8B-05P-MM-SR7C05-00AH	PM-M8A-06P-MM-SR7C05-00AH	PM-M8A-08P-MM-SR7C05-00AH
	Customized					
PUR	1m	PM-M8A-03P-MM-SR7D01-00AH	PM-M8A-04P-MM-SR7D01-00AH	PM-M8B-05P-MM-SR7D01-00AH	PM-M8A-06P-MM-SR7D01-00AH	PM-M8A-08P-MM-SR7D01-00AH
	3m	PM-M8A-03P-MM-SR7D03-00AH	PM-M8A-04P-MM-SR7D03-00AH	PM-M8B-05P-MM-SR7D03-00AH	PM-M8A-06P-MM-SR7D03-00AH	PM-M8A-08P-MM-SR7D03-00AH
	5m	PM-M8A-03P-MM-SR7D05-00AH	PM-M8A-04P-MM-SR7D05-00AH	PM-M8B-04P-MM-SR7D05-00AH	PM-M8A-06P-MM-SR7D05-00AH	PM-M8A-08P-MM-SR7D05-00AH
	Customized					

M8 x 1 Female Overmolded with Cable plug,Single end,Unshielded,Straight.

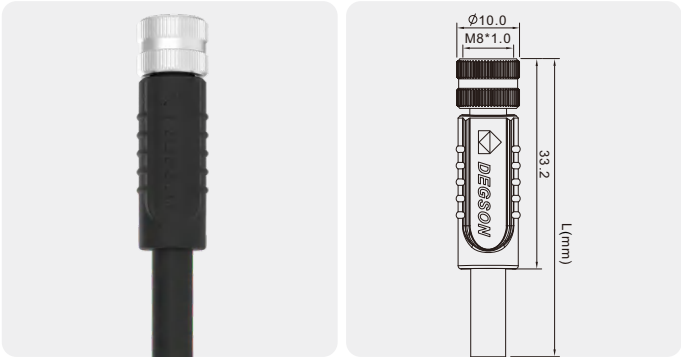


Technical Data

Standard	IEC 61076	Contact carriers material	PU / PA
Series	M8, Female,Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Wire/Cable	Wire gauge	24AWG	24AWG	24AWG	26AWG	26AWG
	Cross section	0.25mm²	0.25mm²	0.25mm²	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK 5.GY 6.PK	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	1m	PM-M8A-03P-FF-SL7A01-00AH	PM-M8A-04P-FF-SL7A01-00AH	PM-M8B-05P-FF-SL7A01-00AH	PM-M8A-06P-FF-SL7A01-00AH	PM-M8A-08P-FF-SL7A01-00AH
	3m	PM-M8A-03P-FF-SL7A03-00AH	PM-M8A-04P-FF-SL7A03-00AH	PM-M8B-05P-FF-SL7A03-00AH	PM-M8A-06P-FF-SL7A03-00AH	PM-M8A-08P-FF-SL7A03-00AH
	5m	PM-M8A-03P-FF-SL7A05-00AH	PM-M8A-04P-FF-SL7A05-00AH	PM-M8B-05P-FF-SL7A05-00AH	PM-M8A-06P-FF-SL7A05-00AH	PM-M8A-08P-FF-SL7A05-00AH
	Customized					
PUR	1m	PM-M8A-03P-FF-SL7B01-00AH	PM-M8A-04P-FF-SL7B01-00AH	PM-M8B-05P-FF-SL7B01-00AH	PM-M8A-06P-FF-SL7B01-00AH	PM-M8A-08P-FF-SL7B01-00AH
	3m	PM-M8A-03P-FF-SL7B03-00AH	PM-M8A-04P-FF-SL7B03-00AH	PM-M8B-05P-FF-SL7B03-00AH	PM-M8A-06P-FF-SL7B03-00AH	PM-M8A-08P-FF-SL7B03-00AH
	5m	PM-M8A-03P-FF-SL7B05-00AH	PM-M8A-04P-FF-SL7B05-00AH	PM-M8B-05P-FF-SL7B05-00AH	PM-M8A-06P-FF-SL7B05-00AH	PM-M8A-08P-FF-SL7B05-00AH
	Customized					
PVC	1m	PM-M8A-03P-FF-SL7C01-00AH	PM-M8A-04P-FF-SL7C01-00AH	PM-M8B-05P-FF-SL7C01-00AH	PM-M8A-06P-FF-SL7C01-00AH	PM-M8A-08P-FF-SL7A01-00AH
	3m	PM-M8A-03P-FF-SL7C03-00AH	PM-M8A-04P-FF-SL7C03-00AH	PM-M8B-05P-FF-SL7C03-00AH	PM-M8A-06P-FF-SL7C03-00AH	PM-M8A-08P-FF-SL7A03-00AH
	5m	PM-M8A-03P-FF-SL7C05-00AH	PM-M8A-04P-FF-SL7C05-00AH	PM-M8B-05P-FF-SL7C05-00AH	PM-M8A-06P-FF-SL7C05-00AH	PM-M8A-08P-FF-SL7A05-00AH
	Customized					
PUR	1m	PM-M8A-03P-FF-SL7D01-00AH	PM-M8A-04P-FF-SL7D01-00AH	PM-M8B-05P-FF-SL7D01-00AH	PM-M8A-06P-FF-SL7D01-00AH	PM-M8A-08P-FF-SL7D01-00AH
	3m	PM-M8A-03P-FF-SL7D03-00AH	PM-M8A-04P-FF-SL7D03-00AH	PM-M8B-05P-FF-SL7D03-00AH	PM-M8A-06P-FF-SL7D03-00AH	PM-M8A-08P-FF-SL7D03-00AH
	5m	PM-M8A-03P-FF-SL7D05-00AH	PM-M8A-04P-FF-SL7D05-00AH	PM-M8B-05P-FF-SL7D05-00AH	PM-M8A-06P-FF-SL7D05-00AH	PM-M8A-08P-FF-SL7D05-00AH
	Customized					

M8 x 1 Female Overmolded with Cable plug, Single end,Unshielded,Angled.

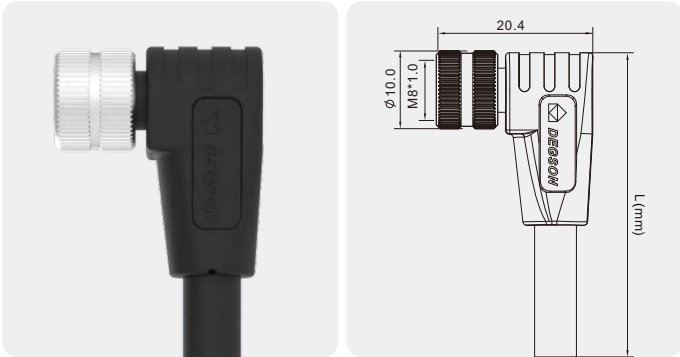


Technical Data

Standard	IEC 61076	Contact carriers material	PU / PA
Series	M8, Female,Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Wire/Cable	Wire gauge	24AWG	24AWG	24AWG	26AWG	26AWG
	Cross section	0.25mm²	0.25mm²	0.25mm²	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK 5.GY 6.PK	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	1m	PM-M8A-03P-FF-SR7A01-00AH	PM-M8A-04P-FF-SR7A01-00AH	PM-M8B-05P-FF-SR7A01-00AH	PM-M8A-06P-FF-SR7A01-00AH	PM-M8A-08P-FF-SR7A01-00AH
	3m	PM-M8A-03P-FF-SR7A03-00AH	PM-M8A-04P-FF-SR7A03-00AH	PM-M8B-05P-FF-SR7A03-00AH	PM-M8A-06P-FF-SR7A03-00AH	PM-M8A-08P-FF-SR7A03-00AH
	5m	PM-M8A-03P-FF-SR7A05-00AH	PM-M8A-04P-FF-SR7A05-00AH	PM-M8B-05P-FF-SR7A05-00AH	PM-M8A-06P-FF-SR7A05-00AH	PM-M8A-08P-FF-SR7A05-00AH
	Customized					
PUR	1m	PM-M8A-03P-FF-SR7B01-00AH	PM-M8A-04P-FF-SR7B01-00AH	PM-M8B-05P-FF-SR7B01-00AH	PM-M8A-06P-FF-SR7B01-00AH	PM-M8A-08P-FF-SR7B01-00AH
	3m	PM-M8A-03P-FF-SR7B03-00AH	PM-M8A-04P-FF-SR7B03-00AH	PM-M8B-05P-FF-SR7B03-00AH	PM-M8A-06P-FF-SR7B03-00AH	PM-M8A-08P-FF-SR7B03-00AH
	5m	PM-M8A-03P-FF-SR7B05-00AH	PM-M8A-04P-FF-SR7B05-00AH	PM-M8B-05P-FF-SR7B05-00AH	PM-M8A-06P-FF-SR7B05-00AH	PM-M8A-08P-FF-SR7B05-00AH
	Customized					
PVC	1m	PM-M8A-03P-FF-SR7C01-00AH	PM-M8A-04P-FF-SR7C01-00AH	PM-M8B-05P-FF-SR7C01-00AH	PM-M8A-06P-FF-SR7C01-00AH	PM-M8A-08P-FF-SR7C01-00AH
	3m	PM-M8A-03P-FF-SR7C03-00AH	PM-M8A-04P-FF-SR7C03-00AH	PM-M8B-05P-FF-SR7C03-00AH	PM-M8A-06P-FF-SR7C03-00AH	PM-M8A-08P-FF-SR7C03-00AH
	5m	PM-M8A-03P-FF-SR7C05-00AH	PM-M8A-04P-FF-SR7C05-00AH	PM-M8B-05P-FF-SR7C05-00AH	PM-M8A-06P-FF-SR7C05-00AH	PM-M8A-08P-FF-SR7C05-00AH
	Customized					
PUR	1m	PM-M8A-03P-FF-SR7D01-00AH	PM-M8A-04P-FF-SR7D01-00AH	PM-M8B-05P-FF-SR7D01-00AH	PM-M8A-06P-FF-SR7D01-00AH	PM-M8A-08P-FF-SR7D01-00AH
	3m	PM-M8A-03P-FF-SR7D03-00AH	PM-M8A-04P-FF-SR7D03-00AH	PM-M8B-05P-FF-SR7D03-00AH	PM-M8A-06P-FF-SR7D03-00AH	PM-M8A-08P-FF-SR7D03-00AH
	5m	PM-M8A-03P-FF-SR7D05-00AH	PM-M8A-04P-FF-SR7D05-00AH	PM-M8B-05P-FF-SR7D05-00AH	PM-M8A-06P-FF-SR7D05-00AH	PM-M8A-08P-FF-SR7D05-00AH
	Customized					

M8 x 1 Male Overmolded with Cable plug, Single end, Shielded, Straight.

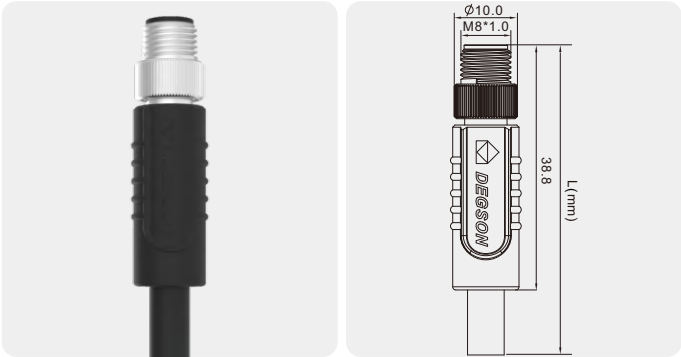


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Wire/Cable	Wire gauge	24AWG	24AWG	24AWG	26AWG	26AWG
	Cross section	0.25mm²	0.25mm²	0.25mm²	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK 5.GY 6.PK	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
	PVC	1m	PMSH-M8A-03P-MM-SL7C01-00AH	PMSH-M8A-04P-MM-SL7C01-00AH	PMSH-M8B-05P-MM-SL7C01-00AH	PMSH-M8A-06P-MM-SL7C01-00AH
		3m	PMSH-M8A-03P-MM-SL7C03-00AH	PMSH-M8A-04P-MM-SL7C03-00AH	PMSH-M8B-05P-MM-SL7C03-00AH	PMSH-M8A-06P-MM-SL7C03-00AH
		5m	PMSH-M8A-03P-MM-SL7C05-00AH	PMSH-M8A-04P-MM-SL7C05-00AH	PMSH-M8B-05P-MM-SL7C05-00AH	PMSH-M8A-06P-MM-SL7C05-00AH
		Customized				
	PUR	1m	PMSH-M8A-03P-MM-SL7D01-00AH	PMSH-M8A-04P-MM-SL7D01-00AH	PMSH-M8B-05P-MM-SL7D01-00AH	PMSH-M8A-06P-MM-SL7D01-00AH
		3m	PMSH-M8A-03P-MM-SL7D03-00AH	PMSH-M8A-04P-MM-SL7D03-00AH	PMSH-M8B-05P-MM-SL7D03-00AH	PMSH-M8A-06P-MM-SL7D03-00AH
		5m	PMSH-M8A-03P-MM-SL7D05-00AH	PMSH-M8A-04P-MM-SL7D05-00AH	PMSH-M8B-04P-MM-SL7D05-00AH	PMSH-M8A-06P-MM-SL7D05-00AH
		Customized				

M8 x 1 Male Overmolded with Cable plug, Single end, Shielded, Angled.

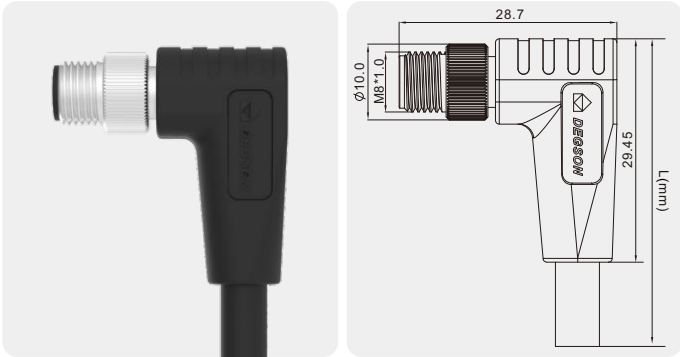


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male, Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Wire/Cable	Wire gauge	24AWG	24AWG	24AWG	26AWG	26AWG
	Cross section	0.25mm²	0.25mm²	0.25mm²	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK 5.GY 6.PK	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
	PVC	1m	PMSH-M8A-03P-MM-SR7C01-00AH	PMSH-M8A-04P-MM-SR7C01-00AH	PMSH-M8B-05P-MM-SR7C01-00AH	PMSH-M8A-06P-MM-SR7C01-00AH
		3m	PMSH-M8A-03P-MM-SR7C03-00AH	PMSH-M8A-04P-MM-SR7C03-00AH	PMSH-M8B-05P-MM-SR7C03-00AH	PMSH-M8A-06P-MM-SR7C03-00AH
		5m	PMSH-M8A-03P-MM-SR7C05-00AH	PMSH-M8A-04P-MM-SR7C05-00AH	PMSH-M8B-05P-MM-SR7C05-00AH	PMSH-M8A-06P-MM-SR7C05-00AH
		Customized				
	PUR	1m	PMSH-M8A-03P-MM-SR7D01-00AH	PMSH-M8A-04P-MM-SR7D01-00AH	PMSH-M8B-05P-MM-SR7D01-00AH	PMSH-M8A-06P-MM-SR7D01-00AH
		3m	PMSH-M8A-03P-MM-SR7D03-00AH	PMSH-M8A-04P-MM-SR7D03-00AH	PMSH-M8B-05P-MM-SR7D03-00AH	PMSH-M8A-06P-MM-SR7D03-00AH
		5m	PMSH-M8A-03P-MM-SR7D05-00AH	PMSH-M8A-04P-MM-SR7D05-00AH	PMSH-M8B-04P-MM-SR7D05-00AH	PMSH-M8A-06P-MM-SR7D05-00AH
		Customized				

M8 x 1 Female Overmolded with Cable plug,Single end,shielded,Straight .

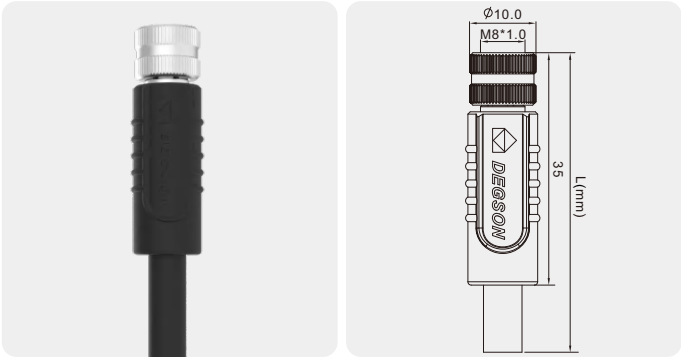


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female,Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Wire/Cable	Wire gauge	24AWG	24AWG	24AWG	26AWG	26AWG
	Cross section	0.25mm²	0.25mm²	0.25mm²	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK 5.GY 6.PK	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
	PVC	1m	PMSH-M8A-03P-FF-SL7C01-00AH	PMSH-M8A-04P-FF-SL7C01-00AH	PMSH-M8B-05P-FF-SL7C01-00AH	PMSH-M8A-06P-FF-SL7C01-00AH
		3m	PMSH-M8A-03P-FF-SL7C03-00AH	PMSH-M8A-04P-FF-SL7C03-00AH	PMSH-M8B-05P-FF-SL7C03-00AH	PMSH-M8A-06P-FF-SL7C03-00AH
		5m	PMSH-M8A-03P-FF-SL7C05-00AH	PMSH-M8A-04P-FF-SL7C05-00AH	PMSH-M8B-05P-FF-SL7C05-00AH	PMSH-M8A-06P-FF-SL7C05-00AH
		Customized				
	PUR	1m	PMSH-M8A-03P-FF-SL7D01-00AH	PMSH-M8A-04P-FF-SL7D01-00AH	PMSH-M8B-05P-FF-SL7D01-00AH	PMSH-M8A-06P-FF-SL7D01-00AH
		3m	PMSH-M8A-03P-FF-SL7D03-00AH	PMSH-M8A-04P-FF-SL7D03-00AH	PMSH-M8B-05P-FF-SL7D03-00AH	PMSH-M8A-06P-FF-SL7D03-00AH
		5m	PMSH-M8A-03P-FF-SL7D05-00AH	PMSH-M8A-04P-FF-SL7D05-00AH	PMSH-M8B-04P-FF-SL7D05-00AH	PMSH-M8A-06P-FF-SL7D05-00AH
		Customized				

M8 x 1 Female Overmolded with Cable plug,Single end,Shielded, Angled.

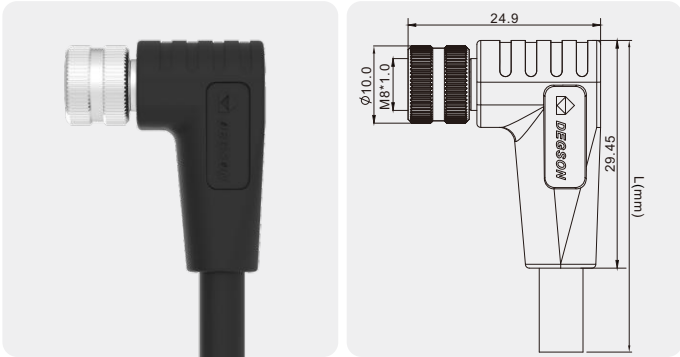


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female,Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Wire/Cable	Wire gauge	24AWG	24AWG	24AWG	26AWG	26AWG
	Cross section	0.25mm²	0.25mm²	0.25mm²	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK 5.GY 6.PK	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
	PVC	1m	PMSH-M8A-03P-FF-SR7C01-00AH	PMSH-M8A-04P-FF-SR7C01-00AH	PMSH-M8B-05P-FF-SR7C01-00AH	PMSH-M8A-06P-FF-SR7C01-00AH
		3m	PMSH-M8A-03P-FF-SR7C03-00AH	PMSH-M8A-04P-FF-SR7C03-00AH	PMSH-M8B-05P-FF-SR7C03-00AH	PMSH-M8A-06P-FF-SR7C03-00AH
		5m	PMSH-M8A-03P-FF-SR7C05-00AH	PMSH-M8A-04P-FF-SR7C05-00AH	PMSH-M8B-05P-FF-SR7C05-00AH	PMSH-M8A-06P-FF-SR7C05-00AH
		定制化 Customized				
	PUR	1m	PMSH-M8A-03P-FF-SR7D01-00AH	PMSH-M8A-04P-FF-SR7D01-00AH	PMSH-M8B-05P-FF-SR7D01-00AH	PMSH-M8A-06P-FF-SR7D01-00AH
		3m	PMSH-M8A-03P-FF-SR7D03-00AH	PMSH-M8A-04P-FF-SR7D03-00AH	PMSH-M8B-05P-FF-SR7D03-00AH	PMSH-M8A-06P-FF-SR7D03-00AH
		5m	PMSH-M8A-03P-FF-SR7D05-00AH	PMSH-M8A-04P-FF-SR7D05-00AH	PMSH-M8B-04P-FF-SR7D05-00AH	PMSH-M8A-06P-FF-SR7D05-00AH
		定制化 Customized				

M8 x 1 Female Overmolded with Cable plug,Single end,Unshielded,Straight,LED .

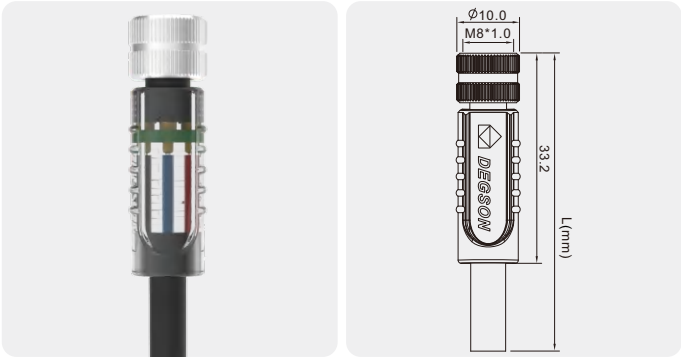


Technical Data

Standard	IEC 61076	Contact carriers material	PU
Series	M8, Female,Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	3A	3A
Rated voltage	V.	60V	60V
Wire/Cable	Wire gauge	24AWG	24AWG
	Cross section	0.25mm²	0.25mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .
PVC	1m	PL-M8A-03P-FF-SL7A01-00AH	PL-M8A-04P-FF-SL7A01-00AH
	3m	PL-M8A-03P-FF-SL7A03-00AH	PL-M8A-04P-FF-SL7A03-00AH
	5m	PL-M8A-03P-FF-SL7A05-00AH	PL-M8A-04P-FF-SL7A05-00AH
	Customized		
PUR	1m	PL-M8A-03P-FF-SL7B01-00AH	PL-M8A-04P-FF-SL7B01-00AH
	3m	PL-M8A-03P-FF-SL7B03-00AH	PL-M8A-04P-FF-SL7B03-00AH
	5m	PL-M8A-03P-FF-SL7B05-00AH	PL-M8A-04P-FF-SL7B05-00AH
	Customized		

M8 x 1 Female Overmolded with Cable plug,Single end.Unshielded, Angled,LED.

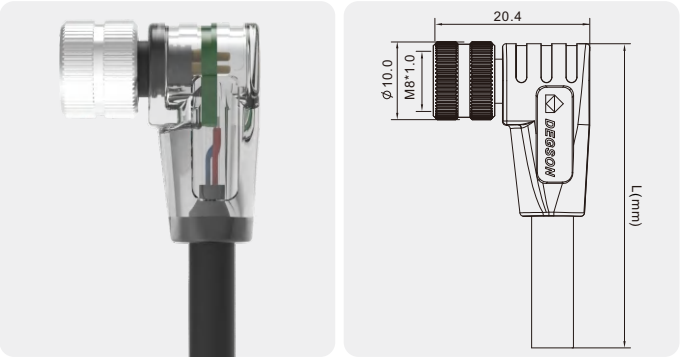


Technical Data

Standard	IEC 61076	Contact carriers material	PU
Series	M8, Female,Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	3A	3A
Rated voltage	V.	60V	60V
Wire/Cable	Wire gauge	24AWG	24AWG
	Cross section	0.25mm²	0.25mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .
PVC	1m	PL-M8A-03P-FF-SR7A01-00AH	PL-M8A-04P-FF-SR7A01-00AH
	3m	PL-M8A-03P-FF-SR7A03-00AH	PL-M8A-04P-FF-SR7A03-00AH
	5m	PL-M8A-03P-FF-SR7A05-00AH	PL-M8A-04P-FF-SR7A05-00AH
	Customized		
PUR	1m	PL-M8A-03P-FF-SR7B01-00AH	PL-M8A-04P-FF-SR7B01-00AH
	3m	PL-M8A-03P-FF-SR7B03-00AH	PL-M8A-04P-FF-SR7B03-00AH
	5m	PL-M8A-03P-FF-SR7B05-00AH	PL-M8A-04P-FF-SR7B05-00AH
	Customized		

M8 x 1 Male Panel Mount Receptacle,
Rear Mounting,with 0.5m wires.

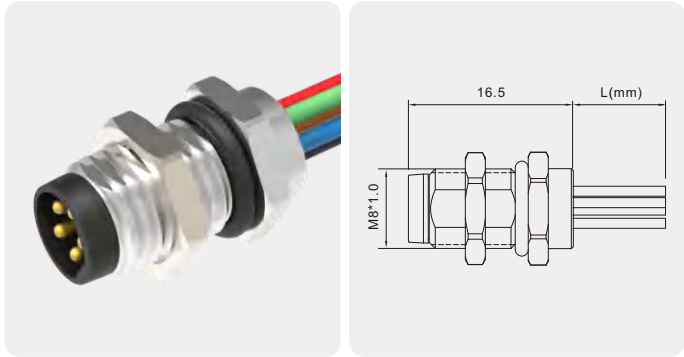


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Wire/Cable	Wire gauge	24AWG	24AWG	24AWG	26AWG	26AWG
	Cross section	0.25mm²	0.25mm²	0.25mm²	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK 5.GY 6.PK	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
0.5m		SD-M8A-03P-MM-SF7C50-00AH	SD-M8A-04P-MM-SF7C50-00AH	SD-M8B-05P-MM-SF7C50-00AH	SD-M8A-06P-MM-SF7C50-00AH	SD-M8A-08P-MM-SF7C50-00AH
Customized						

M8 x 1 Male Panel Mount Receptacle,
Front Mounting,with 0.5m wires.

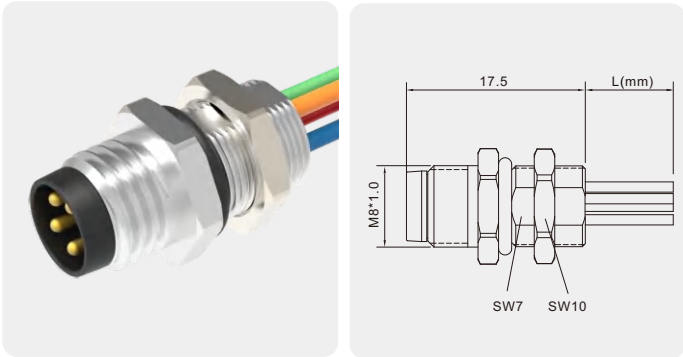


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Wire/Cable	Wire gauge	24AWG	24AWG	24AWG	26AWG	26AWG
	Cross section	0.25mm²	0.25mm²	0.25mm²	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK 5.GY 6.PK	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	订单号 Order NO .
0.5m		SD-M8A-03P-MM-SH7B50-00AH	SD-M8A-04P-MM-SH7B50-00AH	SD-M8B-05P-MM-SH7B50-00AH	SD-M8A-06P-MM-SH7B50-00AH	SD-M8A-08P-MM-SH7B50-00AH
Customized						

M8 x 1 Female Panel Mount
Receptacle ,Rear Mounting,with
0.5m wires.

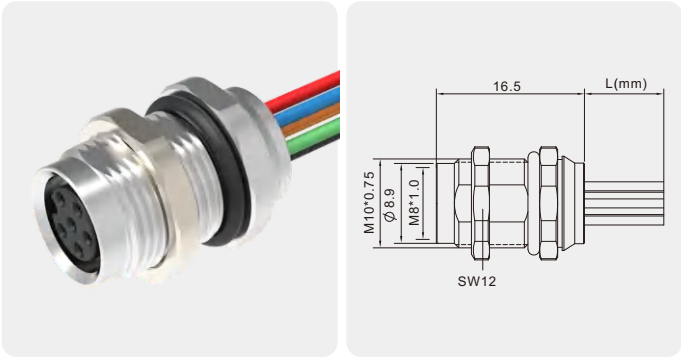


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Wire/Cable	Wire gauge	24AWG	24AWG	24AWG	26AWG	26AWG
	Cross section	0.25mm²	0.25mm²	0.25mm²	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK 5.GY 6.PK	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
0.5m		SD-M8A-03P-FF-SF7A50-00AH	SD-M8A-04P-FF-SF7A50-00AH	SD-M8B-05P-FF-SF7A50-00AH	SD-M8A-06P-FF-SF7A50-00AH	SD-M8A-08P-FF-SF7A50-00AH
Customized						

M8 x 1 Female Panel Mount
Receptacle,Front Mounting,with
0.5m wires.

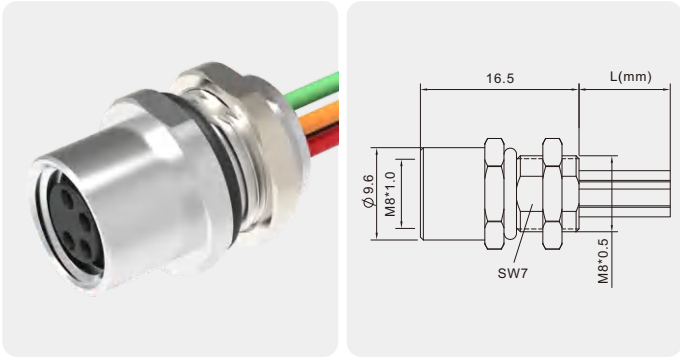


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Wire/Cable	Wire gauge	24AWG	24AWG	24AWG	26AWG	26AWG
	Cross section	0.25mm²	0.25mm²	0.25mm²	0.14mm²	0.14mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK 5.GY 6.PK	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
0.5m		SD-M8A-03P-FF-SH7B50-00AH	SD-M8A-04P-FF-SH7B50-00AH	SD-M8B-05P-FF-SH7B50-00AH	SD-M8A-06P-FF-SH7B50-00AH	SD-M8A-08P-FF-SH7B50-00AH
Customized						

M8 x 1 Male Panel Mount Receptacle,
RearMounting,Unshielded,PCB Soldering.

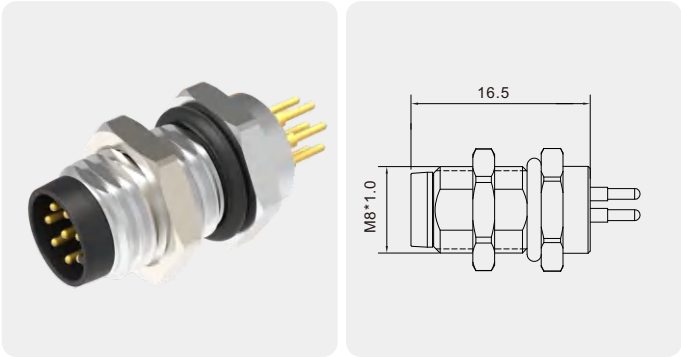


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105℃	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
—		SP-M8A-03P-MM-SF7003-00AH	SP-M8A-04P-MM-SF7003-00AH	SP-M8B-05P-MM-SF7003-00AH	SP-M8A-06P-MM-SF7003-00AH	SP-M8A-08P-MM-SF7003-00AH
Customized						

Dimension Figure

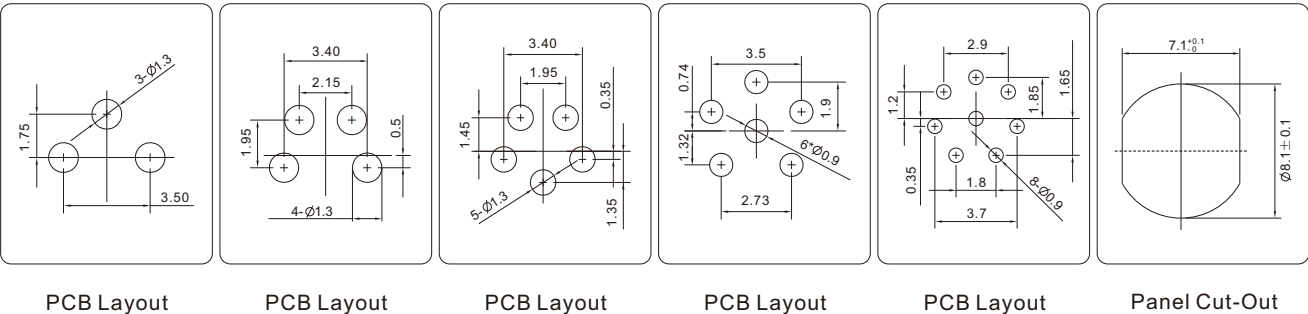

M8 x 1 Female Panel Mount Receptacle,
RearMounting,Unshielded,PCB Soldering.

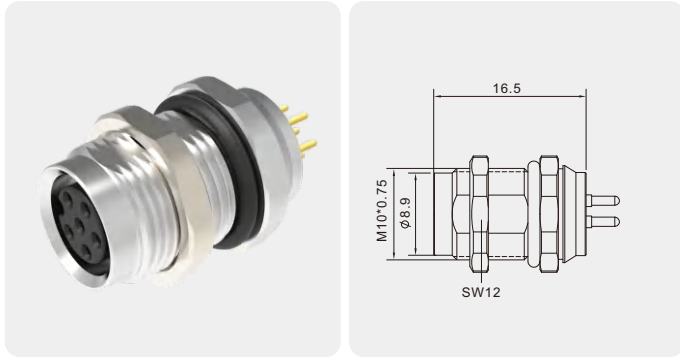


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105℃	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
—		SP-M8A-03P-FF-SF7001-00AH	SP-M8A-04P-FF-SF7001-00AH	SP-M8B-05P-FF-SF7001-00AH	SP-M8A-06P-FF-SF7001-00AH	SP-M8A-08P-FF-SF7001-00AH
Customized						

Dimension Figure

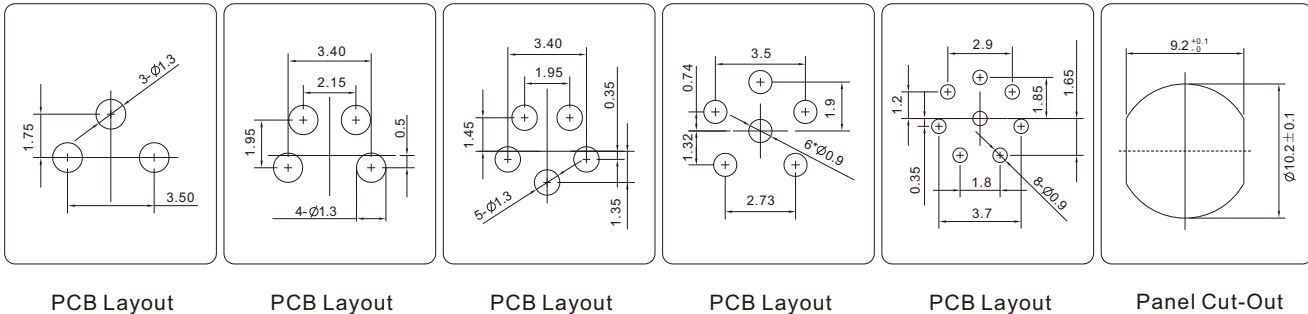

M8 x 1 Male Panel Mount Receptacle,
Rear Mounting, Unshielded, PCB Soldering.

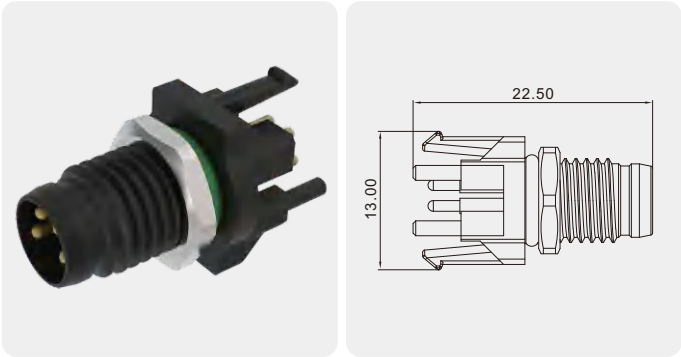


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105℃	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	3A	3A
Rated voltage	V.	60V	60V
Description		Order NO .	Order NO .
—		SP-M8A-03P-MM-SF7005-00AH	SP-M8A-04P-MM-SF7005-00AH
Customized			


Dimension Figure



PCB Layout




PCB Layout



Panel Cut-Out

M8 x 1 Female Panel Mount Receptacle,
Rear Mounting, Unshielded, PCB Soldering.

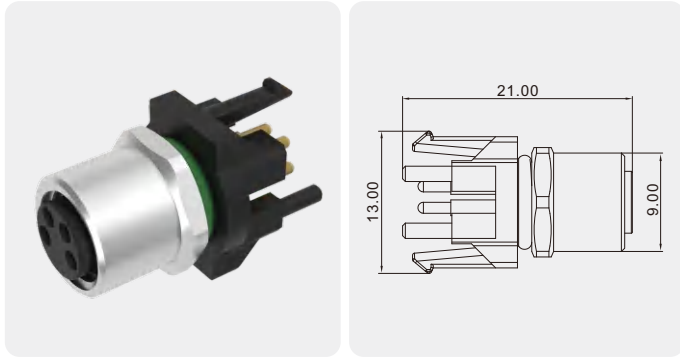


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105℃	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	3A	3A
Rated voltage	V.	60V	60V
Description		Order NO .	Order NO .
—		SP-M8A-03P-MM-SF7005-00AH	SP-M8A-04P-MM-SF7005-00AH
Customized			


Dimension Figure



PCB Layout




PCB Layout



Panel Cut-Out

M8 x 1 Male Panel Mount Receptacle,
Rear Mounting, Unshielded, PCB Soldering.

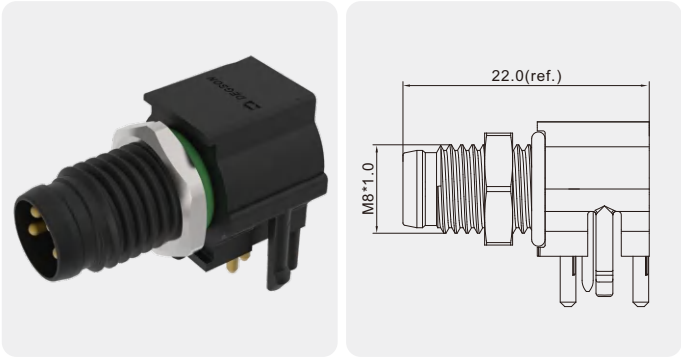


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	3A	3A
Rated voltage	V.	60V	60V
Description		Order NO .	Order NO .
—		SR-M8A-03P-MM-SF7005-00AH	SR-M8A-04P-MM-SF7005-00AH
Customized			


Dimension Figure



PCB Layout




PCB Layout



Panel Cut-Out

M8 x 1 Female Panel Mount Receptacle,
Rear Mounting, Unshielded, PCB Soldering.

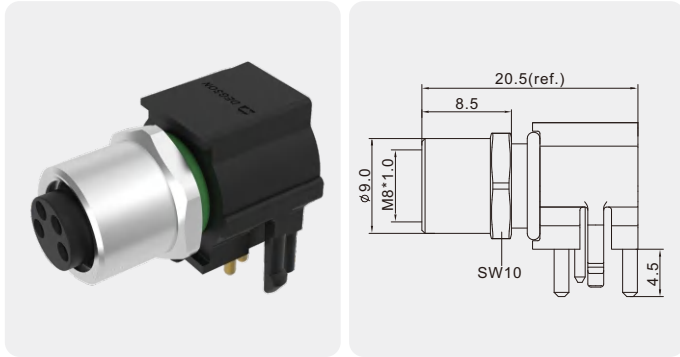


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	3A	3A
Rated voltage	V.	60V	60V
Description		Order NO .	Order NO .
—		SR-M8A-03P-MM-SF7005-00AH	SR-M8A-04P-MM-SF7005-00AH
Customized			


Dimension Figure



PCB Layout




PCB Layout



Panel Cut-Out

M8 x 1 Male Panel Mount Receptacle,
Rear Mounting,Shielded,PCB Soldering.

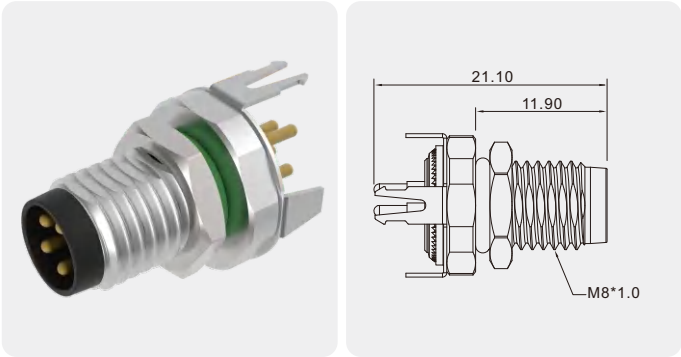


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105℃	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
—		SPSH-M8A-03P-MM-SF7003-00AH	SPSH-M8A-04P-MM-SF7003-00AH	SPSH-M8B-05P-MM-SF7003-00AH	SPSH-M8A-06P-MM-SF7003-00AH	SPSH-M8A-08P-MM-SF7003-00AH
Customized						

Dimension Figure

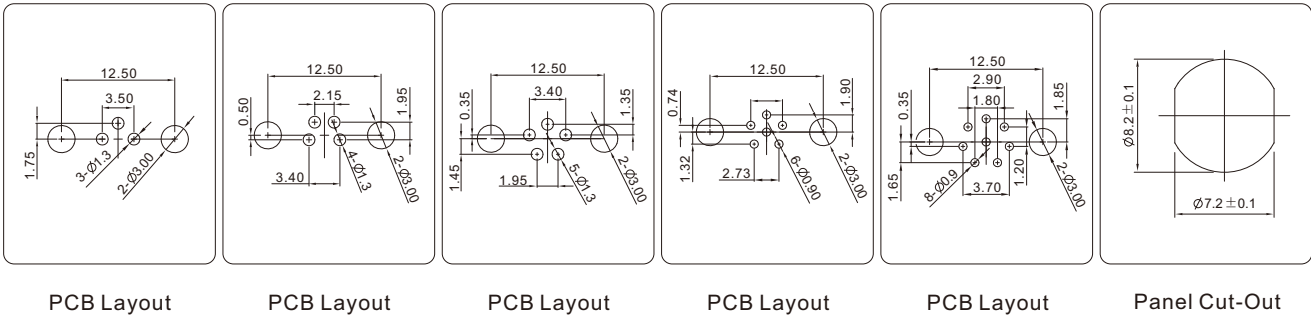

M8 x 1 Female Panel Mount Receptacle,
Rear Mounting,Shielded,PCB Soldering.

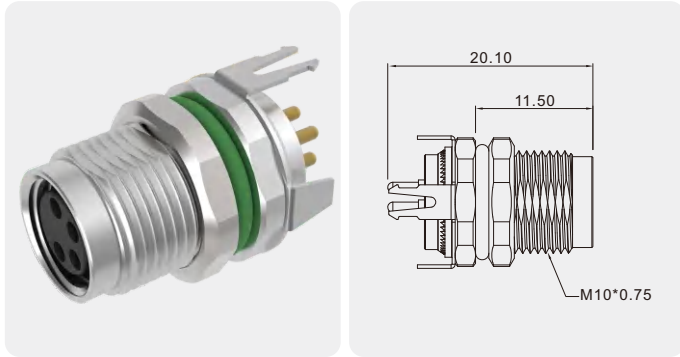


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105℃	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
—		SPSH-M8A-03P-FF-SF7001-00AH	SPSH-M8A-04P-FF-SF7001-00AH	SPSH-M8B-05P-FF-SF7001-00AH	SPSH-M8A-06P-FF-SF7001-00AH	SPSH-M8A-08P-FF-SF7001-00AH
Customized						

Dimension Figure

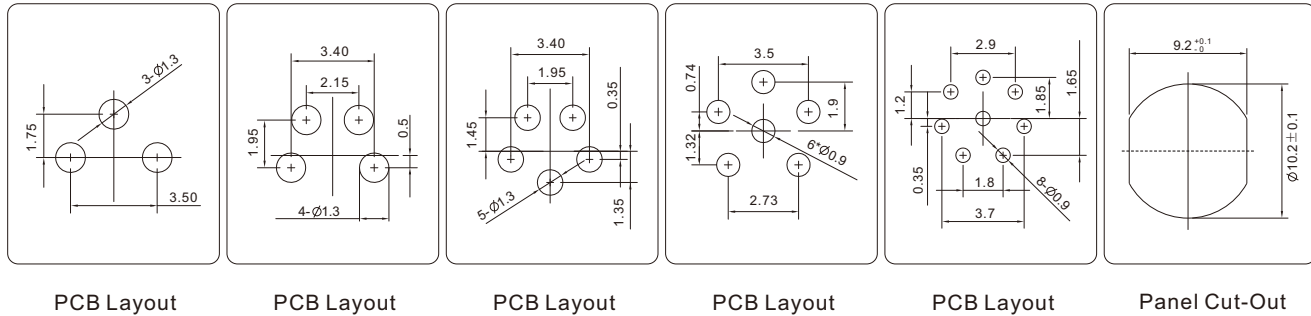

M8 x 1 Male Panel Mount Receptacle,
Rear Mounting,Shielded,PCB Soldering.

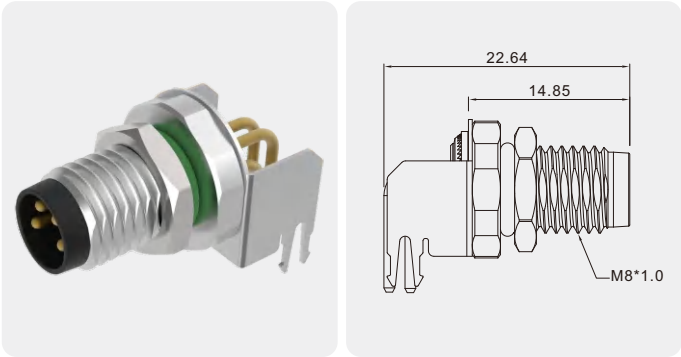


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded
	Front View				
Rated current	A.	3A	3A	3A	1.5A
Rated voltage	V.	60V	60V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .
—		SRSH-M8A-03P-MM-SF7003-00AH	SRSH-M8A-04P-MM-SF7003-00AH	SRSH-M8B-05P-MM-SF7003-00AH	SRSH-M8A-06P-MM-SF7003-00AH
Customized					

Dimension Figure

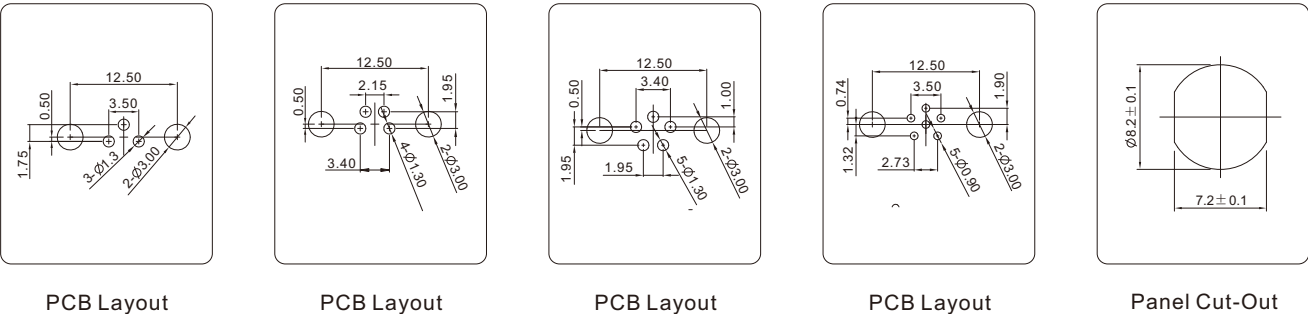

M8 x 1 Female Panel Mount Receptacle,
Rear Mounting,Shielded,PCB Soldering.

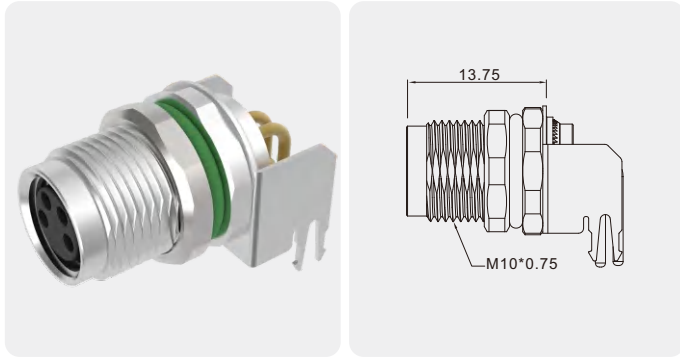


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded
	Front View				
Rated current	A.	3A	3A	3A	1.5A
Rated voltage	V.	60V	60V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .
—		SRSH-M8A-03P-FF-SF7001-00AH	SRSH-M8A-04P-FF-SF7001-00AH	SRSH-M8B-05P-FF-SF7001-00AH	SRSH-M8A-06P-FF-SF7001-00AH
Customized					

Dimension Figure

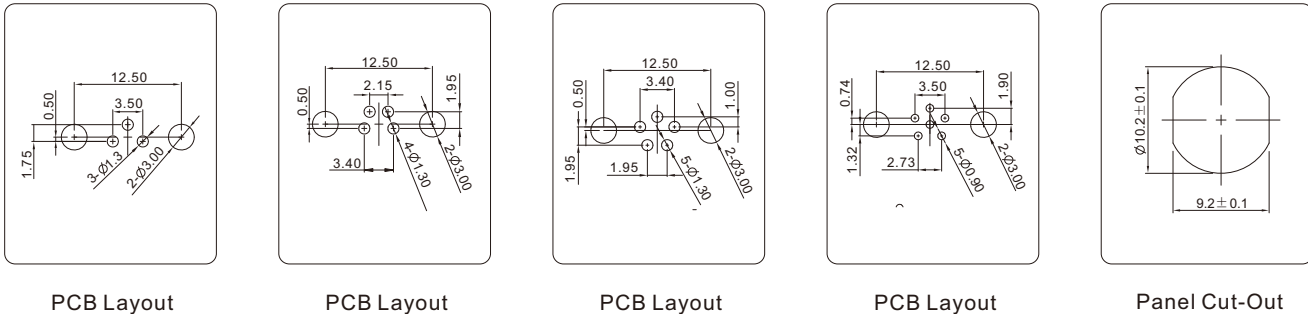

M8 x 1 Male Panel Mount Receptacle, Rear Mounting, Unshielded, Soldering without wire.

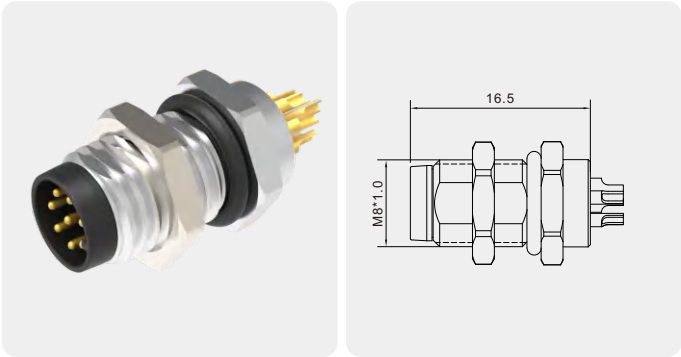


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	—	—
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ + 105°C	—	—
IP Class	IP67	—	—


Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
—		SD-M8A-03P-MM-SF7003-00AH	SD-M8A-04P-MM-SF7003-00AH	SD-M8B-05P-MM-SF7003-00AH	SD-M8A-06P-MM-SF7003-00AH	SD-M8A-08P-MM-SF7003-00AH
Customized						

Dimension Figure



Panel Cut-Out

M8 x 1 Male Panel Mount Receptacle, Front Mounting, Unshielded, Soldering without wire.

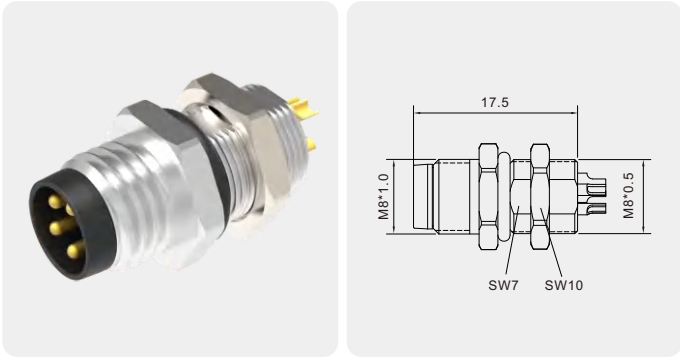


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	—	—
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ + 105°C	—	—
IP Class	IP67	—	—


Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
—		SD-M8A-03P-MM-SH7002-00AH	SD-M8A-04P-MM-SH7002-00AH	SD-M8B-05P-MM-SH7002-00AH	SD-M8A-06P-MM-SH7002-00AH	SD-M8A-08P-MM-SH7002-00AH
Customized						

Dimension Figure



Panel Cut-Out

M8 x 1 Female Panel Mount Receptacle, Rear Mounting, Unshielded, Soldering without wire.

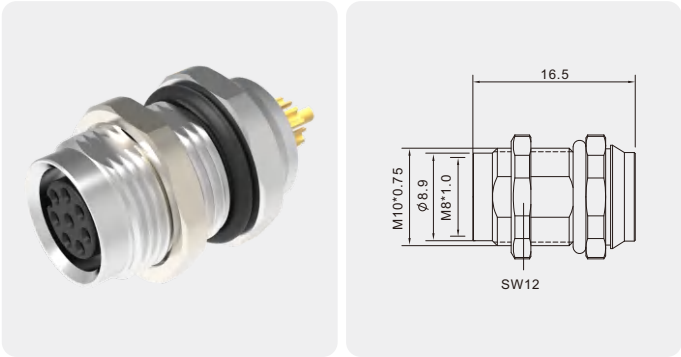


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	—	—
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ + 105°C	—	—
IP Class	IP67	—	—


Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
—		SD-M8A-03P-FF-SF7001-00AH	SD-M8A-04P-FF-SF7001-00AH	SD-M8B-05P-FF-SF7001-00AH	SD-M8A-06P-FF-SF7001-00AH	SD-M8A-08P-FF-SF7001-00AH
Customized						

Dimension Figure



Panel Cut-Out

M8 x 1 Female Panel Mount Receptacle, Front Mounting, Unshielded, Soldering without wire.

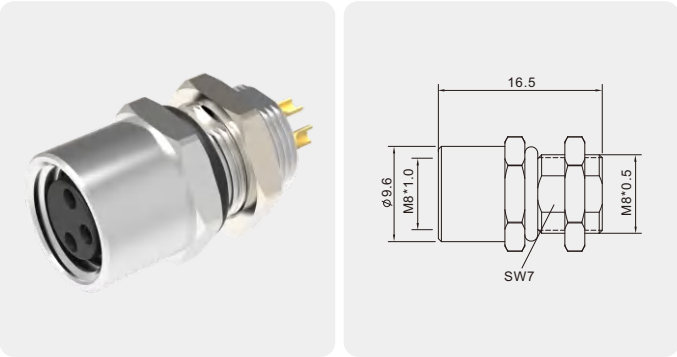


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	—	—
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ + 105°C	—	—
IP Class	IP67	—	—


Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
—		SD-M8A-03P-FF-SH7002-00AH	SD-M8A-04P-FF-SH7002-00AH	SD-M8B-05P-FF-SH7002-00AH	SD-M8A-06P-FF-SH7002-00AH	SD-M8A-08P-FF-SH7002-00AH
Customized						

Dimension Figure



Panel Cut-Out

M8 x 1 Male Field Assembly
Plug.Unshielded,Screw Connection,
Straight.

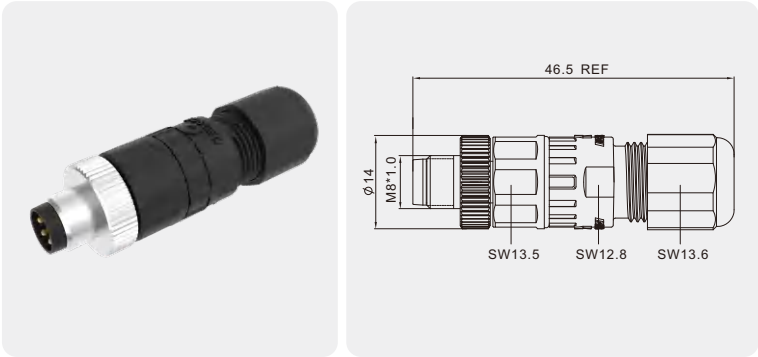


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	3A	3A
Rated voltage	V.	60V	60V
Description		Order NO .	Order NO .
—		PB-M8A-03P-MM-SL7001-00AH	PB-M8A-04P-MM-SL7001-00AH

Component part drawing

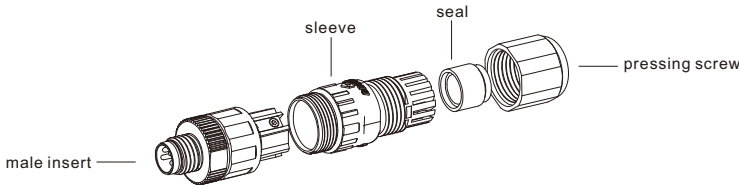

M8 x 1 Female Field Assembly
Plug.Unshielded,Screw Connection,
Straight.

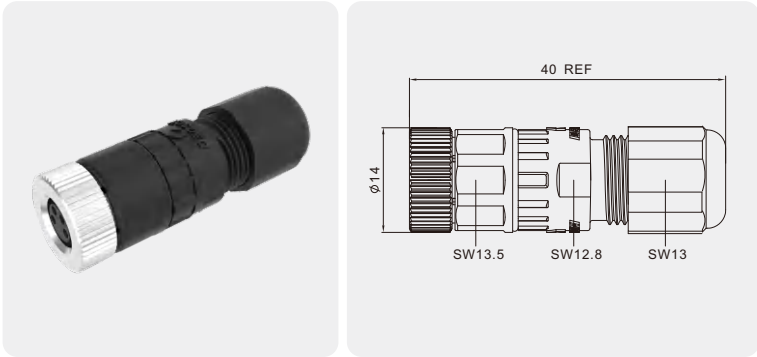


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	3A	3A
Rated voltage	V.	60V	60V
Description		Order NO .	Order NO .
—		PB-M8A-03P-FF-SL7001-00AH	PB-M8A-04P-FF-SL7001-00AH

Component part drawing

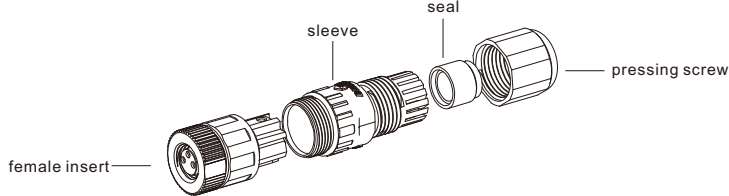

M8 x 1 Male Field Assembly Plug.
Shielded, Screw Connection,
Straight.

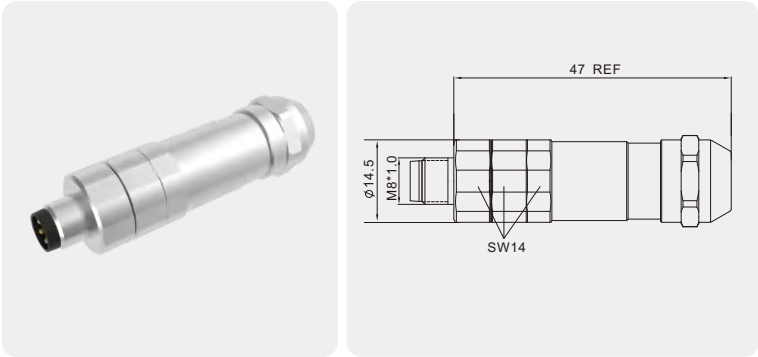


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	3A	3A
Rated voltage	V.	60V	60V
Description		Order NO .	Order NO .
—		PBSH-M8A-03P-MM-SL7001-00AH	PBSH-M8A-04P-MM-SL7001-00AH

Component part drawing

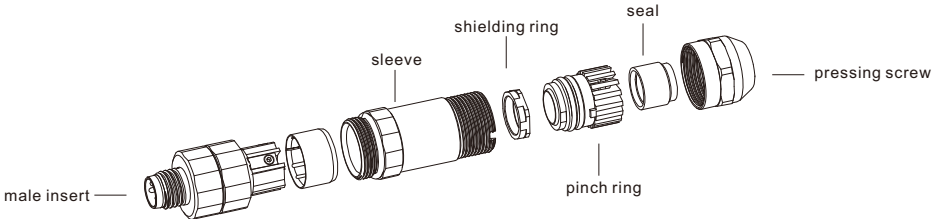

M8 x 1 Female Field Assembly Plug.
Shielded, Screw Connection,
Straight.

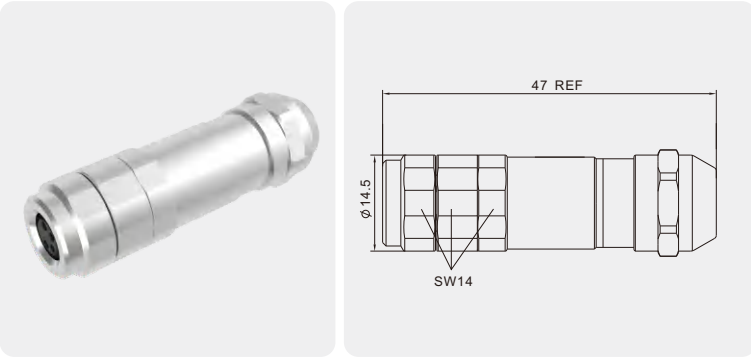


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	3A	3A
Rated voltage	V.	60V	60V
Description		Order NO .	Order NO .
—		PBSH-M8A-03P-FF-SL7001-00AH	PBSH-M8A-04P-FF-SL7001-00AH

Component part drawing

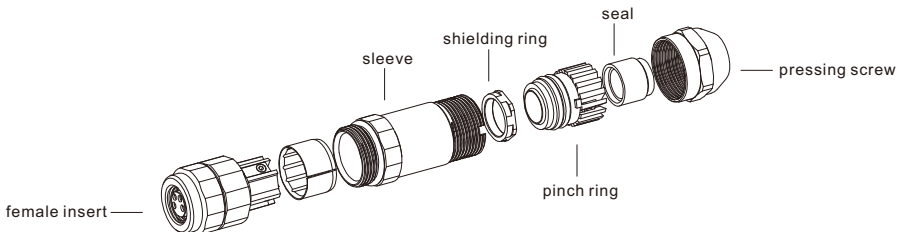

M8 x 1 Male Field Assembly
Plug.Unshielded,Soldering
Connection,Straight.

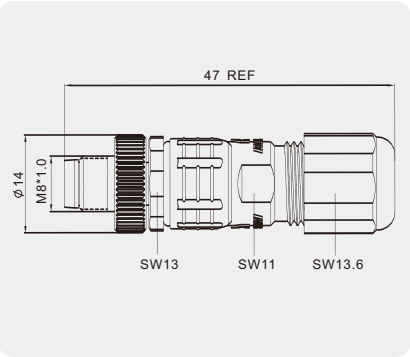


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
—		PA-M8A-03P-MM-SL7001-00AH	PA-M8A-04P-MM-SL7001-00AH	PA-M8B-05P-MM-SL7001-00AH	PA-M8A-06P-MM-SL7001-00AH	PA-M8A-08P-MM-SL7001-00AH

Component part drawing

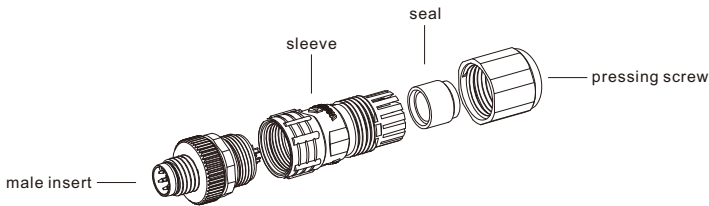

M8 x 1 Female Field Assembly
Plug.Unshielded,Soldering
Connection,Straight.

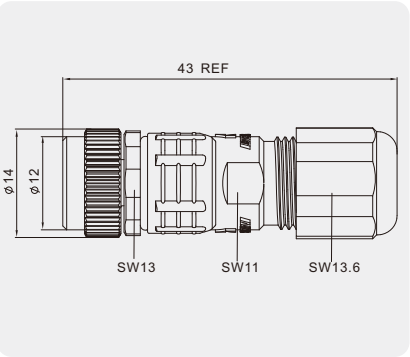


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
—		PA-M8A-03P-FF-SL7001-00AH	PA-M8A-04P-FF-SL7001-00AH	PA-M8B-05P-FF-SL7001-00AH	PA-M8A-06P-FF-SL7001-00AH	PA-M8A-08P-FF-SL7001-00AH

Component part drawing

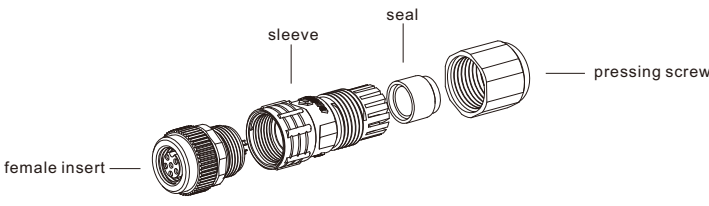

M8 x 1 Male Field Assembly Plug.
Shielded,Soldering Connection,
Straight.

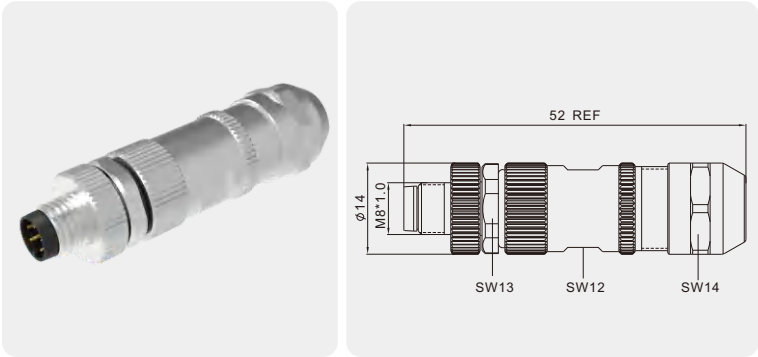


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M8, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 ,05,06,08Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
—		PASH-M8A-03P-MM-SL7001-00AH	PASH-M8A-04P-MM-SL7001-00AH	PASH-M8B-05P-MM-SL7001-00AH	PASH-M8A-06P-MM-SL7001-00AH	PASH-M8A-08P-MM-SL7001-00AH

Component part drawing

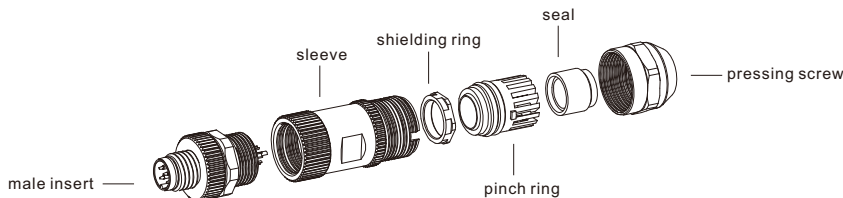

M8 x 1 Female Field Assembly Plug.
Shielded,Soldering Connection,
Straight.

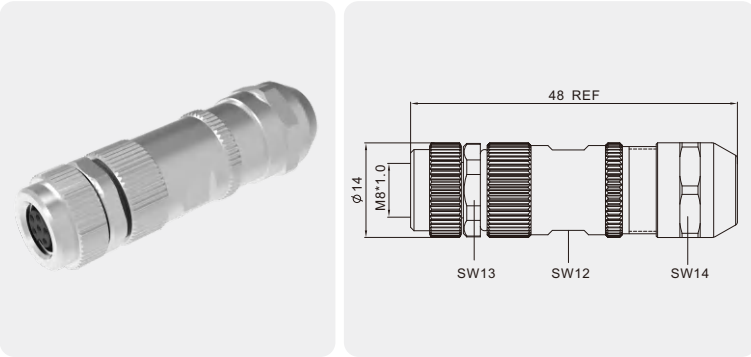



Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M8, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A max.	Seal	Silicone
Rated voltage	60V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	3A	3A	3A	1.5A	1.5A
Rated voltage	V.	60V	60V	30V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
—		PASH-M8A-03P-FF-SL7001-00AH	PASH-M8A-04P-FF-SL7001-00AH	PASH-M8B-05P-FF-SL7001-00AH	PASH-M8A-06P-FF-SL7001-00AH	PASH-M8A-08P-FF-SL7001-00AH

Component part drawing

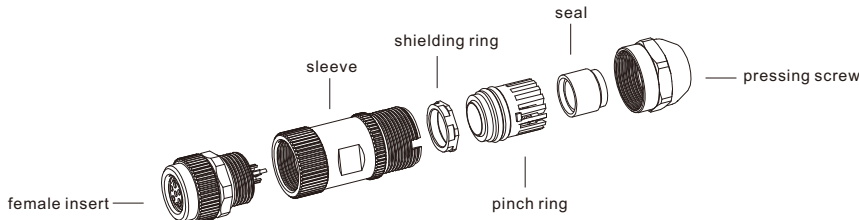

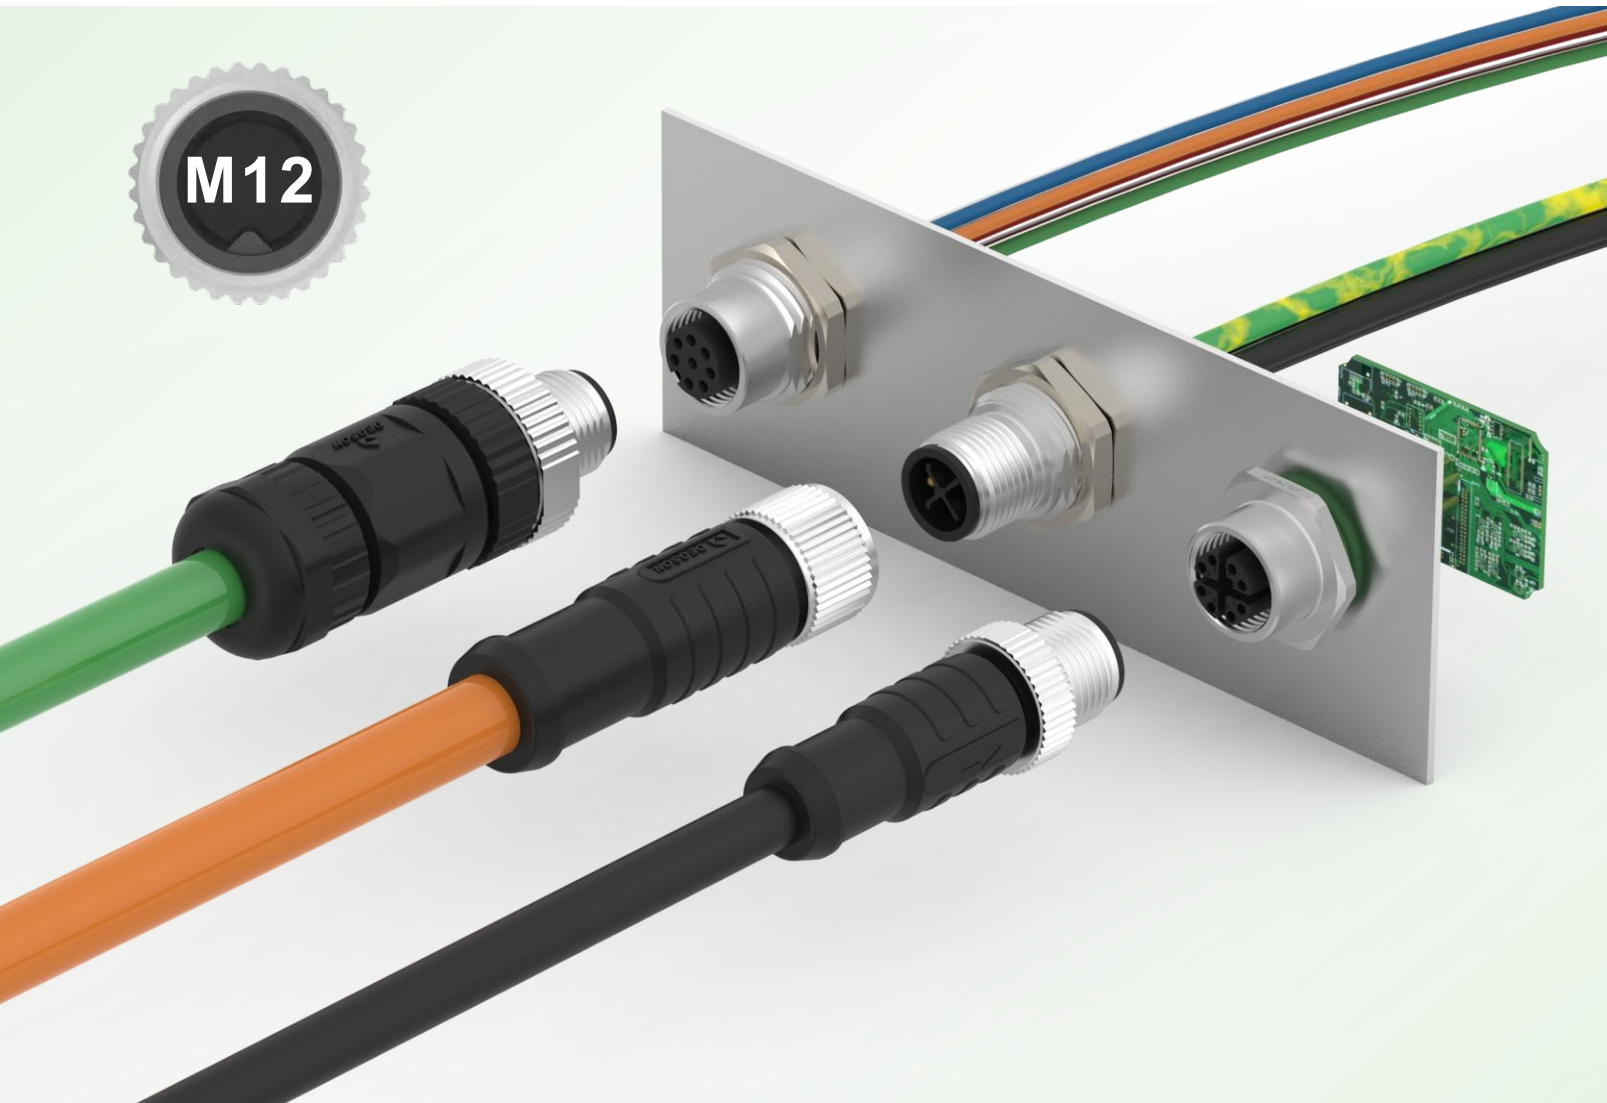

Advantages

- Good sealing performance,with IP class up to IP 68.
- Used in the signal transmission,data transmission, power supply etc.
- With different coding,prevent error connection.
- Shield is optional, provide reliable electromagnetic protection.
- Wire connection method is optional,suitable for continuous shock and vibration environment.
- Connection technology is suitable for all application field.
- Compatible with same series connectors on the market.


Features

- Cable material: PUR, PVC.
- IP-class: IP67, IP68.
- Coding is optional.
- Shield is optional.
- Wire connection method is optional.
- Compliance with IEC 61076 standard.



Circular Connectors Part Number

Circular Connectors Part Number Reference

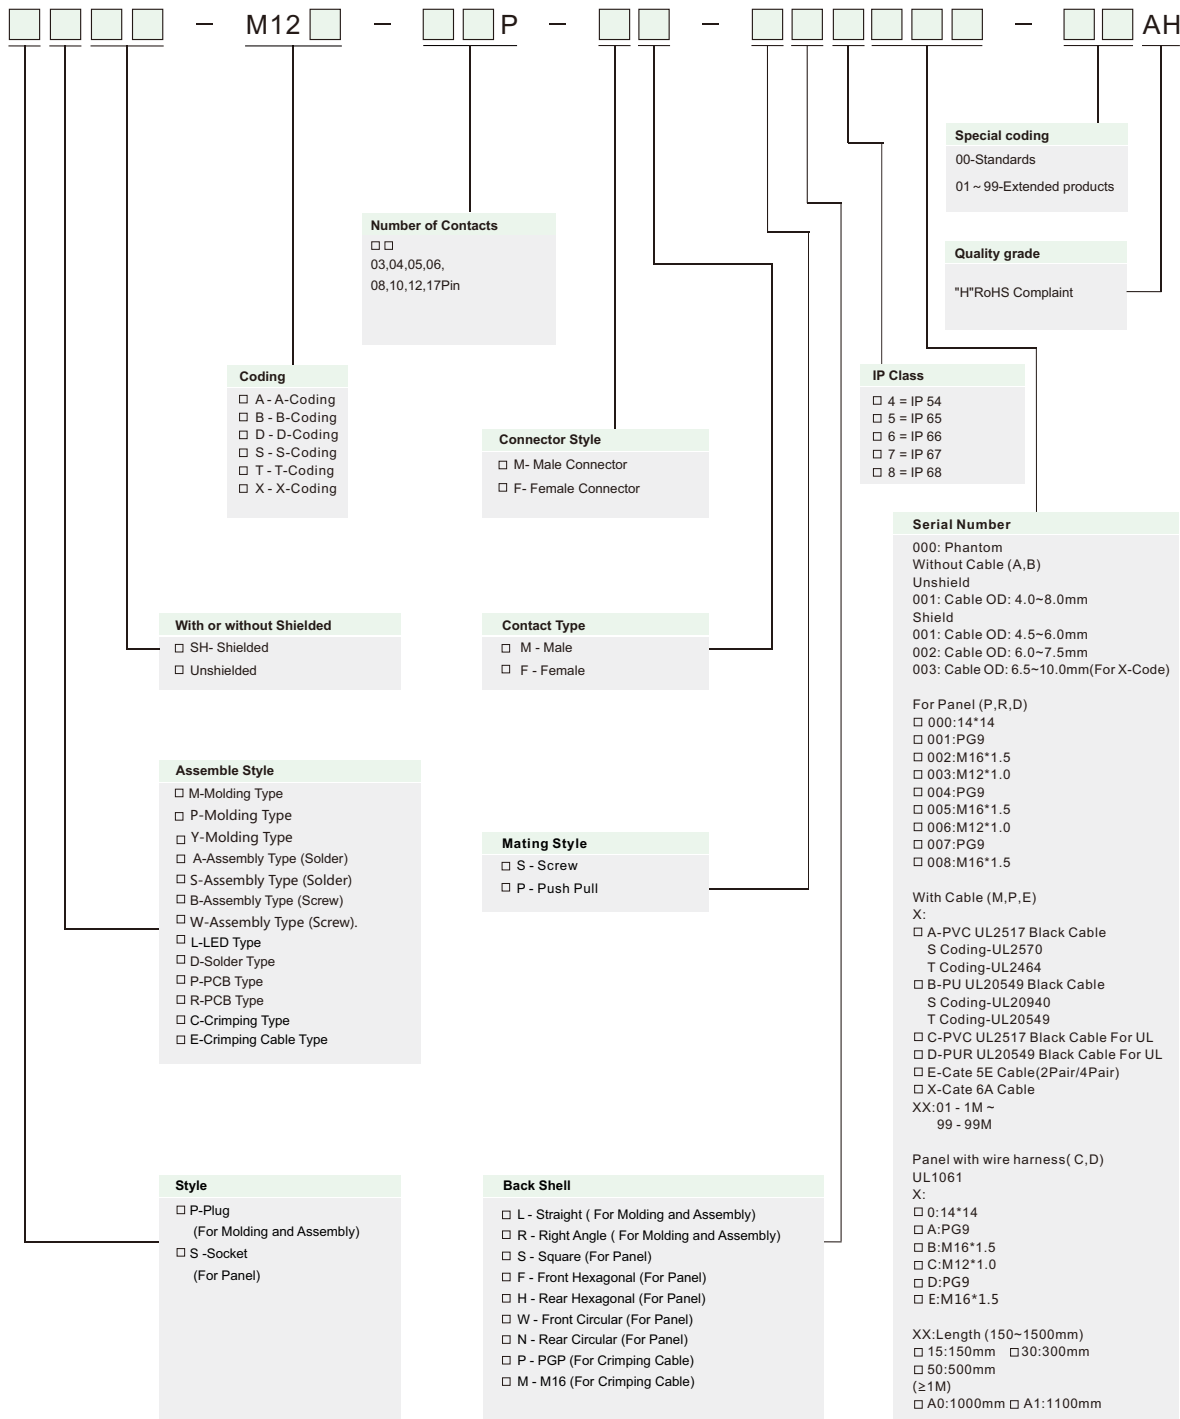

For example:

1. M12 female plug 5Pin: PM-M12A-05P-FF-SL8A01-00A(H)

Details: Plastic covered at the end of wire,M12A-Coding, 5Pin, female socket female Pin, thread locked, straight head, IP68, PVC black kacket.

Covered by UL2517 wire, the length of 1.0M, standard products.

M12 x 1 Male Overmolded with Cable Plug, Single end, Unshielded, Straight.



Technical Data

Standard	IEC 61076	Contact carriers material	PU / PA
Series	M12, Male, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80°C	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	2A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm ²	0.34mm ²	0.34mm ²	0.25mm ²	0.25mm ²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.GN 4.YE 5.GY	1.WH 2.BN 3.GN 4.YE 6.PK 7.BU	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	Metal of nut	1m	PM-M12A-03P-MM-SL8A01-00AH	PM-M12A-04P-MM-SL8A01-00AH	PM-M12A-05P-MM-SL8A01-00AH	PM-M12A-06P-MM-SL8A01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-03P-MM-SL8C01-00AH	PP-M12A-04P-MM-SL8C01-00AH	PP-M12A-05P-MM-SL8C01-00AH	PP-M12A-06P-MM-SL8C01-00AH
		Customized				
PUR	Metal of nut	1m	PM-M12A-03P-MM-SL8B01-00AH	PM-M12A-04P-MM-SL8B01-00AH	PM-M12A-05P-MM-SL8B01-00AH	PM-M12A-06P-MM-SL8B01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-03P-MM-SL8D01-00AH	PP-M12A-04P-MM-SL8D01-00AH	PP-M12A-05P-MM-SL8D01-00AH	PP-M12A-06P-MM-SL8D01-00AH
		Customized				
	PVC	1m	PM-M12A-03P-MM-SL8C01-00AH	PM-M12A-04P-MM-SL8C01-00AH	PM-M12A-05P-MM-SL8C01-00AH	PM-M12A-06P-MM-SL8C01-00AH
		3m	PM-M12A-03P-MM-SL8C03-00AH	PM-M12A-04P-MM-SL8C03-00AH	PM-M12A-05P-MM-SL8C03-00AH	PM-M12A-06P-MM-SL8C03-00AH
		5m	PM-M12A-03P-MM-SL8C05-00AH	PM-M12A-04P-MM-SL8C05-00AH	PM-M12A-05P-MM-SL8C05-00AH	PM-M12A-06P-MM-SL8C05-00AH
		Customized				
	PUR	1m	PM-M12A-03P-MM-SL8D01-00AH	PM-M12A-04P-MM-SL8D01-00AH	PM-M12A-05P-MM-SL8D01-00AH	PM-M12A-06P-MM-SL8D01-00AH
		3m	PM-M12A-03P-MM-SL8D03-00AH	PM-M12A-04P-MM-SL8D03-00AH	PM-M12A-05P-MM-SL8D03-00AH	PM-M12A-06P-MM-SL8D03-00AH
		5m	PM-M12A-03P-MM-SL8D05-00AH	PM-M12A-04P-MM-SL8D05-00AH	PM-M12A-05P-MM-SL8D05-00AH	PM-M12A-06P-MM-SL8D05-00AH
		Customized				

M12 x 1 Male Overmolded with Cable Plug, Single end, Unshielded, Straight.




Technical Data

Standard	IEC 61076	Contact carriers material	PU / PA
Series	M12, Male, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80°C	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm ²	0.14mm ²	0.14mm ²	0.34mm ²	0.34mm ²
	Wiring list	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU 13.WH/GN 14.BN/GN 15.WH/YW 16.YW/BN 17.WH/GY	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	Metal of nut	1m	PM-M12A-10P-MM-SL8A01-00AH	PM-M12A-12P-MM-SL8A01-00AH	PM-M12A-17P-MM-SL8A01-00AH	PM-M12D-04P-MM-SL8A01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-10P-MM-SL8C01-00AH	PP-M12A-12P-MM-SL8C01-00AH	PP-M12A-17P-MM-SL8C01-00AH	PP-M12D-04P-MM-SL8C01-00AH
		Customized				
PUR	Metal of nut	1m	PM-M12A-10P-MM-SL8B01-00AH	PM-M12A-12P-MM-SL8B01-00AH	PM-M12A-17P-MM-SL8B01-00AH	PM-M12D-04P-MM-SL8B01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-10P-MM-SL8D01-00AH	PP-M12A-12P-MM-SL8D01-00AH	PP-M12A-17P-MM-SL8D01-00AH	PP-M12D-04P-MM-SL8D01-00AH
		Customized				
	PVC	1m	PM-M12A-10P-MM-SL8C01-00AH	PM-M12A-12P-MM-SL8C01-00AH	PM-M12A-17P-MM-SL8C01-00AH	PM-M12D-04P-MM-SL8C01-00AH
		3m	PM-M12A-10P-MM-SL8C03-00AH	PM-M12A-12P-MM-SL8C03-00AH	PM-M12A-17P-MM-SL8C03-00AH	PM-M12D-04P-MM-SL8C03-00AH
		5m	PM-M12A-10P-MM-SL8C05-00AH	PM-M12A-12P-MM-SL8C05-00AH	PM-M12A-17P-MM-SL8C05-00AH	PM-M12D-04P-MM-SL8C05-00AH
		Customized				
	PUR	1m	PM-M12A-10P-MM-SL8D01-00AH	PM-M12A-12P-MM-SL8D01-00AH	PM-M12A-17P-MM-SL8D01-00AH	PM-M12D-04P-MM-SL8D01-00AH
		3m	PM-M12A-10P-MM-SL8D03-00AH	PM-M12A-12P-MM-SL8D03-00AH	PM-M12A-17P-MM-SL8D03-00AH	PM-M12D-04P-MM-SL8D03-00AH
		5m	PM-M12A-10P-MM-SL8D05-00AH	PM-M12A-12P-MM-SL8D05-00AH	PM-M12A-17P-MM-SL8D05-00AH	PM-M12D-04P-MM-SL8D05-00AH
		Customized				

M12 x 1 Male Overmolded with Cable Plug, Single end, Unshielded, Angled.

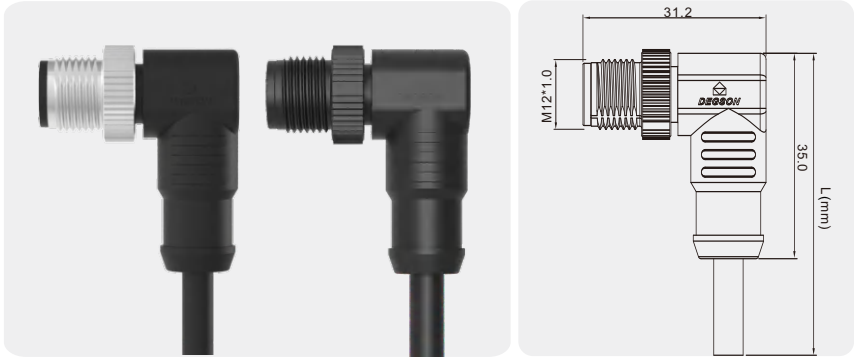


Technical Data

Standard	IEC 61076	Contact carriers material	PU / PA
Series	M12, Male,Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80°C	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm ²	0.34mm ²	0.34mm ²	0.25mm ²	0.25mm ²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.GN 4.YE 5.GY	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	Metal of nut	1m	PM-M12A-03P-MM-SR8A01-00AH	PM-M12A-04P-MM-SR8A01-00AH	PM-M12A-05P-MM-SR8A01-00AH	PM-M12A-06P-MM-SR8A01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-03P-MM-SR8C01-00AH	PP-M12A-04P-MM-SR8C01-00AH	PP-M12A-05P-MM-SR8C01-00AH	PP-M12A-06P-MM-SR8C01-00AH
		Customized				
PUR	Metal of nut	1m	PM-M12A-03P-MM-SR8B01-00AH	PM-M12A-04P-MM-SR8B01-00AH	PM-M12A-05P-MM-SR8B01-00AH	PM-M12A-06P-MM-SR8B01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-03P-MM-SR8D01-00AH	PP-M12A-04P-MM-SR8D01-00AH	PP-M12A-05P-MM-SR8D01-00AH	PP-M12A-06P-MM-SR8D01-00AH
		Customized				
	PVC	1m	PM-M12A-03P-MM-SR8C01-00AH	PM-M12A-04P-MM-SR8C01-00AH	PM-M12A-05P-MM-SR8C01-00AH	PM-M12A-06P-MM-SR8C01-00AH
		3m	PM-M12A-03P-MM-SR8C03-00AH	PM-M12A-04P-MM-SR8C03-00AH	PM-M12A-05P-MM-SR8C03-00AH	PM-M12A-06P-MM-SR8C03-00AH
		5m	PM-M12A-03P-MM-SR8C05-00AH	PM-M12A-04P-MM-SR8C05-00AH	PM-M12A-05P-MM-SR8C05-00AH	PM-M12A-06P-MM-SR8C05-00AH
		Customized				
	PUR	1m	PM-M12A-03P-MM-SR8D01-00AH	PM-M12A-04P-MM-SR8D01-00AH	PM-M12A-05P-MM-SR8D01-00AH	PM-M12A-06P-MM-SR8D01-00AH
		3m	PM-M12A-03P-MM-SR8D03-00AH	PM-M12A-04P-MM-SR8D03-00AH	PM-M12A-05P-MM-SR8D03-00AH	PM-M12A-06P-MM-SR8D03-00AH
		5m	PM-M12A-03P-MM-SR8D05-00AH	PM-M12A-04P-MM-SR8D05-00AH	PM-M12A-05P-MM-SR8D05-00AH	PM-M12A-06P-MM-SR8D05-00AH
		Customized				

M12 x 1 Male Overmolded with Cable Plug, Single end, Unshielded, Angled.

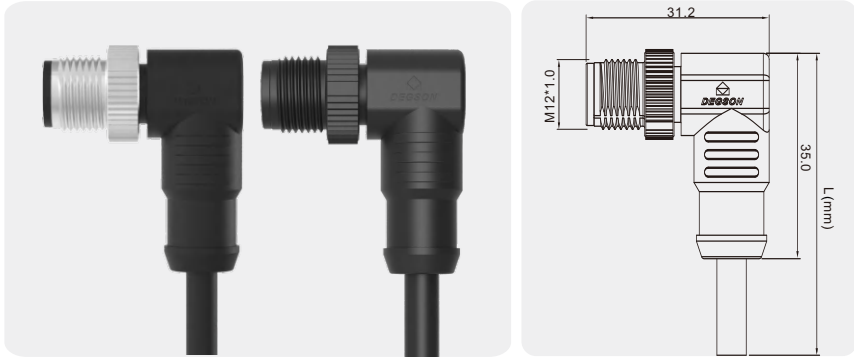


Technical Data

Standard	IEC 61076	Contact carriers material	PU / PA
Series	M12, Male,Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80°C	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm ²	0.14mm ²	0.14mm ²	0.34mm ²	0.34mm ²
	Wiring list	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU 13.WH/GN 14.BN/GN 15.WH/YW 16.YW/BN 17.WH/GY	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	Metal of nut	1m	PM-M12A-10P-MM-SR8A01-00AH	PM-M12A-12P-MM-SR8A01-00AH	PM-M12A-17P-MM-SR8A01-00AH	PM-M12D-04P-MM-SR8A01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-10P-MM-SR8C01-00AH	PP-M12A-12P-MM-SR8C01-00AH	PP-M12A-17P-MM-SR8C01-00AH	PP-M12D-04P-MM-SR8C01-00AH
		Customized				
PUR	Metal of nut	1m	PM-M12A-10P-MM-SR8B01-00AH	PM-M12A-12P-MM-SR8B01-00AH	PM-M12A-17P-MM-SR8B01-00AH	PM-M12D-04P-MM-SR8B01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-10P-MM-SR8D01-00AH	PP-M12A-12P-MM-SR8D01-00AH	PP-M12A-17P-MM-SR8D01-00AH	PP-M12D-04P-MM-SR8D01-00AH
		Customized				
	PVC	1m	PM-M12A-10P-MM-SR8C01-00AH	PM-M12A-12P-MM-SR8C01-00AH	PM-M12A-17P-MM-SR8C01-00AH	PM-M12D-04P-MM-SR8C01-00AH
		3m	PM-M12A-10P-MM-SR8C03-00AH	PM-M12A-12P-MM-SR8C03-00AH	PM-M12A-17P-MM-SR8C03-00AH	PM-M12D-04P-MM-SR8C03-00AH
		5m	PM-M12A-10P-MM-SR8C05-00AH	PM-M12A-12P-MM-SR8C05-00AH	PM-M12A-17P-MM-SR8C05-00AH	PM-M12D-04P-MM-SR8C05-00AH
		Customized				
	PUR	1m	PM-M12A-10P-MM-SR8D01-00AH	PM-M12A-12P-MM-SR8D01-00AH	PM-M12A-17P-MM-SR8D01-00AH	PM-M12D-04P-MM-SR8D01-00AH
		3m	PM-M12A-10P-MM-SR8D03-00AH	PM-M12A-12P-MM-SR8D03-00AH	PM-M12A-17P-MM-SR8D03-00AH	PM-M12D-04P-MM-SR8D03-00AH
		5m	PM-M12A-10P-MM-SR8D05-00AH	PM-M12A-12P-MM-SR8D05-00AH	PM-M12A-17P-MM-SR8D05-00AH	PM-M12D-04P-MM-SR8D05-00AH
		Customized				

M12 x 1 Male Overmolded with Cable Plug, Single end, Shielded, Straight.

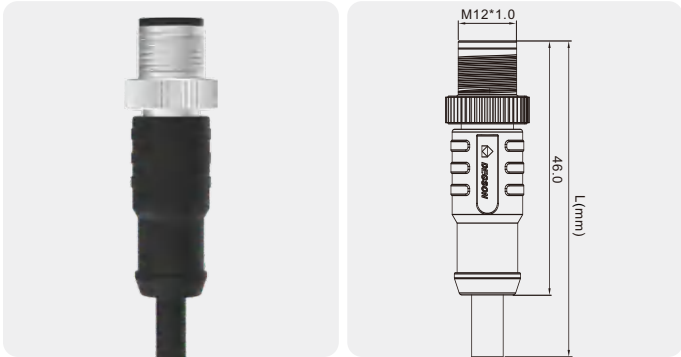


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ +80°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.WH 2.BN 3.GN 4.YE 6.PK 7.BU	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	1m	PMSH-M12A-03P-MM-SL8A01-00AH	PMSH-M12A-04P-MM-SL8A01-00AH	PMSH-M12A-05P-MM-SL8A01-00AH	PMSH-M12A-06P-MM-SL8A01-00AH	PMSH-M12A-08P-MM-SL8A01-00AH
	3m	PMSH-M12A-03P-MM-SL8A03-00AH	PMSH-M12A-04P-MM-SL8A03-00AH	PMSH-M12A-05P-MM-SL8A03-00AH	PMSH-M12A-06P-MM-SL8A03-00AH	PMSH-M12A-08P-MM-SL8A03-00AH
	5m	PMSH-M12A-03P-MM-SL8A05-00AH	PMSH-M12A-04P-MM-SL8A05-00AH	PMSH-M12A-05P-MM-SL8A05-00AH	PMSH-M12A-06P-MM-SL8A05-00AH	PMSH-M12A-08P-MM-SL8A05-00AH
	Customized					
PUR	1m	PMSH-M12A-03P-MM-SL8B01-00AH	PMSH-M12A-04P-MM-SL8B01-00AH	PMSH-M12A-05P-MM-SL8B01-00AH	PMSH-M12A-06P-MM-SL8B01-00AH	PMSH-M12A-08P-MM-SL8B01-00AH
	3m	PMSH-M12A-03P-MM-SL8B03-00AH	PMSH-M12A-04P-MM-SL8B03-00AH	PMSH-M12A-05P-MM-SL8B03-00AH	PMSH-M12A-06P-MM-SL8B03-00AH	PMSH-M12A-08P-MM-SL8B03-00AH
	5m	PMSH-M12A-03P-MM-SL8B05-00AH	PMSH-M12A-04P-MM-SL8B05-00AH	PMSH-M12A-05P-MM-SL8B05-00AH	PMSH-M12A-06P-MM-SL8B05-00AH	PMSH-M12A-08P-MM-SL8B05-00AH
	Customized					
PVC	1m	PMSH-M12A-03P-MM-SL8C01-00AH	PMSH-M12A-04P-MM-SL8C01-00AH	PMSH-M12A-05P-MM-SL8C01-00AH	PMSH-M12A-06P-MM-SL8C01-00AH	PMSH-M12A-08P-MM-SL8C01-00AH
	3m	PMSH-M12A-03P-MM-SL8C03-00AH	PMSH-M12A-04P-MM-SL8C03-00AH	PMSH-M12A-05P-MM-SL8C03-00AH	PMSH-M12A-06P-MM-SL8C03-00AH	PMSH-M12A-08P-MM-SL8C03-00AH
	5m	PMSH-M12A-03P-MM-SL8C05-00AH	PMSH-M12A-04P-MM-SL8C05-00AH	PMSH-M12A-05P-MM-SL8C05-00AH	PMSH-M12A-06P-MM-SL8C05-00AH	PMSH-M12A-08P-MM-SL8C05-00AH
	Customized					
PUR	1m	PMSH-M12A-03P-MM-SL8D01-00AH	PMSH-M12A-04P-MM-SL8D01-00AH	PMSH-M12A-05P-MM-SL8D01-00AH	PMSH-M12A-06P-MM-SL8D01-00AH	PMSH-M12A-08P-MM-SL8D01-00AH
	3m	PMSH-M12A-03P-MM-SL8D03-00AH	PMSH-M12A-04P-MM-SL8D03-00AH	PMSH-M12A-05P-MM-SL8D03-00AH	PMSH-M12A-06P-MM-SL8D03-00AH	PMSH-M12A-08P-MM-SL8D03-00AH
	5m	PMSH-M12A-03P-MM-SL8D05-00AH	PMSH-M12A-04P-MM-SL8D05-00AH	PMSH-M12A-05P-MM-SL8D05-00AH	PMSH-M12A-06P-MM-SL8D05-00AH	PMSH-M12A-08P-MM-SL8D05-00AH
	Customized					

M12 x 1 Male Overmolded with Cable Plug, Single end, Shielded, Straight.

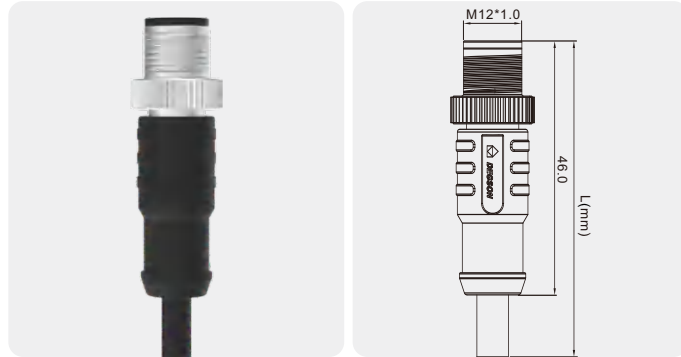


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ +80°C	—	—
IP Class	IP68	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
	Wiring list	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU 13.WH/GN 14.BN/GN 15.WH/YW 16.YW/BN 17.WH/GY	1.BN 2.WH 3.BU 4.BK 5.GY	1.YW 2.WH 3.OG 4.BU
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	1m	PMSH-M12A-10P-MM-SL8A01-00AH	PMSH-M12A-12P-MM-SL8A01-00AH	PMSH-M12A-17P-MM-SL8A01-00AH	PMSH-M12B-05P-MM-SL8A01-00AH	PMSH-M12D-04P-MM-SL8A01-00AH
	3m	PMSH-M12A-10P-MM-SL8A03-00AH	PMSH-M12A-12P-MM-SL8A03-00AH	PMSH-M12A-17P-MM-SL8A03-00AH	PMSH-M12B-05P-MM-SL8A03-00AH	PMSH-M12D-04P-MM-SL8A03-00AH
	5m	PMSH-M12A-10P-MM-SL8A05-00AH	PMSH-M12A-12P-MM-SL8A05-00AH	PMSH-M12A-17P-MM-SL8A05-00AH	PMSH-M12B-05P-MM-SL8A05-00AH	PMSH-M12D-04P-MM-SL8A05-00AH
	Customized					
PUR	1m	PMSH-M12A-10P-MM-SL8B01-00AH	PMSH-M12A-12P-MM-SL8B01-00AH	PMSH-M12A-17P-MM-SL8B01-00AH	PMSH-M12B-05P-MM-SL8B01-00AH	PMSH-M12D-04P-MM-SL8B01-00AH
	3m	PMSH-M12A-10P-MM-SL8B03-00AH	PMSH-M12A-12P-MM-SL8B03-00AH	PMSH-M12A-17P-MM-SL8B03-00AH	PMSH-M12B-05P-MM-SL8B03-00AH	PMSH-M12D-04P-MM-SL8B03-00AH
	5m	PMSH-M12A-10P-MM-SL8B05-00AH	PMSH-M12A-12P-MM-SL8B05-00AH	PMSH-M12A-17P-MM-SL8B05-00AH	PMSH-M12B-05P-MM-SL8B05-00AH	PMSH-M12D-04P-MM-SL8B05-00AH
	Customized					
PVC	1m	PMSH-M12A-10P-MM-SL8C01-00AH	PMSH-M12A-12P-MM-SL8C01-00AH	PMSH-M12A-17P-MM-SL8C01-00AH	PMSH-M12B-05P-MM-SL8C01-00AH	PMSH-M12D-04P-MM-SL8C01-00AH
	3m	PMSH-M12A-10P-MM-SL8C03-00AH	PMSH-M12A-12P-MM-SL8C03-00AH	PMSH-M12A-17P-MM-SL8C03-00AH	PMSH-M12B-05P-MM-SL8C03-00AH	PMSH-M12D-04P-MM-SL8C03-00AH
	5m	PMSH-M12A-10P-MM-SL8C05-00AH	PMSH-M12A-12P-MM-SL8C05-00AH	PMSH-M12A-17P-MM-SL8C05-00AH	PMSH-M12B-05P-MM-SL8C05-00AH	PMSH-M12D-04P-MM-SL8C05-00AH
	Customized					
PUR	1m	PMSH-M12A-10P-MM-SL8D01-00AH	PMSH-M12A-12P-MM-SL8D01-00AH	PMSH-M12A-17P-MM-SL8D01-00AH	PMSH-M12B-05P-MM-SL8D01-00AH	PMSH-M12D-04P-MM-SL8D01-00AH
	3m	PMSH-M12A-10P-MM-SL8D03-00AH	PMSH-M12A-12P-MM-SL8D03-00AH	PMSH-M12A-17P-MM-SL8D03-00AH	PMSH-M12B-05P-MM-SL8D03-00AH	PMSH-M12D-04P-MM-SL8D03-00AH
	5m	PMSH-M12A-10P-MM-SL8D05-00AH	PMSH-M12A-12P-MM-SL8D05-00AH	PMSH-M12A-17P-MM-SL8D05-00AH	PMSH-M12B-05P-MM-SL8D05-00AH	PMSH-M12D-04P-MM-SL8D05-00AH
	Customized					

M12 x 1 Male,Overmolded with Cable Plug,Single end,Shielded,Angled.

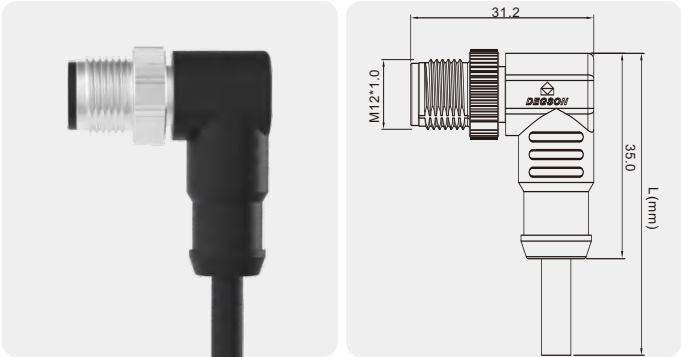


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male,Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ +80°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.WH 2.BN 3.GN 4.YE 6.PK 7.BU 7.BU	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	1m	PMSH-M12A-03P-MM-SR8A01-00AH	PMSH-M12A-04P-MM-SR8A01-00AH	PMSH-M12A-05P-MM-SR8A01-00AH	PMSH-M12A-06P-MM-SR8A01-00AH	PMSH-M12A-08P-MM-SR8A01-00AH
	3m	PMSH-M12A-03P-MM-SR8A03-00AH	PMSH-M12A-04P-MM-SR8A03-00AH	PMSH-M12A-05P-MM-SR8A03-00AH	PMSH-M12A-06P-MM-SR8A03-00AH	PMSH-M12A-08P-MM-SR8A03-00AH
	5m	PMSH-M12A-03P-MM-SR8A05-00AH	PMSH-M12A-04P-MM-SR8A05-00AH	PMSH-M12A-05P-MM-SR8A05-00AH	PMSH-M12A-06P-MM-SR8A05-00AH	PMSH-M12A-08P-MM-SR8A05-00AH
	Customized					
PUR	1m	PMSH-M12A-03P-MM-SR8B01-00AH	PMSH-M12A-04P-MM-SR8B01-00AH	PMSH-M12A-05P-MM-SR8B01-00AH	PMSH-M12A-06P-MM-SR8B01-00AH	PMSH-M12A-08P-MM-SR8B01-00AH
	3m	PMSH-M12A-03P-MM-SR8B03-00AH	PMSH-M12A-04P-MM-SR8B03-00AH	PMSH-M12A-05P-MM-SR8B03-00AH	PMSH-M12A-06P-MM-SR8B03-00AH	PMSH-M12A-08P-MM-SR8B03-00AH
	5m	PMSH-M12A-03P-MM-SR8B05-00AH	PMSH-M12A-04P-MM-SR8B05-00AH	PMSH-M12A-05P-MM-SR8B05-00AH	PMSH-M12A-06P-MM-SR8B05-00AH	PMSH-M12A-08P-MM-SR8B05-00AH
	Customized					
PVC	1m	PMSH-M12A-03P-MM-SR8C01-00AH	PMSH-M12A-04P-MM-SR8C01-00AH	PMSH-M12A-05P-MM-SR8C01-00AH	PMSH-M12A-06P-MM-SR8C01-00AH	PMSH-M12A-08P-MM-SR8C01-00AH
	3m	PMSH-M12A-03P-MM-SR8C03-00AH	PMSH-M12A-04P-MM-SR8C03-00AH	PMSH-M12A-05P-MM-SR8C03-00AH	PMSH-M12A-06P-MM-SR8C03-00AH	PMSH-M12A-08P-MM-SR8C03-00AH
	5m	PMSH-M12A-03P-MM-SR8C05-00AH	PMSH-M12A-04P-MM-SR8C05-00AH	PMSH-M12A-05P-MM-SR8C05-00AH	PMSH-M12A-06P-MM-SR8C05-00AH	PMSH-M12A-08P-MM-SR8C05-00AH
	Customized					
PUR	1m	PMSH-M12A-03P-MM-SR8D01-00AH	PMSH-M12A-04P-MM-SR8D01-00AH	PMSH-M12A-05P-MM-SR8D01-00AH	PMSH-M12A-06P-MM-SR8D01-00AH	PMSH-M12A-08P-MM-SR8D01-00AH
	3m	PMSH-M12A-03P-MM-SR8D03-00AH	PMSH-M12A-04P-MM-SR8D03-00AH	PMSH-M12A-05P-MM-SR8D03-00AH	PMSH-M12A-06P-MM-SR8D03-00AH	PMSH-M12A-08P-MM-SR8D03-00AH
	5m	PMSH-M12A-03P-MM-SR8D05-00AH	PMSH-M12A-04P-MM-SR8D05-00AH	PMSH-M12A-05P-MM-SR8D05-00AH	PMSH-M12A-06P-MM-SR8D05-00AH	PMSH-M12A-08P-MM-SR8D05-00AH
	Customized					

M12 x 1 Male,Overmolded with Cable Plug,Single end,Shielded,Angled.

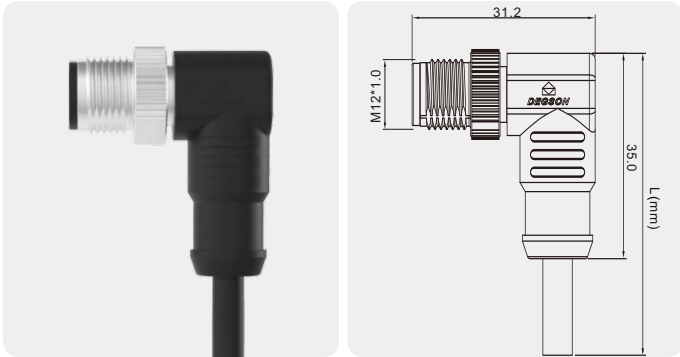

Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male,Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ +80°C	—	—
IP Class	IP68	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
	Wiring list	1.BN 3.WH 5.PK 7.BK 9.RD	2.BU 4.GN 6.YW 8.GY 10.VT	1.BN 3.WH 5.PK 7.BK 9.RD 11.GY/PK 13.WH/GN 15.WH/YW 17.WH/GY	2.BU 4.GN 6.YW 8.GY 10.VT 12.RD/BU 14.BN/GN 16.YW/BN	1.YW 2.WH 3.OG 4.BU
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	1m	PMSH-M12A-10P-MM-SR8A01-00AH	PMSH-M12A-12P-MM-SR8A01-00AH	PMSH-M12A-17P-MM-SR8A01-00AH	PMSH-M12B-05P-MM-SR8A01-00AH	PMSH-M12D-04P-MM-SR8A01-00AH
	3m	PMSH-M12A-10P-MM-SR8A03-00AH	PMSH-M12A-12P-MM-SR8A03-00AH	PMSH-M12A-17P-MM-SR8A03-00AH	PMSH-M12B-05P-MM-SR8A03-00AH	PMSH-M12D-04P-MM-SR8A03-00AH
	5m	PMSH-M12A-10P-MM-SR8A05-00AH	PMSH-M12A-12P-MM-SR8A05-00AH	PMSH-M12A-17P-MM-SR8A05-00AH	PMSH-M12B-05P-MM-SR8A05-00AH	PMSH-M12D-04P-MM-SR8A05-00AH
	Customized					
PUR	1m	PMSH-M12A-10P-MM-SR8B01-00AH	PMSH-M12A-12P-MM-SR8B01-00AH	PMSH-M12A-17P-MM-SR8B01-00AH	PMSH-M12B-05P-MM-SR8B01-00AH	PMSH-M12D-04P-MM-SR8B01-00AH
	3m	PMSH-M12A-10P-MM-SR8B03-00AH	PMSH-M12A-12P-MM-SR8B03-00AH	PMSH-M12A-17P-MM-SR8B03-00AH	PMSH-M12B-05P-MM-SR8B03-00AH	PMSH-M12D-04P-MM-SR8B03-00AH
	5m	PMSH-M12A-10P-MM-SR8B05-00AH	PMSH-M12A-12P-MM-SR8B05-00AH	PMSH-M12A-17P-MM-SR8B05-00AH	PMSH-M12B-05P-MM-SR8B05-00AH	PMSH-M12D-04P-MM-SR8B05-00AH
	Customized					
PVC	1m	PMSH-M12A-10P-MM-SR8C01-00AH	PMSH-M12A-12P-MM-SR8C01-00AH	PMSH-M12A-17P-MM-SR8C01-00AH	PMSH-M12B-05P-MM-SR8C01-00AH	PMSH-M12D-04P-MM-SR8C01-00AH
	3m	PMSH-M12A-10P-MM-SR8C03-00AH	PMSH-M12A-12P-MM-SR8C03-00AH	PMSH-M12A-17P-MM-SR8C03-00AH	PMSH-M12B-05P-MM-SR8C03-00AH	PMSH-M12D-04P-MM-SR8C03-00AH
	5m	PMSH-M12A-10P-MM-SR8C05-00AH	PMSH-M12A-12P-MM-SR8C05-00AH	PMSH-M12A-17P-MM-SR8C05-00AH	PMSH-M12B-05P-MM-SR8C05-00AH	PMSH-M12D-04P-MM-SR8C05-00AH
	Customized					
PUR	1m	PMSH-M12A-10P-MM-SR8D01-00AH	PMSH-M12A-12P-MM-SR8D01-00AH	PMSH-M12A-17P-MM-SR8D01-00AH	PMSH-M12B-05P-MM-SR8D01-00AH	PMSH-M12D-04P-MM-SR8D01-00AH
	3m	PMSH-M12A-10P-MM-SR8D03-00AH	PMSH-M12A-12P-MM-SR8D03-00AH	PMSH-M12A-17P-MM-SR8D03-00AH	PMSH-M12B-05P-MM-SR8D03-00AH	PMSH-M12D-04P-MM-SR8D03-00AH
	5m	PMSH-M12A-10P-MM-SR8D05-00AH	PMSH-M12A-12P-MM-SR8D05-00AH	PMSH-M12A-17P-MM-SR8D05-00AH	PMSH-M12B-05P-MM-SR8D05-00AH	PMSH-M12D-04P-MM-SR8D05-00AH
	Customized					

M12 x 1 Female Overmolded with Cable Plug, Single end, Unshielded, Straight.




Technical Data

Standard	IEC 61076	Contact carriers material	PU / PA
Series	M12, Female, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80°C	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm ²	0.34mm ²	0.34mm ²	0.25mm ²	0.25mm ²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.GN 4.YE 5.GY	1.WH 2.BN 3.GN 4.YE 6.PK 7.BU	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	Metal of nut	1m	PM-M12A-03P-FF-SL8A01-00AH	PM-M12A-04P-FF-SL8A01-00AH	PM-M12A-05P-FF-SL8A01-00AH	PM-M12A-06P-FF-SL8A01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-03P-FF-SL8C01-00AH	PP-M12A-04P-FF-SL8C01-00AH	PP-M12A-05P-FF-SL8C01-00AH	PP-M12A-06P-FF-SL8C01-00AH
		Customized				
PUR	Metal of nut	1m	PM-M12A-03P-FF-SL8B01-00AH	PM-M12A-04P-FF-SL8B01-00AH	PM-M12A-05P-FF-SL8B01-00AH	PM-M12A-06P-FF-SL8B01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-03P-FF-SL8D01-00AH	PP-M12A-04P-FF-SL8D01-00AH	PP-M12A-05P-FF-SL8D01-00AH	PP-M12A-06P-FF-SL8D01-00AH
		Customized				
	PVC	1m	PM-M12A-03P-FF-SL8C01-00AH	PM-M12A-04P-FF-SL8C01-00AH	PM-M12A-05P-FF-SL8C01-00AH	PM-M12A-06P-FF-SL8C01-00AH
		3m	PM-M12A-03P-FF-SL8C03-00AH	PM-M12A-04P-FF-SL8C03-00AH	PM-M12A-05P-FF-SL8C03-00AH	PM-M12A-06P-FF-SL8C03-00AH
		5m	PM-M12A-03P-FF-SL8C05-00AH	PM-M12A-04P-FF-SL8C05-00AH	PM-M12A-05P-FF-SL8C05-00AH	PM-M12A-06P-FF-SL8C05-00AH
		Customized				
	PUR	1m	PM-M12A-03P-FF-SL8D01-00AH	PM-M12A-04P-FF-SL8D01-00AH	PM-M12A-05P-FF-SL8D01-00AH	PM-M12A-06P-FF-SL8D01-00AH
		3m	PM-M12A-03P-FF-SL8D03-00AH	PM-M12A-04P-FF-SL8D03-00AH	PM-M12A-05P-FF-SL8D03-00AH	PM-M12A-06P-FF-SL8D03-00AH
		5m	PM-M12A-03P-FF-SL8D05-00AH	PM-M12A-04P-FF-SL8D05-00AH	PM-M12A-05P-FF-SL8D05-00AH	PM-M12A-06P-FF-SL8D05-00AH
		Customized				

M12 x 1 Female Overmolded with Cable Plug, Single end, Unshielded, Straight.

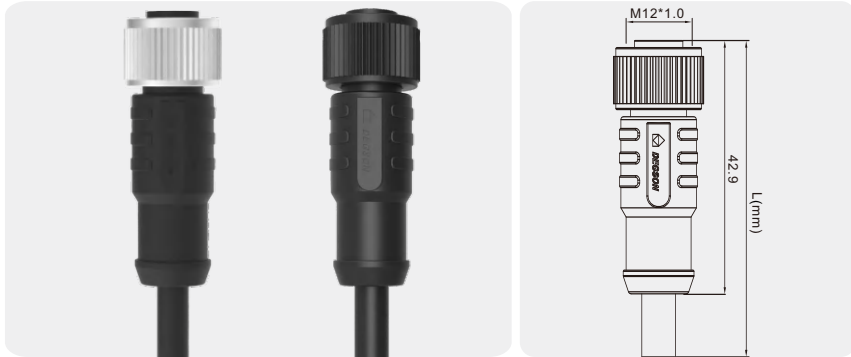


Technical Data

Standard	IEC 61076	Contact carriers material	PU / PA
Series	M12, Female, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80°C	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm ²	0.14mm ²	0.14mm ²	0.34mm ²	0.34mm ²
	Wiring list	1.BN 3.WH 5.PK 7.BK 9.RD 2.BU 4.GN 6.YW 8.GY 10.VT	1.BN 3.WH 5.PK 7.BK 9.RD 2.BU 4.GN 6.YW 8.GY 10.VT 11.GY/PK 12.RD/BU	1.BN 3.WH 5.PK 7.BK 9.RD 2.BU 4.GN 6.YW 8.GY 10.VT 11.GY/PK 12.RD/BU 13.WH/GN 15.WH/YW 17.WH/GY	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	Metal of nut	1m	PM-M12A-10P-FF-SL8A01-00AH	PM-M12A-12P-FF-SL8A01-00AH	PM-M12A-17P-FF-SL8A01-00AH	PM-M12D-04P-FF-SL8A01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-10P-FF-SL8C01-00AH	PP-M12A-12P-FF-SL8C01-00AH	PP-M12A-17P-FF-SL8C01-00AH	PP-M12D-04P-FF-SL8C01-00AH
		Customized				
PUR	Metal of nut	1m	PM-M12A-10P-FF-SL8B01-00AH	PM-M12A-12P-FF-SL8B01-00AH	PM-M12A-17P-FF-SL8B01-00AH	PM-M12D-04P-FF-SL8B01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-10P-FF-SL8D01-00AH	PP-M12A-12P-FF-SL8D01-00AH	PP-M12A-17P-FF-SL8D01-00AH	PP-M12D-04P-FF-SL8D01-00AH
		Customized				
	PVC	1m	PM-M12A-10P-FF-SL8C01-00AH	PM-M12A-12P-FF-SL8C01-00AH	PM-M12A-17P-FF-SL8C01-00AH	PM-M12B-05P-FF-SL8C01-00AH
		3m	PM-M12A-10P-FF-SL8C03-00AH	PM-M12A-12P-FF-SL8C03-00AH	PM-M12A-17P-FF-SL8C03-00AH	PM-M12B-05P-FF-SL8C03-00AH
		5m	PM-M12A-10P-FF-SL8C05-00AH	PM-M12A-12P-FF-SL8C05-00AH	PM-M12A-17P-FF-SL8C05-00AH	PM-M12B-05P-FF-SL8C05-00AH
		Customized				
	PUR	1m	PM-M12A-10P-FF-SL8D01-00AH	PM-M12A-12P-FF-SL8D01-00AH	PM-M12A-17P-FF-SL8D01-00AH	PM-M12B-05P-FF-SL8D01-00AH
		3m	PM-M12A-10P-FF-SL8D03-00AH	PM-M12A-12P-FF-SL8D03-00AH	PM-M12A-17P-FF-SL8D03-00AH	PM-M12B-05P-FF-SL8D03-00AH
		5m	PM-M12A-10P-FF-SL8D05-00AH	PM-M12A-12P-FF-SL8D05-00AH	PM-M12A-17P-FF-SL8D05-00AH	PM-M12B-05P-FF-SL8D05-00AH
		Customized				

M12 x 1 Female Overmolded
with Cable Plug, Single
end, Unshielded, Angled.

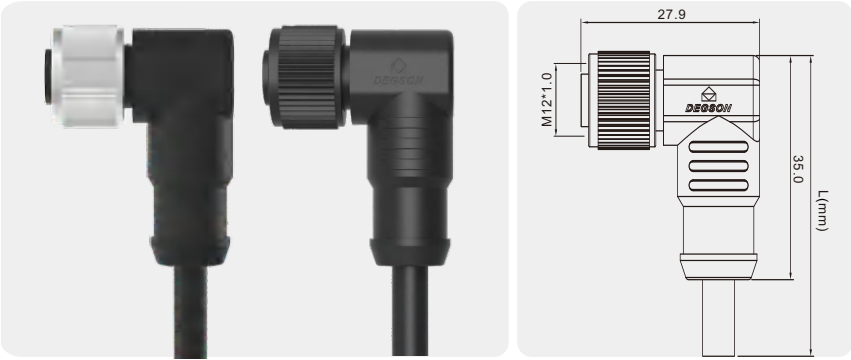


Technical Data

Standard	IEC 61076	Contact carriers material	PU / PA
Series	M12, Female, Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80°C	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm ²	0.34mm ²	0.34mm ²	0.25mm ²	0.25mm ²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	Metal of nut	1m	PM-M12A-03P-FF-SR8A01-00AH	PM-M12A-04P-FF-SR8A01-00AH	PM-M12A-05P-FF-SR8A01-00AH	PM-M12A-06P-FF-SR8A01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-03P-FF-SR8C01-00AH	PP-M12A-04P-FF-SR8C01-00AH	PP-M12A-05P-FF-SR8C01-00AH	PP-M12A-06P-FF-SR8C01-00AH
		Customized				
PUR	Metal of nut	1m	PM-M12A-03P-FF-SR8B01-00AH	PM-M12A-04P-FF-SR8B01-00AH	PM-M12A-05P-FF-SR8B01-00AH	PM-M12A-06P-FF-SR8B01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-03P-FF-SR8D01-00AH	PP-M12A-04P-FF-SR8D01-00AH	PP-M12A-05P-FF-SR8D01-00AH	PP-M12A-06P-FF-SR8D01-00AH
		Customized				
UL	PVC	1m	PM-M12A-03P-FF-SR8C01-00AH	PM-M12A-04P-FF-SR8C01-00AH	PM-M12A-05P-FF-SR8C01-00AH	PM-M12A-06P-FF-SR8C01-00AH
		3m	PM-M12A-03P-FF-SR8C03-00AH	PM-M12A-04P-FF-SR8C03-00AH	PM-M12A-05P-FF-SR8C03-00AH	PM-M12A-06P-FF-SR8C03-00AH
		5m	PM-M12A-03P-FF-SR8C05-00AH	PM-M12A-04P-FF-SR8C05-00AH	PM-M12A-05P-FF-SR8C05-00AH	PM-M12A-06P-FF-SR8C05-00AH
		Customized				
UL	PUR	1m	PM-M12A-03P-FF-SR8D01-00AH	PM-M12A-04P-FF-SR8D01-00AH	PM-M12A-05P-FF-SR8D01-00AH	PM-M12A-06P-FF-SR8D01-00AH
		3m	PM-M12A-03P-FF-SR8D03-00AH	PM-M12A-04P-FF-SR8D03-00AH	PM-M12A-05P-FF-SR8D03-00AH	PM-M12A-06P-FF-SR8D03-00AH
		5m	PM-M12A-03P-FF-SR8D05-00AH	PM-M12A-04P-FF-SR8D05-00AH	PM-M12A-05P-FF-SR8D05-00AH	PM-M12A-06P-FF-SR8D05-00AH
		Customized				

M12 x 1 Female Overmolded
with Cable Plug, Single
end, Unshielded, Angled.

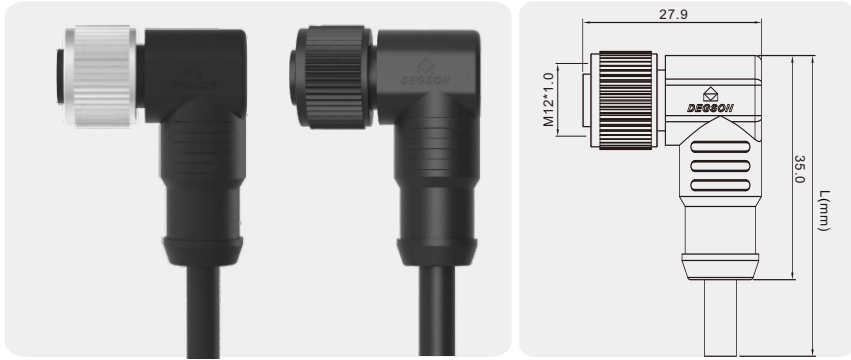


Technical Data

Standard	IEC 61076	Contact carriers material	PU / PA
Series	M12, Female, Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80°C	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm ²	0.14mm ²	0.14mm ²	0.34mm ²	0.34mm ²
	Wiring list	1.BN 3.WH 5.PK 7.BK 9.RD 2.BU 4.GN 6.YW 8.GY 10.VT	1.BN 2.BU 4.GN 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU	1.BN 3.WH 5.PK 7.BK 9.RD 2.BU 4.GN 6.YW 8.GY 10.VT 11.GY/PK 12.RD/BU 13.WH/GN 15.WH/YW 17.WH/GY	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	Metal of nut	1m	PM-M12A-10P-FF-SR8A01-00AH	PM-M12A-12P-FF-SR8A01-00AH	PM-M12A-17P-FF-SR8A01-00AH	PM-M12B-05P-FF-SR8A01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-10P-FF-SR8C01-00AH	PP-M12A-12P-FF-SR8C01-00AH	PP-M12A-17P-FF-SR8C01-00AH	PP-M12B-05P-FF-SR8C01-00AH
		Customized				
PUR	Metal of nut	1m	PM-M12A-10P-FF-SR8B01-00AH	PM-M12A-12P-FF-SR8B01-00AH	PM-M12A-17P-FF-SR8B01-00AH	PM-M12B-05P-FF-SR8B01-00AH
		Customized				
	Plastic of nut	1m	PP-M12A-10P-FF-SR8D01-00AH	PP-M12A-12P-FF-SR8D01-00AH	PP-M12A-17P-FF-SR8D01-00AH	PP-M12B-05P-FF-SR8D01-00AH
		Customized				
UL	PVC	1m	PM-M12A-10P-FF-SR8C01-00AH	PM-M12A-12P-FF-SR8C01-00AH	PM-M12A-17P-FF-SR8C01-00AH	PM-M12B-05P-FF-SR8C01-00AH
		3m	PM-M12A-10P-FF-SR8C03-00AH	PM-M12A-12P-FF-SR8C03-00AH	PM-M12A-17P-FF-SR8C03-00AH	PM-M12B-05P-FF-SR8C03-00AH
		5m	PM-M12A-10P-FF-SR8C05-00AH	PM-M12A-12P-FF-SR8C05-00AH	PM-M12A-17P-FF-SR8C05-00AH	PM-M12B-05P-FF-SR8C05-00AH
		Customized				
UL	PUR	1m	PM-M12A-10P-FF-SR8D01-00AH	PM-M12A-12P-FF-SR8D01-00AH	PM-M12A-17P-FF-SR8D01-00AH	PM-M12B-05P-FF-SR8D01-00AH
		3m	PM-M12A-10P-FF-SR8D03-00AH	PM-M12A-12P-FF-SR8D03-00AH	PM-M12A-17P-FF-SR8D03-00AH	PM-M12B-05P-FF-SR8D03-00AH
		5m	PM-M12A-10P-FF-SR8D05-00AH	PM-M12A-12P-FF-SR8D05-00AH	PM-M12A-17P-FF-SR8D05-00AH	PM-M12B-05P-FF-SR8D05-00AH
		Customized				

M12 x 1 Female Overmolded with Cable Plug, Single end, Shielded, Straight.

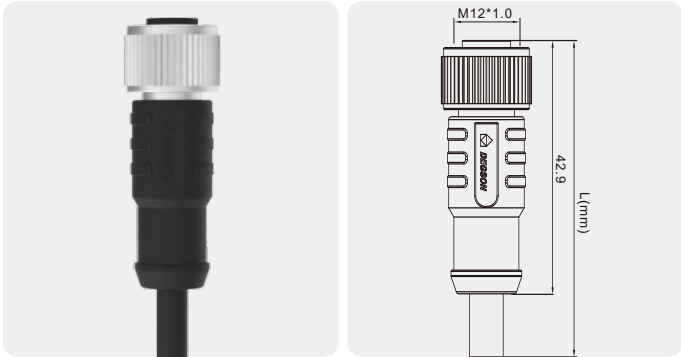


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.WH 2.BN 3.GN 4.YE 6.PK 7.BU	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	1m	PMSH-M12A-03P-FF-SL8A01-00AH	PMSH-M12A-04P-FF-SL8A01-00AH	PMSH-M12A-05P-FF-SL8A01-00AH	PMSH-M12A-06P-FF-SL8A01-00AH	PMSH-M12A-08P-FF-SL8A01-00AH
	3m	PMSH-M12A-03P-FF-SL8A03-00AH	PMSH-M12A-04P-FF-SL8A03-00AH	PMSH-M12A-05P-FF-SL8A03-00AH	PMSH-M12A-06P-FF-SL8A03-00AH	PMSH-M12A-08P-FF-SL8A03-00AH
	5m	PMSH-M12A-03P-FF-SL8A05-00AH	PMSH-M12A-04P-FF-SL8A05-00AH	PMSH-M12A-05P-FF-SL8A05-00AH	PMSH-M12A-06P-FF-SL8A05-00AH	PMSH-M12A-08P-FF-SL8A05-00AH
	Customized					
PUR	1m	PMSH-M12A-03P-FF-SL8B01-00AH	PMSH-M12A-04P-FF-SL8B01-00AH	PMSH-M12A-05P-FF-SL8B01-00AH	PMSH-M12A-06P-FF-SL8B01-00AH	PMSH-M12A-08P-FF-SL8B01-00AH
	3m	PMSH-M12A-03P-FF-SL8B03-00AH	PMSH-M12A-04P-FF-SL8B03-00AH	PMSH-M12A-05P-FF-SL8B03-00AH	PMSH-M12A-06P-FF-SL8B03-00AH	PMSH-M12A-08P-FF-SL8B03-00AH
	5m	PMSH-M12A-03P-FF-SL8B05-00AH	PMSH-M12A-04P-FF-SL8B05-00AH	PMSH-M12A-05P-FF-SL8B05-00AH	PMSH-M12A-06P-FF-SL8B05-00AH	PMSH-M12A-08P-FF-SL8B05-00AH
	Customized					
PVC	1m	PMSH-M12A-03P-FF-SL8C01-00AH	PMSH-M12A-04P-FF-SL8C01-00AH	PMSH-M12A-05P-FF-SL8C01-00AH	PMSH-M12A-06P-FF-SL8C01-00AH	PMSH-M12A-08P-FF-SL8C01-00AH
	3m	PMSH-M12A-03P-FF-SL8C03-00AH	PMSH-M12A-04P-FF-SL8C03-00AH	PMSH-M12A-05P-FF-SL8C03-00AH	PMSH-M12A-06P-FF-SL8C03-00AH	PMSH-M12A-08P-FF-SL8C03-00AH
	5m	PMSH-M12A-03P-FF-SL8C05-00AH	PMSH-M12A-04P-FF-SL8C05-00AH	PMSH-M12A-05P-FF-SL8C05-00AH	PMSH-M12A-06P-FF-SL8C05-00AH	PMSH-M12A-08P-FF-SL8C05-00AH
	Customized					
PUR	1m	PMSH-M12A-03P-FF-SL8D01-00AH	PMSH-M12A-04P-FF-SL8D01-00AH	PMSH-M12A-05P-FF-SL8D01-00AH	PMSH-M12A-06P-FF-SL8D01-00AH	PMSH-M12A-08P-FF-SL8D01-00AH
	3m	PMSH-M12A-03P-FF-SL8D03-00AH	PMSH-M12A-04P-FF-SL8D03-00AH	PMSH-M12A-05P-FF-SL8D03-00AH	PMSH-M12A-06P-FF-SL8D03-00AH	PMSH-M12A-08P-FF-SL8D03-00AH
	5m	PMSH-M12A-03P-FF-SL8D05-00AH	PMSH-M12A-04P-FF-SL8D05-00AH	PMSH-M12A-05P-FF-SL8D05-00AH	PMSH-M12A-06P-FF-SL8D05-00AH	PMSH-M12A-08P-FF-SL8D05-00AH
	Customized					

M12 x 1 Female Overmolded with Cable Plug, Single end, Shielded, Straight.

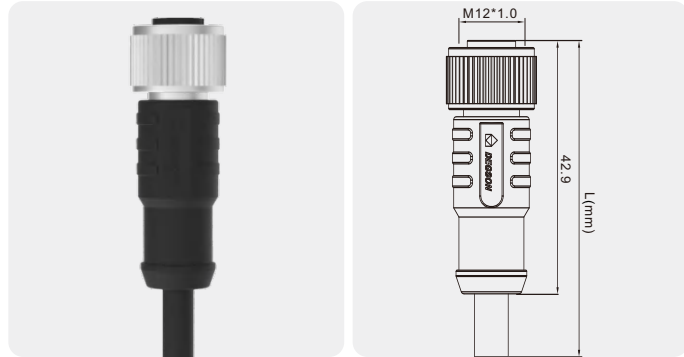


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
	Wiring list	1.BN 3.WH 5.PK 7.BK 9.RD	2.BU 4.GN 6.YW 8.GY 10.VT	1.BN 3.WH 5.PK 7.BK 9.RD 11.GY/13.WH/15.WH/17.WH/GY 2.BU 4.GN 6.YW 8.GY 10.VT 12.RD/14.BN/16.YW/18.BN	1.BN 2.WH 3.BU 4.BK 5.GY	1.YW 2.WH 3.0G 4.BU
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	1m	PMSH-M12A-10P-FF-SL8A01-00AH	PMSH-M12A-12P-FF-SL8A01-00AH	PMSH-M12A-17P-FF-SL8A01-00AH	PMSH-M12B-05P-FF-SL8A01-00AH	PMSH-M12D-04P-FF-SL8A01-00AH
	3m	PMSH-M12A-10P-FF-SL8A03-00AH	PMSH-M12A-12P-FF-SL8A03-00AH	PMSH-M12A-17P-FF-SL8A03-00AH	PMSH-M12B-05P-FF-SL8A03-00AH	PMSH-M12D-04P-FF-SL8A03-00AH
	5m	PMSH-M12A-10P-FF-SL8A05-00AH	PMSH-M12A-12P-FF-SL8A05-00AH	PMSH-M12A-17P-FF-SL8A05-00AH	PMSH-M12B-05P-FF-SL8A05-00AH	PMSH-M12D-04P-FF-SL8A05-00AH
	Customized					
PUR	1m	PMSH-M12A-10P-FF-SL8B01-00AH	PMSH-M12A-12P-FF-SL8B01-00AH	PMSH-M12A-17P-FF-SL8B01-00AH	PMSH-M12B-05P-FF-SL8B01-00AH	PMSH-M12D-04P-FF-SL8B01-00AH
	3m	PMSH-M12A-10P-FF-SL8B03-00AH	PMSH-M12A-12P-FF-SL8B03-00AH	PMSH-M12A-17P-FF-SL8B03-00AH	PMSH-M12B-05P-FF-SL8B03-00AH	PMSH-M12D-04P-FF-SL8B03-00AH
	5m	PMSH-M12A-10P-FF-SL8B05-00AH	PMSH-M12A-12P-FF-SL8B05-00AH	PMSH-M12A-17P-FF-SL8B05-00AH	PMSH-M12B-05P-FF-SL8B05-00AH	PMSH-M12D-04P-FF-SL8B05-00AH
	Customized					
PVC	1m	PMSH-M12A-10P-FF-SL8C01-00AH	PMSH-M12A-12P-FF-SL8C01-00AH	PMSH-M12A-17P-FF-SL8C01-00AH	PMSH-M12B-05P-FF-SL8C01-00AH	PMSH-M12D-04P-FF-SL8C01-00AH
	3m	PMSH-M12A-10P-FF-SL8C03-00AH	PMSH-M12A-12P-FF-SL8C03-00AH	PMSH-M12A-17P-FF-SL8C03-00AH	PMSH-M12B-05P-FF-SL8C03-00AH	PMSH-M12D-04P-FF-SL8C03-00AH
	5m	PMSH-M12A-10P-FF-SL8C05-00AH	PMSH-M12A-12P-FF-SL8C05-00AH	PMSH-M12A-17P-FF-SL8C05-00AH	PMSH-M12B-05P-FF-SL8C05-00AH	PMSH-M12D-04P-FF-SL8C05-00AH
	Customized					
PUR	1m	PMSH-M12A-10P-FF-SL8D01-00AH	PMSH-M12A-12P-FF-SL8D01-00AH	PMSH-M12A-17P-FF-SL8D01-00AH	PMSH-M12B-05P-FF-SL8D01-00AH	PMSH-M12D-04P-FF-SL8D01-00AH
	3m	PMSH-M12A-10P-FF-SL8D03-00AH	PMSH-M12A-12P-FF-SL8D03-00AH	PMSH-M12A-17P-FF-SL8D03-00AH	PMSH-M12B-05P-FF-SL8D03-00AH	PMSH-M12D-04P-FF-SL8D03-00AH
	5m	PMSH-M12A-10P-FF-SL8D05-00AH	PMSH-M12A-12P-FF-SL8D05-00AH	PMSH-M12A-17P-FF-SL8D05-00AH	PMSH-M12B-05P-FF-SL8D05-00AH	PMSH-M12D-04P-FF-SL8D05-00AH
	Customized					

M12 x 1 Female Overmolded with Cable Plug, Single end, Shielded, Angled.

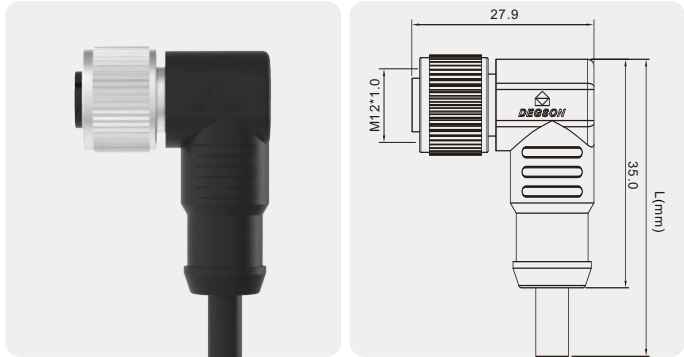


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female, Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
	Wiring list	1.BN 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.WH 2.BN 3.GN 4.YE 6.PK 7.BU	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	1m	PMSH-M12A-03P-FF-SR8A01-00AH	PMSH-M12A-04P-FF-SR8A01-00AH	PMSH-M12A-05P-FF-SR8A01-00AH	PMSH-M12A-06P-FF-SR8A01-00AH	PMSH-M12A-08P-FF-SR8A01-00AH
	3m	PMSH-M12A-03P-FF-SR8A03-00AH	PMSH-M12A-04P-FF-SR8A03-00AH	PMSH-M12A-05P-FF-SR8A03-00AH	PMSH-M12A-06P-FF-SR8A03-00AH	PMSH-M12A-08P-FF-SR8A03-00AH
	5m	PMSH-M12A-03P-FF-SR8A05-00AH	PMSH-M12A-04P-FF-SR8A05-00AH	PMSH-M12A-05P-FF-SR8A05-00AH	PMSH-M12A-06P-FF-SR8A05-00AH	PMSH-M12A-08P-FF-SR8A05-00AH
	Customized					
PUR	1m	PMSH-M12A-03P-FF-SR8B01-00AH	PMSH-M12A-04P-FF-SR8B01-00AH	PMSH-M12A-05P-FF-SR8B01-00AH	PMSH-M12A-06P-FF-SR8B01-00AH	PMSH-M12A-08P-FF-SR8B01-00AH
	3m	PMSH-M12A-03P-FF-SR8B03-00AH	PMSH-M12A-04P-FF-SR8B03-00AH	PMSH-M12A-05P-FF-SR8B03-00AH	PMSH-M12A-06P-FF-SR8B03-00AH	PMSH-M12A-08P-FF-SR8B03-00AH
	5m	PMSH-M12A-03P-FF-SR8B05-00AH	PMSH-M12A-04P-FF-SR8B05-00AH	PMSH-M12A-05P-FF-SR8B05-00AH	PMSH-M12A-06P-FF-SR8B05-00AH	PMSH-M12A-08P-FF-SR8B05-00AH
	Customized					
PVC	1m	PMSH-M12A-03P-FF-SR8C01-00AH	PMSH-M12A-04P-FF-SR8C01-00AH	PMSH-M12A-05P-FF-SR8C01-00AH	PMSH-M12A-06P-FF-SR8C01-00AH	PMSH-M12A-08P-FF-SR8C01-00AH
	3m	PMSH-M12A-03P-FF-SR8C03-00AH	PMSH-M12A-04P-FF-SR8C03-00AH	PMSH-M12A-05P-FF-SR8C03-00AH	PMSH-M12A-06P-FF-SR8C03-00AH	PMSH-M12A-08P-FF-SR8C03-00AH
	5m	PMSH-M12A-03P-FF-SR8C05-00AH	PMSH-M12A-04P-FF-SR8C05-00AH	PMSH-M12A-05P-FF-SR8C05-00AH	PMSH-M12A-06P-FF-SR8C05-00AH	PMSH-M12A-08P-FF-SR8C05-00AH
	Customized					
PUR	1m	PMSH-M12A-03P-FF-SR8D01-00AH	PMSH-M12A-04P-FF-SR8D01-00AH	PMSH-M12A-05P-FF-SR8D01-00AH	PMSH-M12A-06P-FF-SR8D01-00AH	PMSH-M12A-08P-FF-SR8D01-00AH
	3m	PMSH-M12A-03P-FF-SR8D03-00AH	PMSH-M12A-04P-FF-SR8D03-00AH	PMSH-M12A-05P-FF-SR8D03-00AH	PMSH-M12A-06P-FF-SR8D03-00AH	PMSH-M12A-08P-FF-SR8D03-00AH
	5m	PMSH-M12A-03P-FF-SR8D05-00AH	PMSH-M12A-04P-FF-SR8D05-00AH	PMSH-M12A-05P-FF-SR8D05-00AH	PMSH-M12A-06P-FF-SR8D05-00AH	PMSH-M12A-08P-FF-SR8D05-00AH
	Customized					

M12 x 1 Female Overmolded with Cable Plug, Single end, Shielded, Angled.

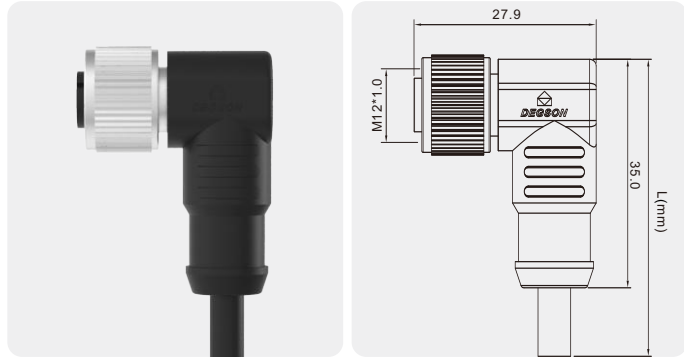


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female, Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
	Wiring list	1.BN 3.WH 5.PK 7.BK 9.RD	2.BU 4.GN 6.YW 8.GY 10.VT	1.BN 3.WH 5.PK 7.BK 9.RD 11.GY/PK 13.WH/GN 15.WH/YW 17.WH/GY	2.BU 4.GN 6.YW 8.GY 10.VT 12.RD/BU 14.BN/GN 16.YW/BN	1.YW 2.WH 3.OG 4.BU
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PVC	1m	PMSH-M12A-10P-FF-SR8A01-00AH	PMSH-M12A-12P-FF-SR8A01-00AH	PMSH-M12A-17P-FF-SR8A01-00AH	PMSH-M12B-05P-FF-SR8A01-00AH	PMSH-M12D-04P-FF-SR8A01-00AH
	3m	PMSH-M12A-10P-FF-SR8A03-00AH	PMSH-M12A-12P-FF-SR8A03-00AH	PMSH-M12A-17P-FF-SR8A03-00AH	PMSH-M12B-05P-FF-SR8A03-00AH	PMSH-M12D-04P-FF-SR8A03-00AH
	5m	PMSH-M12A-10P-FF-SR8A05-00AH	PMSH-M12A-12P-FF-SR8A05-00AH	PMSH-M12A-17P-FF-SR8A05-00AH	PMSH-M12B-05P-FF-SR8A05-00AH	PMSH-M12D-04P-FF-SR8A05-00AH
	Customized					
PUR	1m	PMSH-M12A-10P-FF-SR8B01-00AH	PMSH-M12A-12P-FF-SR8B01-00AH	PMSH-M12A-17P-FF-SR8B01-00AH	PMSH-M12B-05P-FF-SR8B01-00AH	PMSH-M12D-04P-FF-SR8B01-00AH
	3m	PMSH-M12A-10P-FF-SR8B03-00AH	PMSH-M12A-12P-FF-SR8B03-00AH	PMSH-M12A-17P-FF-SR8B03-00AH	PMSH-M12B-05P-FF-SR8B03-00AH	PMSH-M12D-04P-FF-SR8B03-00AH
	5m	PMSH-M12A-10P-FF-SR8B05-00AH	PMSH-M12A-12P-FF-SR8B05-00AH	PMSH-M12A-17P-FF-SR8B05-00AH	PMSH-M12B-05P-FF-SR8B05-00AH	PMSH-M12D-04P-FF-SR8B05-00AH
	Customized					
PVC	1m	PMSH-M12A-10P-FF-SR8C01-00AH	PMSH-M12A-12P-FF-SR8C01-00AH	PMSH-M12A-17P-FF-SR8C01-00AH	PMSH-M12B-05P-FF-SR8C01-00AH	PMSH-M12D-04P-FF-SR8C01-00AH
	3m	PMSH-M12A-10P-FF-SR8C03-00AH	PMSH-M12A-12P-FF-SR8C03-00AH	PMSH-M12A-17P-FF-SR8C03-00AH	PMSH-M12B-05P-FF-SR8C03-00AH	PMSH-M12D-04P-FF-SR8C03-00AH
	5m	PMSH-M12A-10P-FF-SR8C05-00AH	PMSH-M12A-12P-FF-SR8C05-00AH	PMSH-M12A-17P-FF-SR8C05-00AH	PMSH-M12B-05P-FF-SR8C05-00AH	PMSH-M12D-04P-FF-SR8C05-00AH
	Customized					
PUR	1m	PMSH-M12A-10P-FF-SR8D01-00AH	PMSH-M12A-12P-FF-SR8D01-00AH	PMSH-M12A-17P-FF-SR8D01-00AH	PMSH-M12B-05P-FF-SR8D01-00AH	PMSH-M12D-04P-FF-SR8D01-00AH
	3m	PMSH-M12A-10P-FF-SR8D03-00AH	PMSH-M12A-12P-FF-SR8D03-00AH	PMSH-M12A-17P-FF-SR8D03-00AH	PMSH-M12B-05P-FF-SR8D03-00AH	PMSH-M12D-04P-FF-SR8D03-00AH
	5m	PMSH-M12A-10P-FF-SR8D05-00AH	PMSH-M12A-12P-FF-SR8D05-00AH	PMSH-M12A-17P-FF-SR8D05-00AH	PMSH-M12B-05P-FF-SR8D05-00AH	PMSH-M12D-04P-FF-SR8D05-00AH
	Customized					

M12 x 1 Male Overmolded with Cable Plug,Single end,Unshielded,Straight.

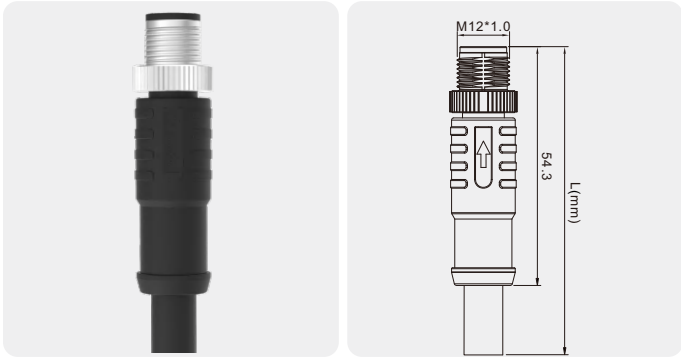


Technical Data

Standard	IEC 61076	Contact carriers material	PU
Series	M12, Male, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	12A max.	Seal	Silicone
Rated voltage	630V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin		04 Pin	
Coding	Coded	S-Coded	T-Coded	S-Coded	T-Coded
	Front View				
Rated current	A.	12A	12A	12A	12A
Rated voltage	V.	630V	63V	630V	63V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG	16AWG
	Cross section	1.5mm²	1.5mm²	1.5mm²	1.5mm²
	Wiring list	1.BK1 3.BK3 4.YE/GN	1.BN 3.BU 4.BK	1.BK1 2.BK2 3.BK3 4.YE/GN	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .	Order NO .	Order NO .
PVC	1m	PM-M12S-03P-MM-SL8A01-00AH	PM-M12T-03P-MM-SL8A01-00AH	PM-M12S-04P-MM-SL8A01-00AH	PM-M12T-04P-MM-SL8A01-00AH
	3m	PM-M12S-03P-MM-SL8A03-00AH	PM-M12T-03P-MM-SL8A03-00AH	PM-M12S-04P-MM-SL8A03-00AH	PM-M12T-04P-MM-SL8A03-00AH
	5m	PM-M12S-03P-MM-SL8A05-00AH	PM-M12T-03P-MM-SL8A05-00AH	PM-M12S-04P-MM-SL8A05-00AH	PM-M12T-04P-MM-SL8A05-00AH
	Customized				
PUR	1m	PM-M12S-03P-MM-SL8B01-00AH	PM-M12T-03P-MM-SL8B01-00AH	PM-M12S-04P-MM-SL8B01-00AH	PM-M12T-04P-MM-SL8B01-00AH
	3m	PM-M12S-03P-MM-SL8B03-00AH	PM-M12T-03P-MM-SL8B03-00AH	PM-M12S-04P-MM-SL8B03-00AH	PM-M12T-04P-MM-SL8B03-00AH
	5m	PM-M12S-03P-MM-SL8B05-00AH	PM-M12T-03P-MM-SL8B05-00AH	PM-M12S-04P-MM-SL8B05-00AH	PM-M12T-04P-MM-SL8B05-00AH
	Customized				

M12 x 1 Male Overmolded with Cable Plug,Single end,Unshielded,Angled.

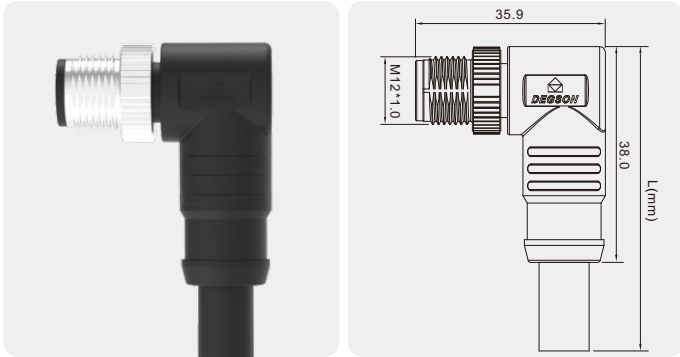


Technical Data

Standard	IEC 61076	Contact carriers material	PU
Series	M12, Male, Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	12A max.	Seal	Silicone
Rated voltage	630V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin		04 Pin	
Coding	Coded	S-Coded	T-Coded	S-Coded	T-Coded
	Front View				
Rated current	A.	12A	12A	12A	12A
Rated voltage	V.	630V	63V	630V	63V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG	16AWG
	Cross section	1.5mm²	1.5mm²	1.5mm²	1.5mm²
	Wiring list	1.BK1 3.BK3 4.YE/GN	1.BN 3.BU 4.BK	1.BK1 2.BK2 3.BK3 4.YE/GN	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .	Order NO .	Order NO .
PVC	1m	PM-M12S-03P-MM-SR8A01-00AH	PM-M12T-03P-MM-SR8A01-00AH	PM-M12S-04P-MM-SR8A01-00AH	PM-M12T-04P-MM-SR8A01-00AH
	3m	PM-M12S-03P-MM-SR8A03-00AH	PM-M12T-03P-MM-SR8A03-00AH	PM-M12S-04P-MM-SR8A03-00AH	PM-M12T-04P-MM-SR8A03-00AH
	5m	PM-M12S-03P-MM-SR8A05-00AH	PM-M12T-03P-MM-SR8A05-00AH	PM-M12S-04P-MM-SR8A05-00AH	PM-M12T-04P-MM-SR8A05-00AH
	Customized				
PUR	1m	PM-M12S-03P-MM-SR8B01-00AH	PM-M12T-03P-MM-SR8B01-00AH	PM-M12S-04P-MM-SR8B01-00AH	PM-M12T-04P-MM-SR8B01-00AH
	3m	PM-M12S-03P-MM-SR8B03-00AH	PM-M12T-03P-MM-SR8B03-00AH	PM-M12S-04P-MM-SR8B03-00AH	PM-M12T-04P-MM-SR8B03-00AH
	5m	PM-M12S-03P-MM-SR8B05-00AH	PM-M12T-03P-MM-SR8B05-00AH	PM-M12S-04P-MM-SR8B05-00AH	PM-M12T-04P-MM-SR8B05-00AH
	Customized				

M12 x 1 Female Overmolded with Cable Plug,Single end,Unshielded,Straight.

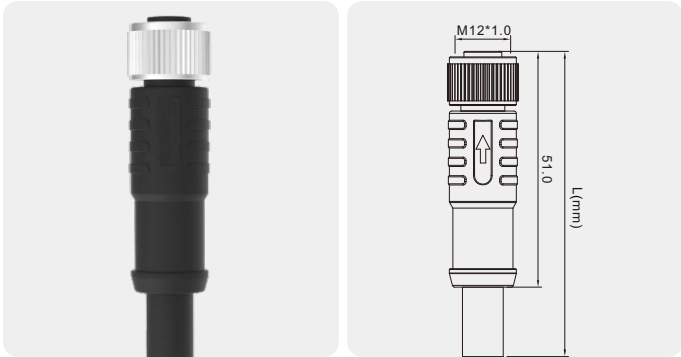


Technical Data

Standard	IEC 61076	Contact carriers material	PU
Series	M12, Female, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	12A max.	Seal	Silicone
Rated voltage	630V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ +80°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin		04 Pin	
Coding	Coded	S-Coded	T-Coded	S-Coded	T-Coded
	Front View				
Rated current	A.	12A	12A	12A	12A
Rated voltage	V.	630V	63V	630V	63V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG	16AWG
	Cross section	1.5mm²	1.5mm²	1.5mm²	1.5mm²
	Wiring list	1.BK1 3.BK3 4.YE/GN	1.BN 3.BU 4.BK	1.BK1 2.BK2 3.BK3 4.YE/GN	1.BN 2.WH 3.BU 4.BK
Description		Order NO .		Order NO .	
PVC	1m	PM-M12S-03P-FF-SL8A01-00AH	PM-M12T-03P-FF-SL8A01-00AH	PM-M12S-04P-FF-SL8A01-00AH	PM-M12T-04P-FF-SL8A01-00AH
	3m	PM-M12S-03P-FF-SL8A03-00AH	PM-M12T-03P-FF-SL8A03-00AH	PM-M12S-04P-FF-SL8A03-00AH	PM-M12T-04P-FF-SL8A03-00AH
	5m	PM-M12S-03P-FF-SL8A05-00AH	PM-M12T-03P-FF-SL8A05-00AH	PM-M12S-04P-FF-SL8A05-00AH	PM-M12T-04P-FF-SL8A05-00AH
	Customized				
PUR	1m	PM-M12S-03P-FF-SL8B01-00AH	PM-M12T-03P-FF-SL8B01-00AH	PM-M12S-04P-FF-SL8B01-00AH	PM-M12T-04P-FF-SL8B01-00AH
	3m	PM-M12S-03P-FF-SL8B03-00AH	PM-M12T-03P-FF-SL8B03-00AH	PM-M12S-04P-FF-SL8B03-00AH	PM-M12T-04P-FF-SL8B03-00AH
	5m	PM-M12S-03P-FF-SL8B05-00AH	PM-M12T-03P-FF-SL8B05-00AH	PM-M12S-04P-FF-SL8B05-00AH	PM-M12T-04P-FF-SL8B05-00AH
	Customized				

M12 x 1 Female Overmolded with Cable Plug,Single end,Unshielded,Angled.

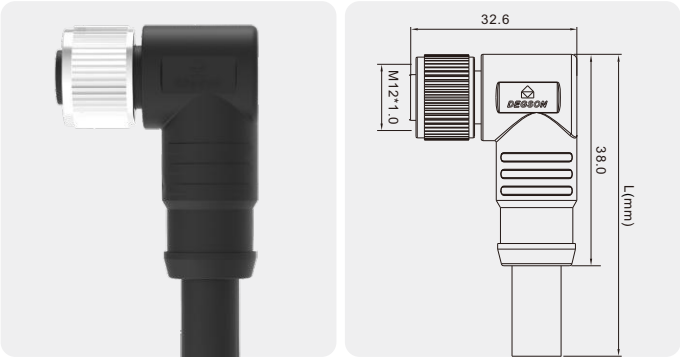


Technical Data

Standard	IEC 61076	Contact carriers material	PU
Series	M12, Female, Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	12A max.	Seal	Silicone
Rated voltage	630V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ +80°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin		04 Pin	
Coding	Coded	S-Coded	T-Coded	S-Coded	T-Coded
	Front View				
Rated current	A.	12A	12A	12A	12A
Rated voltage	V.	630V	63V	630V	63V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG	16AWG
	Cross section	1.5mm²	1.5mm²	1.5mm²	1.5mm²
	Wiring list	1.BK1 3.BK3 4.YE/GN	1.BN 3.BU 4.BK	1.BK1 2.BK2 3.BK3 4.YE/GN	1.BN 2.WH 3.BU 4.BK
Description		Order NO .		Order NO .	
PVC	1m	PM-M12S-03P-FF-SR8A01-00AH	PM-M12T-03P-FF-SR8A01-00AH	PM-M12S-04P-FF-SR8A01-00AH	PM-M12T-04P-FF-SR8A01-00AH
	3m	PM-M12S-03P-FF-SR8A03-00AH	PM-M12T-03P-FF-SR8A03-00AH	PM-M12S-04P-FF-SR8A03-00AH	PM-M12T-04P-FF-SR8A03-00AH
	5m	PM-M12S-03P-FF-SR8A05-00AH	PM-M12T-03P-FF-SR8A05-00AH	PM-M12S-04P-FF-SR8A05-00AH	PM-M12T-04P-FF-SR8A05-00AH
	Customized				
PUR	1m	PM-M12S-03P-FF-SR8B01-00AH	PM-M12T-03P-FF-SR8B01-00AH	PM-M12S-04P-FF-SR8B01-00AH	PM-M12T-04P-FF-SR8B01-00AH
	3m	PM-M12S-03P-FF-SR8B03-00AH	PM-M12T-03P-FF-SR8B03-00AH	PM-M12S-04P-FF-SR8B03-00AH	PM-M12T-04P-FF-SR8B03-00AH
	5m	PM-M12S-03P-FF-SR8B05-00AH	PM-M12T-03P-FF-SR8B05-00AH	PM-M12S-04P-FF-SR8B05-00AH	PM-M12T-04P-FF-SR8B05-00AH
	Customized				

M12 x 1 Male Overmolded with Cable Plug,Single end,Shielded,Straight.

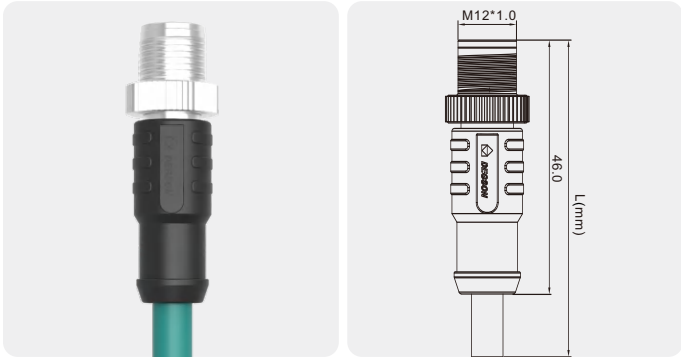


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	0.5A max.	Seal	Silicone
Rated voltage	50V AC / 60V DC	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ +75°C	—	—
IP Class	IP67	—	—

Number of Pins		08 Pin
Coding	Coded	X-Coded
	Front View	
Rated current	A.	0.5A
Rated voltage	V.	50V AC / 60V DC
Wire/Cable	Wire gauge	26AWG
	Cross section	0.14mm²
	Wiring list	1.WH / OG 2.OG 3.WH / GN 4.GN 5.WH / BN 6.BN 7.WH / BU 8.BU
Description		Order NO .
CAT6A	1m	PMSH-M12X-08P-MM-SL7X01-00AH
	3m	PMSH-M12X-08P-MM-SL7X03-00AH
	5m	PMSH-M12X-08P-MM-SL7X05-00AH
	Customized	

M12 x 1 Female Overmolded with Cable Plug,Single end,Shielded,Straight.

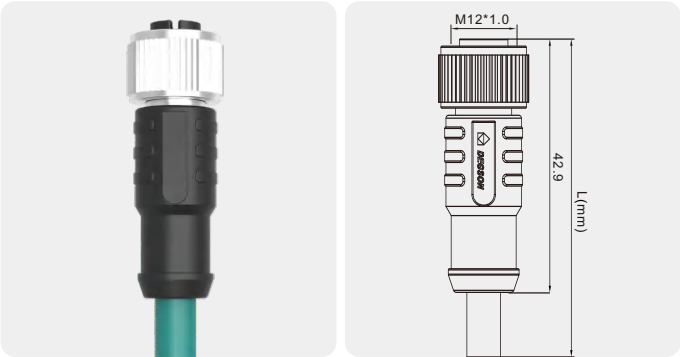


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	0.5A max.	Seal	Silicone
Rated voltage	50V AC / 60V DC	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ +75°C	—	—
IP Class	IP67	—	—

Number of Pins		08 Pin
Coding	Coded	X-Coded
	Front View	
Rated current	A.	0.5A
Rated voltage	V.	50V AC / 60V DC
Wire/Cable	Wire gauge	26AWG
	Cross section	0.14mm²
	Wiring list	1.WH / OG 2.OG 3.WH / GN 4.GN 5.WH / BN 6.BN 7.WH / BU 8.BU
Description		Order NO .
CAT6A	1m	PMSH-M12X-08P-FF-SL7X01-00AH
	3m	PMSH-M12X-08P-FF-SL7X03-00AH
	5m	PMSH-M12X-08P-FF-SL7X05-00AH
	Customized	

M12 x 1 Male Overmolded with Cable Plug,Single end,Shielded,Angled.

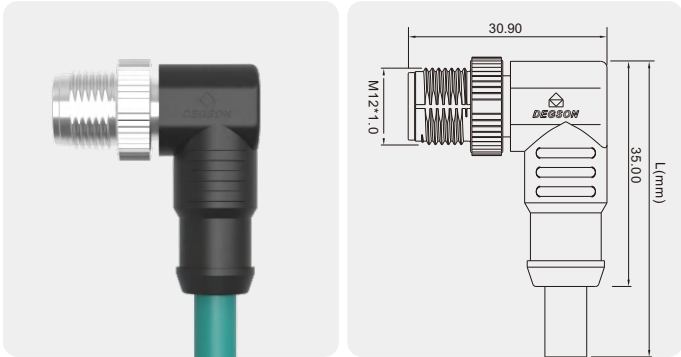


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	0.5A max.	Seal	Silicone
Rated voltage	50V AC / 60V DC	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ +75°C	—	—
IP Class	IP67	—	—

Number of Pins		08 Pin
Coding	Coded	X-Coded
	Front View	
Rated current	A.	0.5A
Rated voltage	V.	50V AC / 60V DC
Wire/Cable	Wire gauge	26AWG
	Cross section	0.14mm ²
	Wiring list	1.WH / OG 2. OG 3.WH / GN 4. GN 5.WH / BN 6. BN 7.WH / BU 8. BU
Description		Order NO .
CAT6A	1m	PMSH-M12X-08P-MM-SR7X01-00AH
	3m	PMSH-M12X-08P-MM-SR7X03-00AH
	5m	PMSH-M12X-08P-MM-SR7X05-00AH
	Customized	

M12 x 1 Female Overmolded with Cable Plug,Single end,Shielded,Angled.

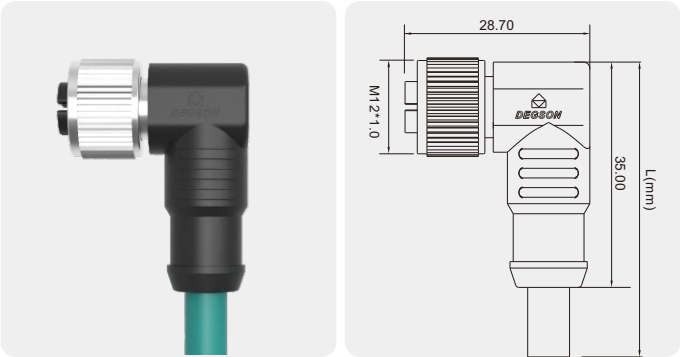


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	0.5A max.	Seal	Silicone
Rated voltage	50V AC / 60V DC	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Shielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ +75°C	—	—
IP Class	IP67	—	—

Number of Pins		08 Pin
Coding	Coded	X-Coded
	Front View	
Rated current	A.	0.5A
Rated voltage	V.	50V AC / 60V DC
Wire/Cable	Wire gauge	26AWG
	Cross section	0.14mm ²
	Wiring list	1.WH / OG 2. OG 3.WH / GN 4. GN 5.WH / BN 6. BN 7.WH / BU 8. BU
Description		Order NO .
CAT6A	1m	PMSH-M12X-08P-FF-SR7X01-00AH
	3m	PMSH-M12X-08P-FF-SR7X03-00AH
	5m	PMSH-M12X-08P-FF-SR7X05-00AH
	Customized	

M12 x 1 Male Overmolded with Cable Plug,Single end,Unshielded,Straight,LED.

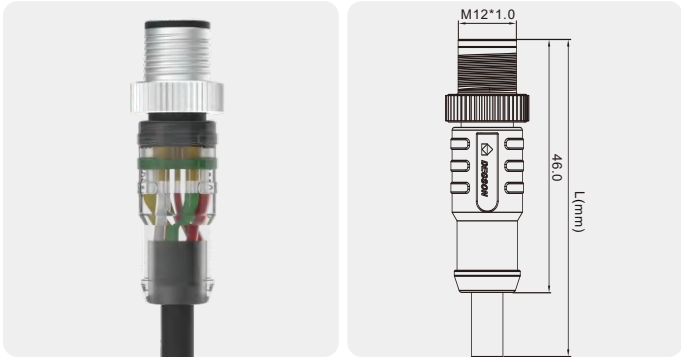


Technical Data

Standard	IEC 61076	Contact carriers material	PU
Series	M12, Male, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	04,05 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	4A	4A
Rated voltage	V.	250V	60V
Wire/Cable	Wire gauge	22AWG	22AWG
	Cross section	0.34mm²	0.34mm²
	Wiring list	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY
Description		Order NO .	Order NO .
PVC	1m	PL-M12A-04P-MM-SL8A01-00AH	PL-M12A-05P-MM-SL8A01-00AH
	3m	PL-M12A-04P-MM-SL8A03-00AH	PL-M12A-05P-MM-SL8A03-00AH
	5m	PL-M12A-04P-MM-SL8A05-00AH	PL-M12A-05P-MM-SL8A05-00AH
	Customized		
PUR	1m	PL-M12A-04P-MM-SL8B01-00AH	PL-M12A-05P-MM-SL8B01-00AH
	3m	PL-M12A-04P-MM-SL8B03-00AH	PL-M12A-05P-MM-SL8B03-00AH
	5m	PL-M12A-04P-MM-SL8B05-00AH	PL-M12A-05P-MM-SL8B05-00AH
	Customized		

M12 x 1 Male Overmolded with Cable Plug, Single end, Unshielded, Angled, LED.

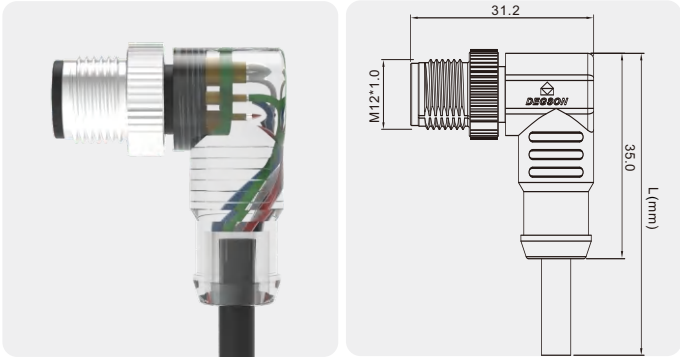


Technical Data

Standard	IEC 61076	Contact carriers material	PU
Series	M12, Male, Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	04,05 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	4A	4A
Rated voltage	V.	250V	60V
Wire/Cable	Wire gauge	22AWG	22AWG
	Cross section	0.34mm²	0.34mm²
	Wiring list	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY
Description		Order NO .	Order NO .
PVC	1m	PL-M12A-04P-MM-SR8A01-00AH	PL-M12A-05P-MM-SR8A01-00AH
	3m	PL-M12A-04P-MM-SR8A03-00AH	PL-M12A-05P-MM-SR8A03-00AH
	5m	PL-M12A-04P-MM-SR8A05-00AH	PL-M12A-05P-MM-SR8A05-00AH
	Customized		
PUR	1m	PL-M12A-04P-MM-SR8B01-00AH	PL-M12A-05P-MM-SR8B01-00AH
	3m	PL-M12A-04P-MM-SR8B03-00AH	PL-M12A-05P-MM-SR8B03-00AH
	5m	PL-M12A-04P-MM-SR8B05-00AH	PL-M12A-05P-MM-SR8B05-00AH
	Customized		

M12 x 1 Female Overmolded with Cable Plug, Single end, Unshielded, Straight, LED.

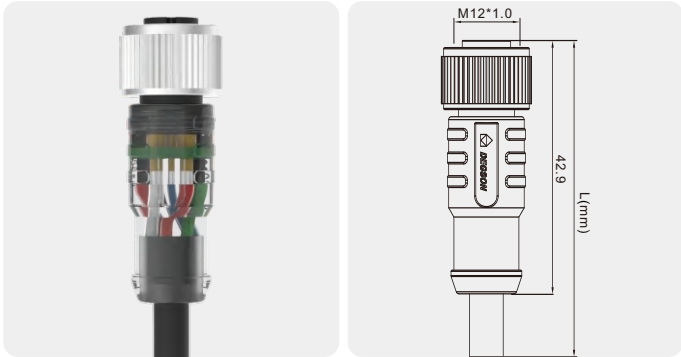


Technical Data

Standard	IEC 61076	Contact carriers material	PU
Series	M12, Female, Straight	Contact material	Copper Alloy, Gold-plated
Number of Pins	04, 05 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	4A	4A
Rated voltage	V.	250V	60V
Wire/Cable	Wire gauge	22AWG	22AWG
	Cross section	0.34mm²	0.34mm²
	Wiring list	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY
Description		Order NO .	Order NO .
PVC	1m	PL-M12A-04P-FF-SL8A01-00AH	PL-M12A-05P-FF-SL8A01-00AH
	3m	PL-M12A-04P-FF-SL8A03-00AH	PL-M12A-05P-FF-SL8A03-00AH
	5m	PL-M12A-04P-FF-SL8A05-00AH	PL-M12A-05P-FF-SL8A05-00AH
	Customized		
PUR	1m	PL-M12A-04P-FF-SL8B01-00AH	PL-M12A-05P-FF-SL8B01-00AH
	3m	PL-M12A-04P-FF-SL8B03-00AH	PL-M12A-05P-FF-SL8B03-00AH
	5m	PL-M12A-04P-FF-SL8B05-00AH	PL-M12A-05P-FF-SL8B05-00AH
	Customized		

M12 x 1 Female Overmolded with Cable Plug, Single end, Unshielded, Angled, LED.

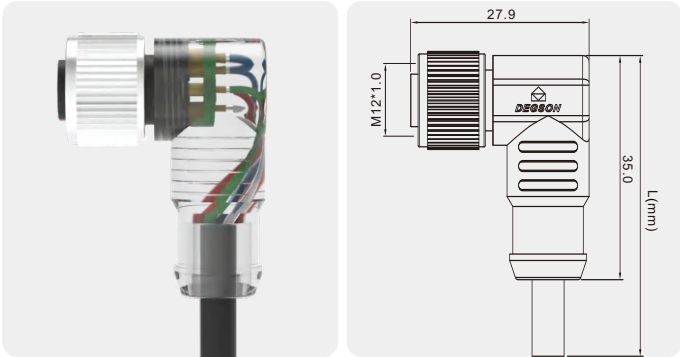


Technical Data

Standard	IEC 61076	Contact carriers material	PU
Series	M12, Female, Angled	Contact material	Copper Alloy, Gold-plated
Number of Pins	04, 05 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Cable jacket material	PUR / PVC
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded
	Front View		
Rated current	A.	4A	4A
Rated voltage	V.	250V	60V
Wire/Cable	Wire gauge	22AWG	22AWG
	Cross section	0.34mm²	0.34mm²
	Wiring list	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY
Description		Order NO .	Order NO .
PVC	1m	PL-M12A-04P-FF-SR8A01-00AH	PL-M12A-05P-FF-SR8A01-00AH
	3m	PL-M12A-04P-FF-SR8A03-00AH	PL-M12A-05P-FF-SR8A03-00AH
	5m	PL-M12A-04P-FF-SR8A05-00AH	PL-M12A-05P-FF-SR8A05-00AH
	Customized		
PUR	1m	PL-M12A-04P-FF-SR8B01-00AH	PL-M12A-05P-FF-SR8B01-00AH
	3m	PL-M12A-04P-FF-SR8B03-00AH	PL-M12A-05P-FF-SR8B03-00AH
	5m	PL-M12A-04P-FF-SR8B05-00AH	PL-M12A-05P-FF-SR8B05-00AH
	Customized		

M12 x 1 Male Panel Mount Receptacle,
Rear Mounting,With 0.5m wires.

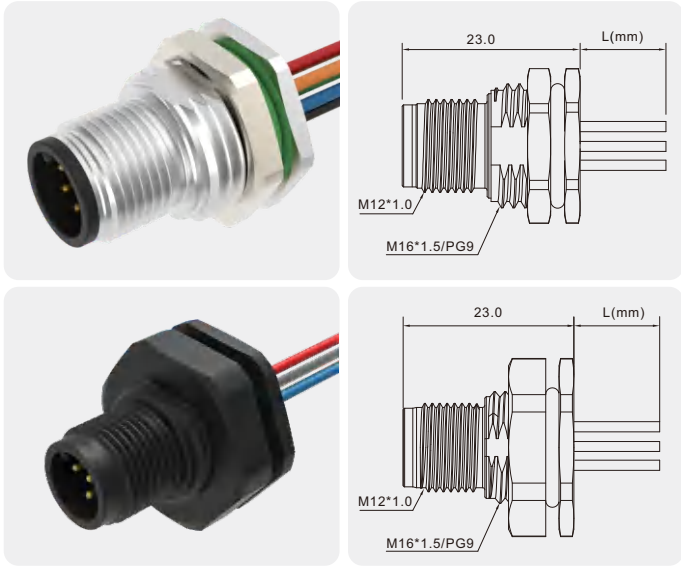


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	For Panel Thickness Max	4.5mm (Metal shell)
IP Class	IP68		3.0mm (Plastic shell)

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
	Wiring list	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.YE 5.GY	1.WH 2.BN 3.GN 4.YE 6.PK 7.BU	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	0.5m	SD-M12A-03P-MM-SF8A50-00AH	SD-M12A-04P-MM-SF8A50-00AH	SD-M12A-05P-MM-SF8A50-00AH	SD-M12A-06P-MM-SF8A50-00AH
	Plastic shell	0.5m	SD-M12A-03P-MM-SF8D50-00AH	SD-M12A-04P-MM-SF8D50-00AH	SD-M12A-05P-MM-SF8D50-00AH	SD-M12A-06P-MM-SF8D50-00AH
	Customized					
M16*1.5	Metal shell	0.5m	SD-M12A-03P-MM-SF8B50-00AH	SD-M12A-04P-MM-SF8B50-00AH	SD-M12A-05P-MM-SF8B50-00AH	SD-M12A-06P-MM-SF8B50-00AH
	Plastic shell	0.5m	SD-M12A-03P-MM-SF8E50-00AH	SD-M12A-04P-MM-SF8E50-00AH	SD-M12A-05P-MM-SF8E50-00AH	SD-M12A-06P-MM-SF8E50-00AH
	Customized					

M12 x 1 Male Panel Mount Receptacle,
Rear Mounting,With 0.5m wires.

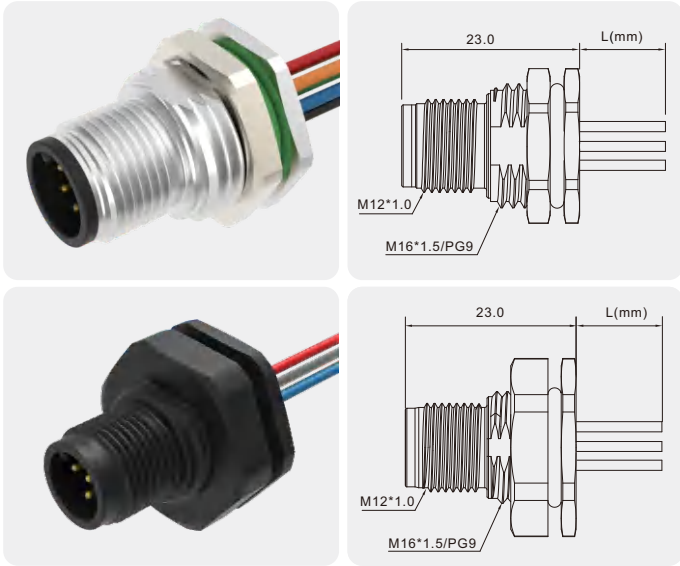


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	For Panel Thickness Max	4.5mm (Metal shell)
IP Class	IP68		3.0mm (Plastic shell)

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
	Wiring list	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU 13.WH/GN 14.BN/GN 15.WH/YW 16.YW/BN 17.WH/GY	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	0.5m	SD-M12A-10P-MM-SF8A50-00AH	SD-M12A-12P-MM-SF8A50-00AH	SD-M12A-17P-MM-SF8A50-00AH	SD-M12B-05P-MM-SF8A50-00AH
	Plastic shell	0.5m	SD-M12A-10P-MM-SF8D50-00AH	SD-M12A-12P-MM-SF8D50-00AH	SD-M12A-17P-MM-SF8D50-00AH	SD-M12B-05P-MM-SF8D50-00AH
	Customized					
M16*1.5	Metal shell	0.5m	SD-M12A-10P-MM-SF8B50-00AH	SD-M12A-12P-MM-SF8B50-00AH	SD-M12A-17P-MM-SF8B50-00AH	SD-M12B-05P-MM-SF8B50-00AH
	Plastic shell	0.5m	SD-M12A-10P-MM-SF8E50-00AH	SD-M12A-12P-MM-SF8E50-00AH	SD-M12A-17P-MM-SF8E50-00AH	SD-M12B-05P-MM-SF8E50-00AH
	Customized					

M12 x 1 Male Panel Mount Receptacle, Front Mounting, With 0.5m wires.

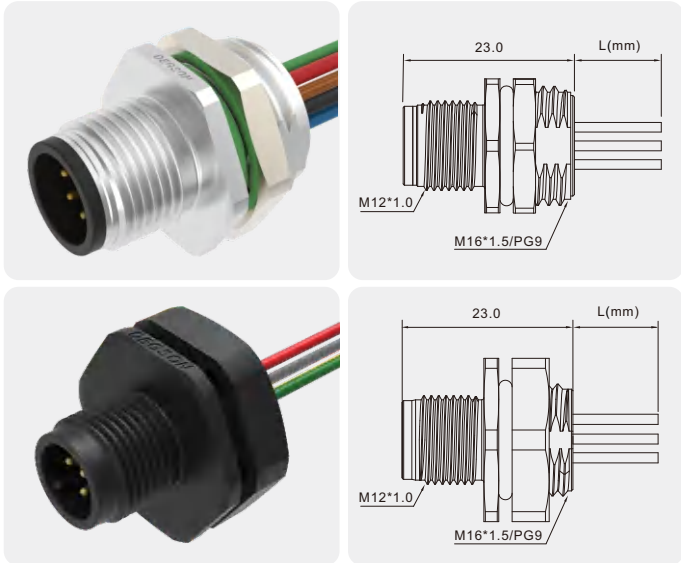


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ +80°C	For Panel Thickness Max	4.5mm (Metal shell)
IP Class	IP68		3.0mm (Plastic shell)

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
	Wiring list	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.YE 5.GY	1.WH 2.BN 3.GN 4.YE 6.PK 7.BU	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	0.5m	SD-M12A-03P-MM-SH8A50-00AH	SD-M12A-04P-MM-SH8A50-00AH	SD-M12A-05P-MM-SH8A50-00AH	SD-M12A-06P-MM-SH8A50-00AH
	Plastic shell	0.5m	SD-M12A-03P-MM-SH8D50-00AH	SD-M12A-04P-MM-SH8D50-00AH	SD-M12A-05P-MM-SH8D50-00AH	SD-M12A-06P-MM-SH8D50-00AH
	Customized					
M16*1.5	Metal shell	0.5m	SD-M12A-03P-MM-SH8B50-00AH	SD-M12A-04P-MM-SH8B50-00AH	SD-M12A-05P-MM-SH8B50-00AH	SD-M12A-06P-MM-SH8B50-00AH
	Plastic shell	0.5m	SD-M12A-03P-MM-SH8E50-00AH	SD-M12A-04P-MM-SH8E50-00AH	SD-M12A-05P-MM-SH8E50-00AH	SD-M12A-06P-MM-SH8E50-00AH
	Customized					

M12 x 1 Male Panel Mount Receptacle, Front Mounting, With 0.5m wires.

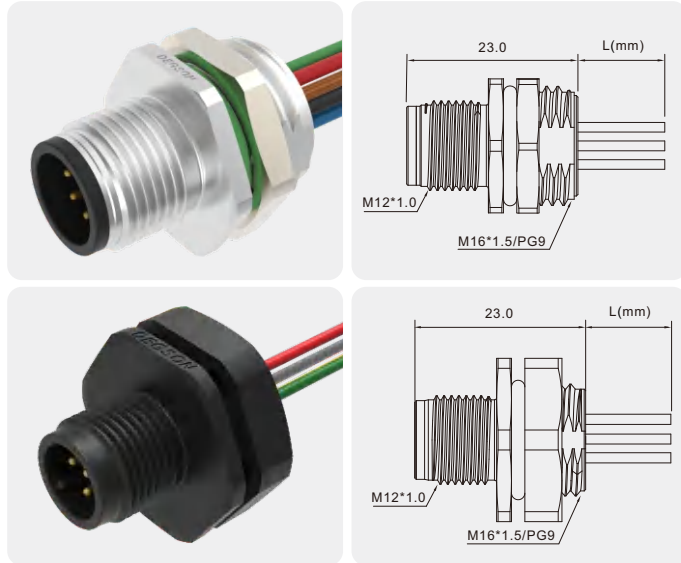


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ +80°C	For Panel Thickness Max	4.5mm (Metal shell)
IP Class	IP68		3.0mm (Plastic shell)

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
	Wiring list	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU 13.WH/GN 14.BN/GN 15.WH/YW 16.YW/BN 17.WH/GY	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	0.5m	SD-M12A-10P-MM-SH8A50-00AH	SD-M12A-12P-MM-SH8A50-00AH	SD-M12A-17P-MM-SH8A50-00AH	SD-M12D-04P-MM-SH8A50-00AH
	Plastic shell	0.5m	SD-M12A-10P-MM-SH8D50-00AH	SD-M12A-12P-MM-SH8D50-00AH	SD-M12A-17P-MM-SH8D50-00AH	SD-M12D-04P-MM-SH8D50-00AH
	Customized					
M16*1.5	Metal shell	0.5m	SD-M12A-10P-MM-SH8B50-00AH	SD-M12A-12P-MM-SH8B50-00AH	SD-M12A-17P-MM-SH8B50-00AH	SD-M12D-04P-MM-SH8B50-00AH
	Plastic shell	0.5m	SD-M12A-10P-MM-SH8E50-00AH	SD-M12A-12P-MM-SH8E50-00AH	SD-M12A-17P-MM-SH8E50-00AH	SD-M12D-04P-MM-SH8E50-00AH
	Customized					

M12 x 1 Female Panel Mount Receptacle, Rear Mounting, With 0.5m wires.

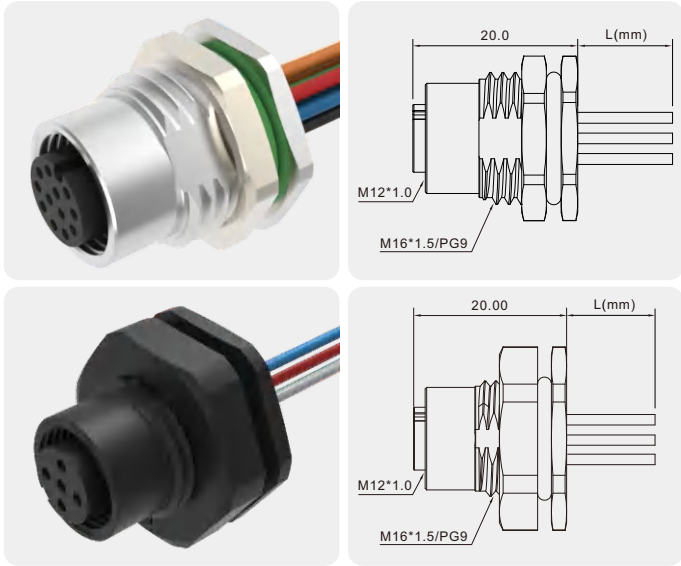


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	For Panel Thickness Max	4.5mm (Metal shell)
IP Class	IP68		3.0mm (Plastic shell)

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
	Wiring list	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.WH 2.BN 3.GN 4.YE 6.PK 7.BU	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	0.5m	SD-M12A-03P-FF-SF8A50-00AH	SD-M12A-04P-FF-SF8A50-00AH	SD-M12A-05P-FF-SF8A50-00AH	SD-M12A-06P-FF-SF8A50-00AH
	Plastic shell	0.5m	SD-M12A-03P-FF-SF8D50-00AH	SD-M12A-04P-FF-SF8D50-00AH	SD-M12A-05P-FF-SF8D50-00AH	SD-M12A-06P-FF-SF8D50-00AH
	Customized					
M16*1.5	Metal shell	0.5m	SD-M12A-03P-FF-SF8B50-00AH	SD-M12A-04P-FF-SF8B50-00AH	SD-M12A-05P-FF-SF8B50-00AH	SD-M12A-06P-FF-SF8B50-00AH
	Plastic shell	0.5m	SD-M12A-03P-FF-SF8E50-00AH	SD-M12A-04P-FF-SF8E50-00AH	SD-M12A-05P-FF-SF8E50-00AH	SD-M12A-06P-FF-SF8E50-00AH
	Customized					

M12 x 1 Female Panel Mount Receptacle, Rear Mounting, With 0.5m wires.

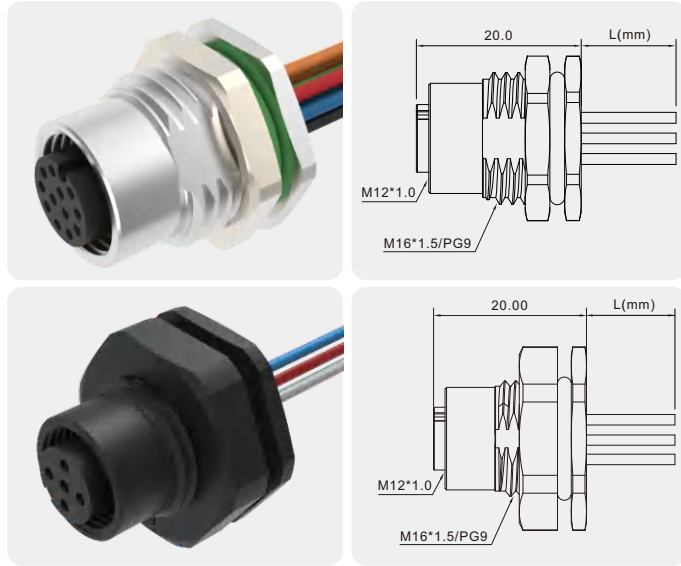


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	For Panel Thickness Max	4.5mm (Metal shell)
IP Class	IP68		3.0mm (Plastic shell)

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
	Wiring list	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU 13.WH/GN 14.BN/GN 15.WH/YW 16.YW/BN 17.WH/GY	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	0.5m	SD-M12A-10P-FF-SF8A50-00AH	SD-M12A-12P-FF-SF8A50-00AH	SD-M12A-17P-FF-SF8A50-00AH	SD-M12D-04P-FF-SF8A50-00AH
	Plastic shell	0.5m	SD-M12A-10P-FF-SF8D50-00AH	SD-M12A-12P-FF-SF8D50-00AH	SD-M12A-17P-FF-SF8D50-00AH	SD-M12D-04P-FF-SF8D50-00AH
	Customized					
M16*1.5	Metal shell	0.5m	SD-M12A-10P-FF-SF8B50-00AH	SD-M12A-12P-FF-SF8B50-00AH	SD-M12A-17P-FF-SF8B50-00AH	SD-M12D-04P-FF-SF8B50-00AH
	Plastic shell	0.5m	SD-M12A-10P-FF-SF8E50-00AH	SD-M12A-12P-FF-SF8E50-00AH	SD-M12A-17P-FF-SF8E50-00AH	SD-M12D-04P-FF-SF8E50-00AH
	Customized					

M12 x 1 Female Panel Mount Receptacle,
Front Mounting, With 0.5m wires.

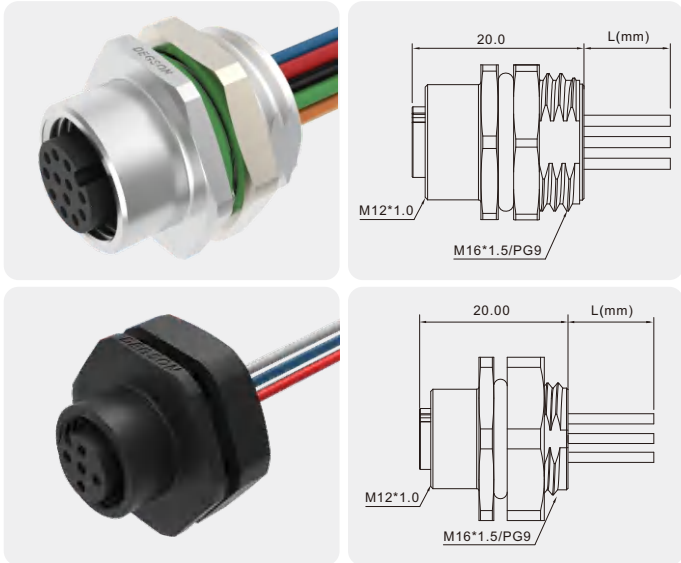


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	For Panel Thickness Max	4.5mm (Metal shell)
IP Class	IP68		3.0mm (Plastic shell)

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
	Wiring list	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK	1.BN 2.WH 3.BU 4.BK 5.GY	1.WH 2.BN 3.GN 4.YE 6.PK 7.BU	1.WH 2.BN 3.GN 4.YE 5.GY 6.PK 7.BU 8.RD
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	0.5m	SD-M12A-03P-FF-SH8A50-00AH	SD-M12A-04P-FF-SH8A50-00AH	SD-M12A-05P-FF-SH8A50-00AH	SD-M12A-06P-FF-SH8A50-00AH
	Plastic shell	0.5m	SD-M12A-03P-FF-SH8D50-00AH	SD-M12A-04P-FF-SH8D50-00AH	SD-M12A-05P-FF-SH8D50-00AH	SD-M12A-06P-FF-SH8D50-00AH
	Customized					
M16*1.5	Metal shell	0.5m	SD-M12A-03P-FF-SH8B50-00AH	SD-M12A-04P-FF-SH8B50-00AH	SD-M12A-05P-FF-SH8B50-00AH	SD-M12A-06P-FF-SH8B50-00AH
	Plastic shell	0.5m	SD-M12A-03P-FF-SH8E50-00AH	SD-M12A-04P-FF-SH8E50-00AH	SD-M12A-05P-FF-SH8E50-00AH	SD-M12A-06P-FF-SH8E50-00AH
	Customized					

M12 x 1 Female Panel Mount Receptacle,
Front Mounting, With 0.5m wires.

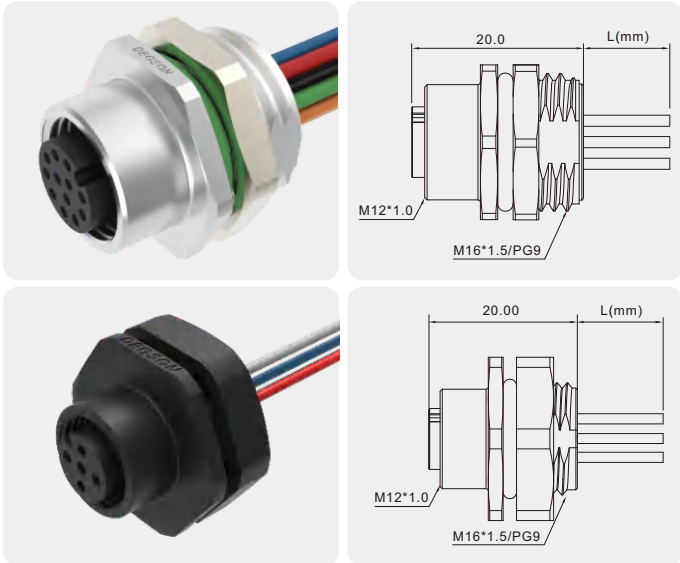


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 80°C	For Panel Thickness Max	4.5mm (Metal shell)
IP Class	IP68		3.0mm (Plastic shell)

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
	Wiring list	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU	1.BN 2.BU 3.WH 4.GN 5.PK 6.YW 7.BK 8.GY 9.RD 10.VT 11.GY/PK 12.RD/BU 13.WH/GN 14.BN/GN 15.WH/YW 16.YW/BN 17.WH/GY	1.BN 2.WH 3.BU 4.BK 5.GY	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	0.5m	SD-M12A-10P-FF-SH8A50-00AH	SD-M12A-12P-FF-SH8A50-00AH	SD-M12A-17P-FF-SH8A50-00AH	SD-M12D-04P-FF-SH8A50-00AH
	Plastic shell	0.5m	SD-M12A-10P-FF-SH8D50-00AH	SD-M12A-12P-FF-SH8D50-00AH	SD-M12A-17P-FF-SH8D50-00AH	SD-M12D-04P-FF-SH8D50-00AH
	Customized					
M16*1.5	Metal shell	0.5m	SD-M12A-10P-FF-SH8B50-00AH	SD-M12A-12P-FF-SH8B50-00AH	SD-M12A-17P-FF-SH8B50-00AH	SD-M12D-04P-FF-SH8B50-00AH
	Plastic shell	0.5m	SD-M12A-10P-FF-SH8E50-00AH	SD-M12A-12P-FF-SH8E50-00AH	SD-M12A-17P-FF-SH8E50-00AH	SD-M12D-04P-FF-SH8E50-00AH
	Customized					

M12 x 1 Male Panel Mount Receptacle,
Rear Mounting,With 0.5m wires.

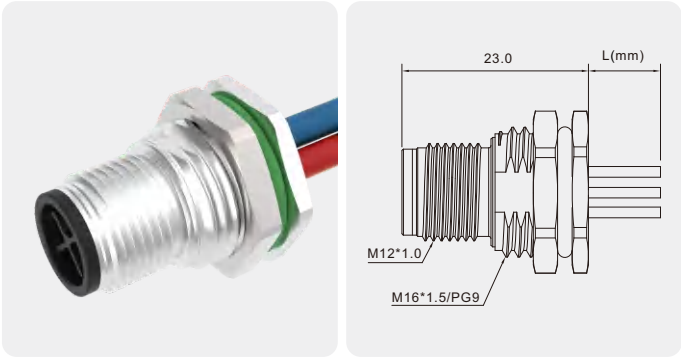


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	12A max.	Seal	Silicone
Rated voltage	630V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	For Panel Thickness Max	4.5mm
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin		04 Pin	
Coding	Coded	S-Coded	T-Coded	S-Coded	T-Coded
	Front View				
Rated current	A.	12A	12A	12A	12A
Rated voltage	V.	630V	63V	630V	63V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG	16AWG
	Cross section	1.5mm²	1.5mm²	1.5mm²	1.5mm²
	Wiring list	1.BK1 3.BU 4.YE/GN	1.BN 3.BU 4.BK	1.BK1 2.BK2 3.BK3 4.YE/GN	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .	Order NO .	Order NO .
PG9	0.5m	SD-M12S-03P-MM-SF8A50-00AH	SD-M12T-03P-MM-SF8A50-00AH	SD-M12S-04P-MM-SF8A50-00AH	SD-M12T-04P-MM-SF8A50-00AH
	Customized				
M16*1.5	0.5m	SD-M12S-03P-MM-SF8B50-00AH	SD-M12T-03P-MM-SF8B50-00AH	SD-M12S-04P-MM-SF8B50-00AH	SD-M12T-04P-MM-SF8B50-00AH
	Customized				

M12 x 1 Male Panel Mount Receptacle,
Front Mounting,With 0.5m wires.

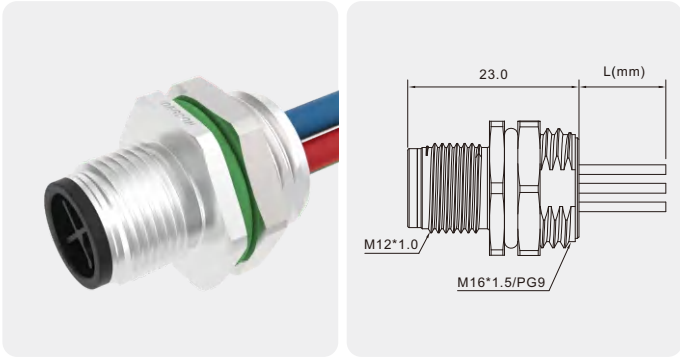


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	12A max.	Seal	Silicone
Rated voltage	630V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	For Panel Thickness Max	4.5mm
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin		04 Pin	
Coding	Coded	S-Coded	T-Coded	S-Coded	T-Coded
	Front View				
Rated current	A.	12A	12A	12A	12A
Rated voltage	V.	630V	63V	630V	63V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG	16AWG
	Cross section	1.5mm²	1.5mm²	1.5mm²	1.5mm²
	Wiring list	1.BK1 3.BK3 4.YE/GN	1.BN 3.BU 4.BK	1.BK1 2.BK2 3.BK3 4.YE/GN	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .	Order NO .	Order NO .
PG9	0.5m	SD-M12S-03P-MM-SH8A50-00AH	SD-M12T-03P-MM-SH8A50-00AH	SD-M12S-04P-MM-SH8A50-00AH	SD-M12T-04P-MM-SH8A50-00AH
	Customized				
M16*1.5	0.5m	SD-M12S-03P-MM-SH8B50-00AH	SD-M12T-03P-MM-SH8B50-00AH	SD-M12S-04P-MM-SH8B50-00AH	SD-M12T-04P-MM-SH8B50-00AH
	Customized				

M12 x 1 Female Panel Mount Receptacle,
Rear Mounting, With 0.5m wires.

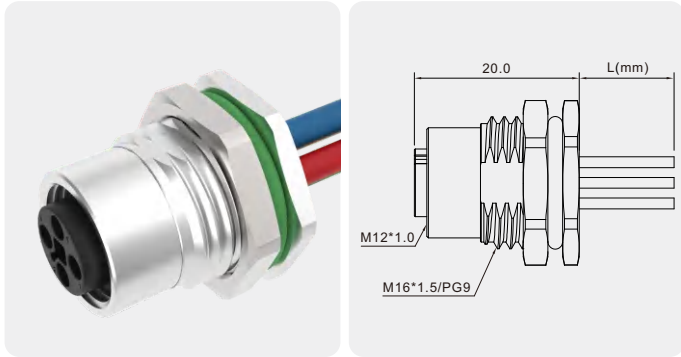


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	12A max.	Seal	Silicone
Rated voltage	630V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	For Panel Thickness Max	4.5mm
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin		04 Pin	
Coding	Coded	S-Coded	T-Coded	S-Coded	T-Coded
	Front View				
Rated current	A.	12A	12A	12A	12A
Rated voltage	V.	630V	63V	630V	63V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG	16AWG
	Cross section	1.5mm²	1.5mm²	1.5mm²	1.5mm²
	Wiring list	1.BK1 3.BK3 4.YE/GN	1.BN 3.BU 4.BK	1.BK1 2.BK2 3.BK3 4.YE/GN	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .	Order NO .	Order NO .
PG9	0.5m	SD-M12S-03P-FF-SF8A50-00AH	SD-M12T-03P-FF-SF8A50-00AH	SD-M12S-04P-FF-SF8A50-00AH	SD-M12T-04P-FF-SF8A50-00AH
	Customized				
M16*1.5	0.5m	SD-M12S-03P-FF-SF8B50-00AH	SD-M12T-03P-FF-SF8B50-00AH	SD-M12S-04P-FF-SF8B50-00AH	SD-M12T-04P-FF-SF8B50-00AH
	Customized				

M12 x 1 Female Panel Mount Receptacle,
Front Mounting, With 0.5m wires.

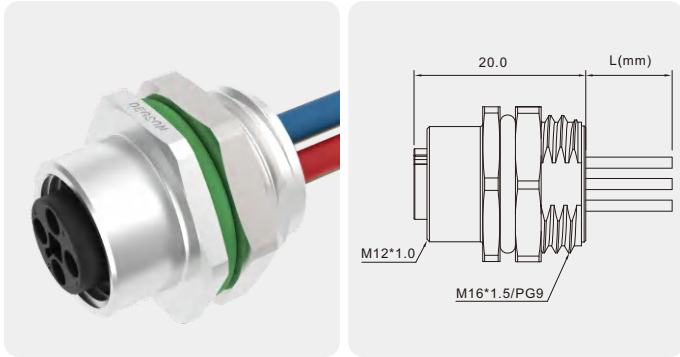


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	12A max.	Seal	Silicone
Rated voltage	630V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	For Panel Thickness Max	4.5mm
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin		04 Pin	
Coding	Coded	S-Coded	T-Coded	S-Coded	T-Coded
	Front View				
Rated current	A.	12A	12A	12A	12A
Rated voltage	V.	630V	63V	630V	63V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG	16AWG
	Cross section	1.5mm²	1.5mm²	1.5mm²	1.5mm²
	Wiring list	1.BK1 3.BK3 4.YE/GN	1.BN 3.BU 4.BK	1.BK1 2.BK2 3.BK3 4.YE/GN	1.BN 2.WH 3.BU 4.BK
Description		Order NO .	Order NO .	Order NO .	Order NO .
PG9	0.5m	SD-M12S-03P-FF-SH8A50-00AH	SD-M12T-03P-FF-SH8A50-00AH	SD-M12S-04P-FF-SH8A50-00AH	SD-M12T-04P-FF-SH8A50-00AH
	Customized				
M16*1.5	0.5m	SD-M12S-03P-FF-SH8B50-00AH	SD-M12T-03P-FF-SH8B50-00AH	SD-M12S-04P-FF-SH8B50-00AH	SD-M12T-04P-FF-SH8B50-00AH
	Customized				

M12 x 1 Male Panel Mount Receptacle,
Rear Mounting,Unshielded,PCB Soldering.

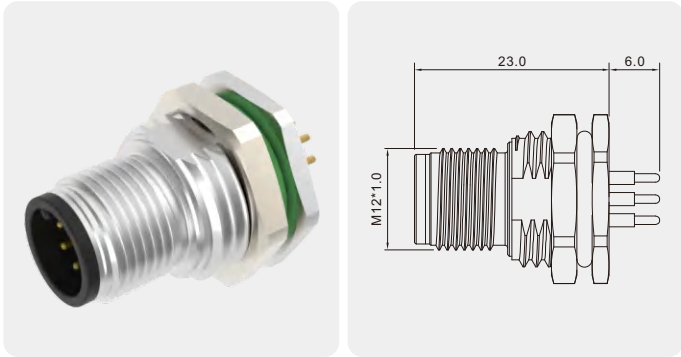


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	For Panel Thickness Max	4.5mm
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9		SP-M12A-03P-MM-SF8001-00AH	SP-M12A-04P-MM-SF8001-00AH	SP-M12A-05P-MM-SF8001-00AH	SP-M12A-06P-MM-SF8001-00AH	SP-M12A-08P-MM-SF8001-00AH
Customized						
M16*1.5		SP-M12A-03P-MM-SF8002-00AH	SP-M12A-04P-MM-SF8002-00AH	SP-M12A-05P-MM-SF8002-00AH	SP-M12A-06P-MM-SF8002-00AH	SP-M12A-08P-MM-SF8002-00AH
Customized						

Dimension Figure

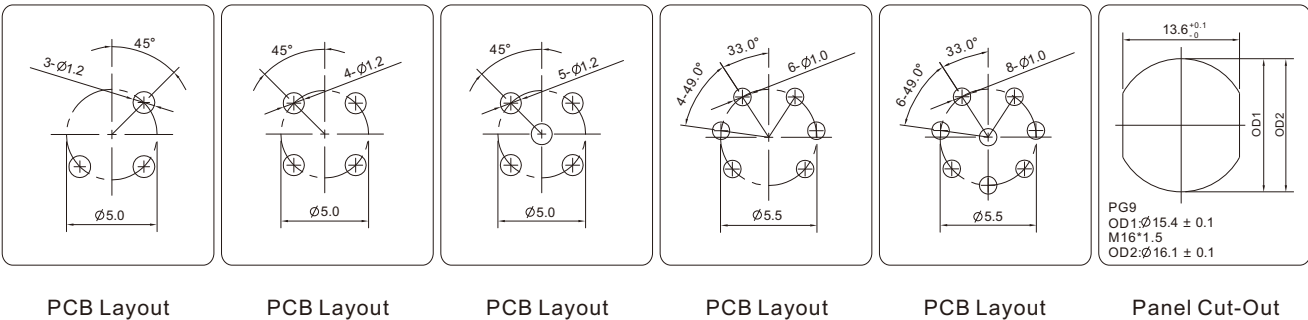

M12 x 1 Male Panel Mount Receptacle,
Rear Mounting,Unshielded,PCB Soldering.

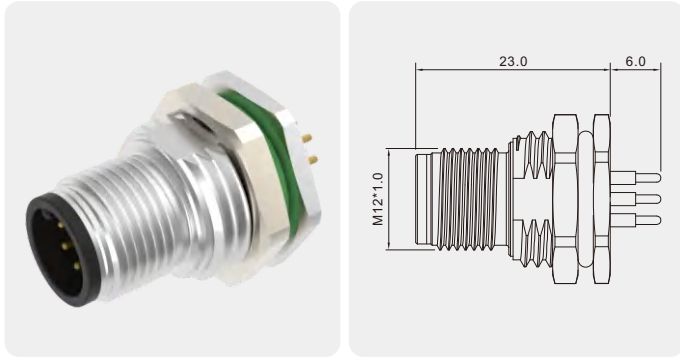


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	For Panel Thickness Max	4.5mm
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105°C	—	—
IP Class	IP68	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9		SP-M12A-10P-MM-SF8001-00AH	SP-M12A-12P-MM-SF8001-00AH	SP-M12A-17P-MM-SF8001-00AH	SP-M12B-05P-MM-SF8001-00AH	SP-M12D-04P-MM-SF8001-00AH
Customized						
M16*1.5		SP-M12A-10P-MM-SF8002-00AH	SP-M12A-12P-MM-SF8002-00AH	SP-M12A-17P-MM-SF8002-00AH	SP-M12B-05P-MM-SF8002-00AH	SP-M12D-04P-MM-SF8002-00AH
Customized						

Dimension Figure

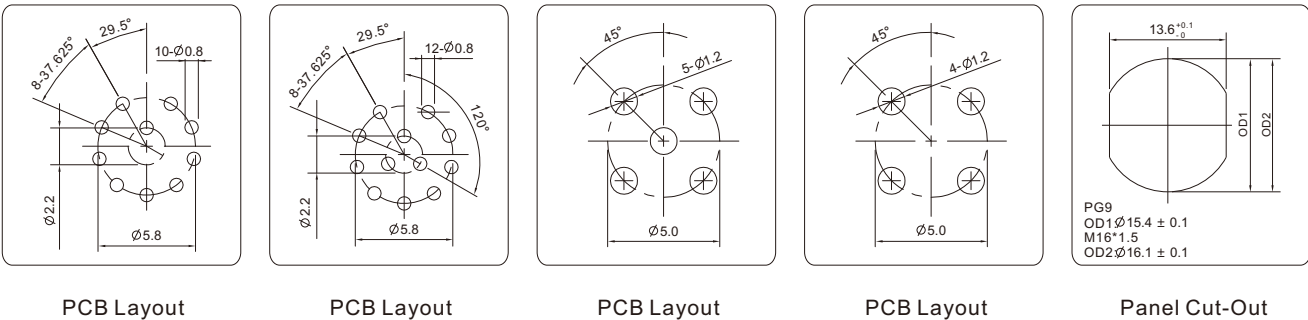

M12 x 1 Male Panel Mount Receptacle,
Front Mounting,Unshielded,PCB Soldering.

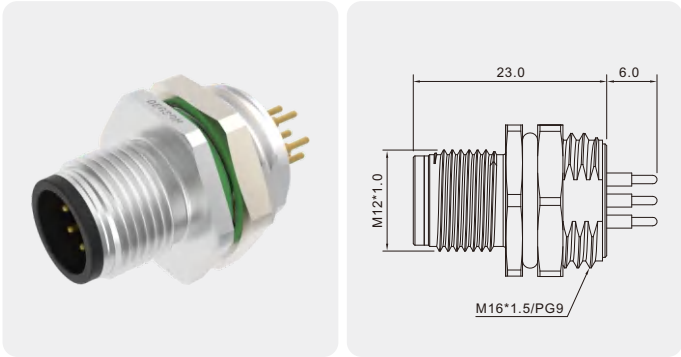


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	For Panel Thickness Max	4.5mm
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9		SP-M12A-03P-MM-SH8001-00AH	SP-M12A-04P-MM-SH8001-00AH	SP-M12A-05P-MM-SH8001-00AH	SP-M12A-06P-MM-SH8001-00AH	SP-M12A-08P-MM-SH8001-00AH
Customized						
M16*1.5		SP-M12A-03P-MM-SH8002-00AH	SP-M12A-04P-MM-SH8002-00AH	SP-M12A-05P-MM-SH8002-00AH	SP-M12A-06P-MM-SH8002-00AH	SP-M12A-08P-MM-SH8002-00AH
Customized						

Dimension Figure

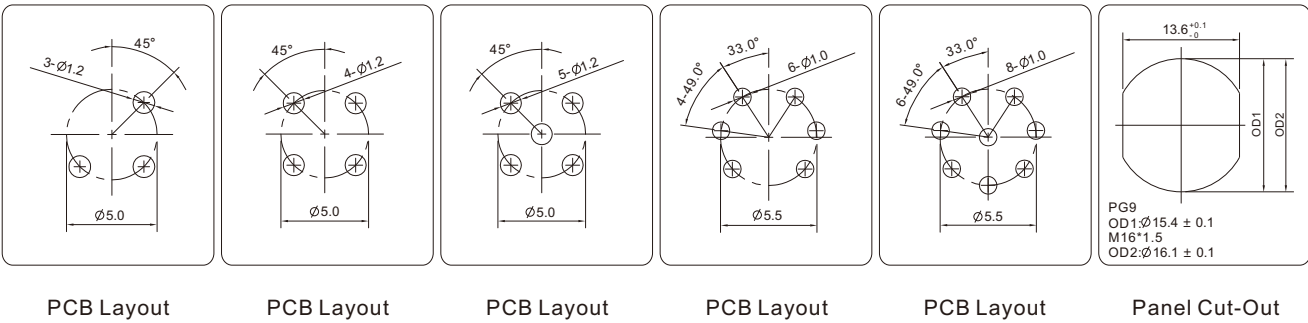

M12 x 1 Male Panel Mount Receptacle,
Front Mounting,Unshielded,PCB Soldering.

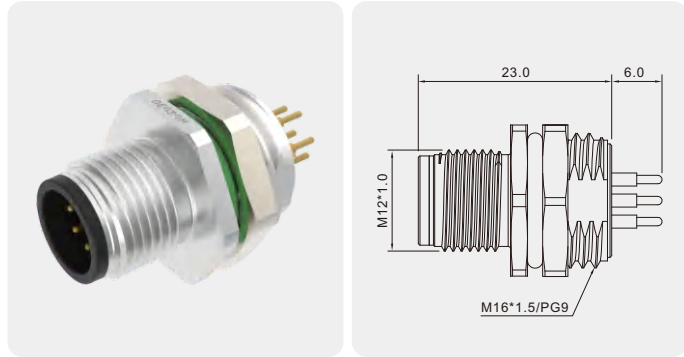


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	For Panel Thickness Max	4.5mm
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105°C	—	—
IP Class	IP68	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9		SP-M12A-10P-MM-SH8001-00AH	SP-M12A-12P-MM-SH8001-00AH	SP-M12A-17P-MM-SH8001-00AH	SP-M12B-05P-MM-SH8001-00AH	SP-M12D-04P-MM-SH8001-00AH
Customized						
M16*1.5		SP-M12A-10P-MM-SH8002-00AH	SP-M12A-12P-MM-SH8002-00AH	SP-M12A-17P-MM-SH8002-00AH	SP-M12B-05P-MM-SH8002-00AH	SP-M12D-04P-MM-SH8002-00AH
Customized						

Dimension Figure

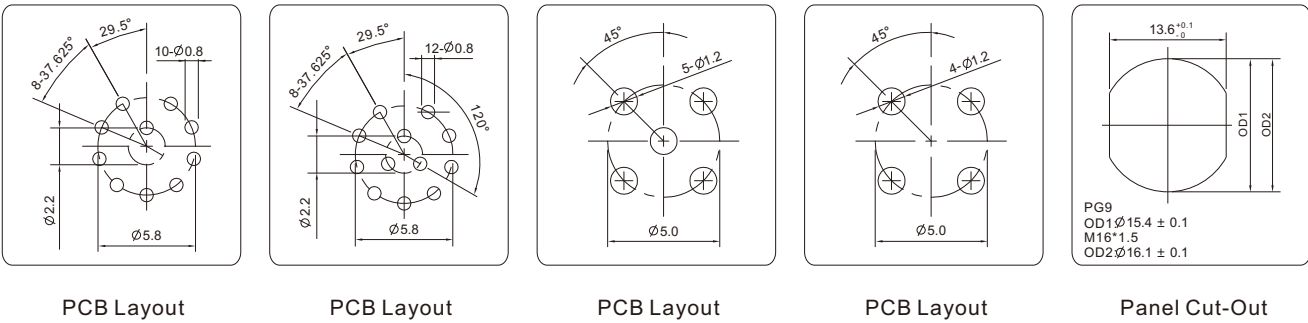

M12 x 1 Female Panel Mount Receptacle,
Rear Mounting, Unshielded, PCB Soldering.

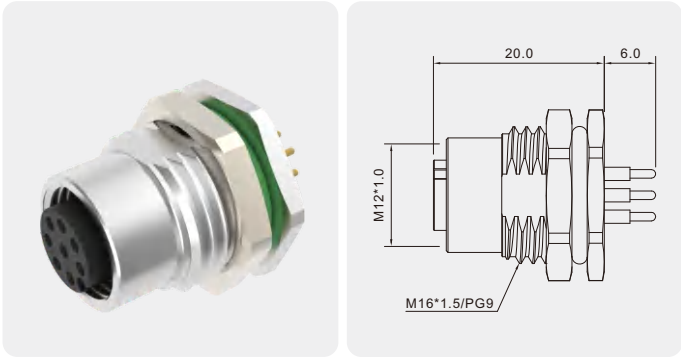


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	For Panel Thickness Max	4.5mm
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9		SP-M12A-03P-FF-SF8001-00AH	SP-M12A-04P-FF-SF8001-00AH	SP-M12A-05P-FF-SF8001-00AH	SP-M12A-06P-FF-SF8001-00AH	SP-M12A-08P-FF-SF8001-00AH
Customized						
M16*1.5		SP-M12A-03P-FF-SF8002-00AH	SP-M12A-04P-FF-SF8002-00AH	SP-M12A-05P-FF-SF8002-00AH	SP-M12A-06P-FF-SF8002-00AH	SP-M12A-08P-FF-SF8002-00AH
Customized						

Dimension Figure

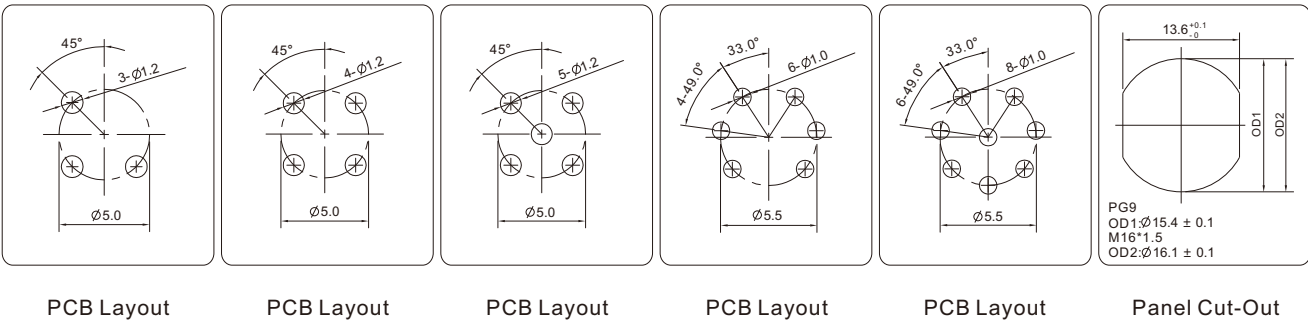

M12 x 1 Female Panel Mount Receptacle,
Rear Mounting, Unshielded, PCB Soldering.

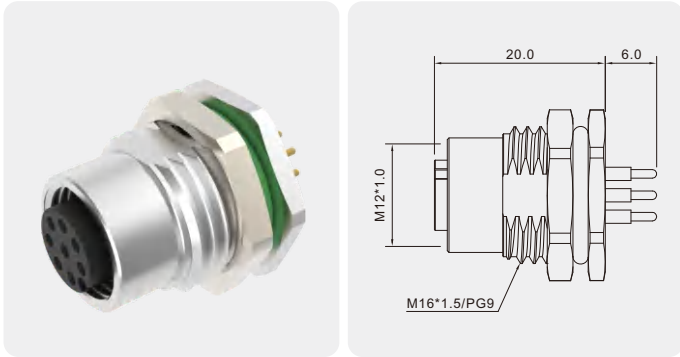


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	For Panel Thickness Max	4.5mm
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105°C	—	—
IP Class	IP68	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9		SP-M12A-10P-FF-SF8001-00AH	SP-M12A-12P-FF-SF8001-00AH	SP-M12A-17P-FF-SF8001-00AH	SP-M12B-05P-FF-SF8001-00AH	SP-M12D-04P-FF-SF8001-00AH
Customized						
M16*1.5		SP-M12A-10P-FF-SF8002-00AH	SP-M12A-12P-FF-SF8002-00AH	SP-M12A-17P-FF-SF8002-00AH	SP-M12B-05P-FF-SF8002-00AH	SP-M12D-04P-FF-SF8002-00AH
Customized						

Dimension Figure

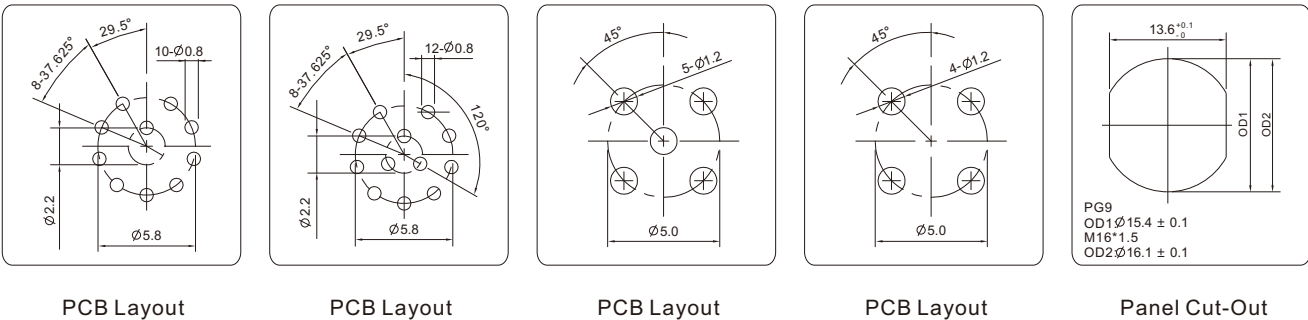

M12 x 1 Female Panel Mount Receptacle,
Front Mounting,Unshielded,PCB Soldering.

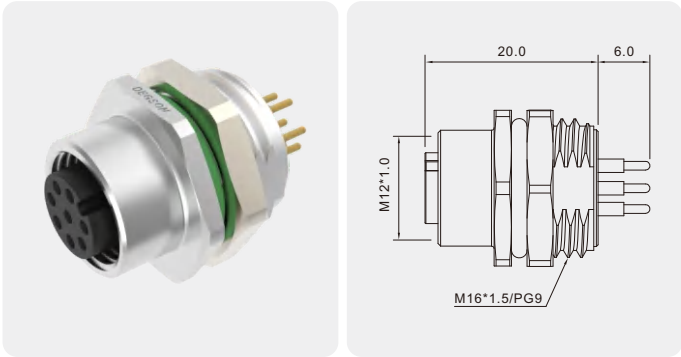


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	For Panel Thickness Max	4.5mm
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105℃	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9		SP-M12A-03P-FF-SH8001-00AH	SP-M12A-04P-FF-SH8001-00AH	SP-M12A-05P-FF-SH8001-00AH	SP-M12A-06P-FF-SH8001-00AH	SP-M12A-08P-FF-SH8001-00AH
Customized						
M16*1.5		SP-M12A-03P-FF-SH8002-00AH	SP-M12A-04P-FF-SH8002-00AH	SP-M12A-05P-FF-SH8002-00AH	SP-M12A-06P-FF-SH8002-00AH	SP-M12A-08P-FF-SH8002-00AH
Customized						

Dimension Figure

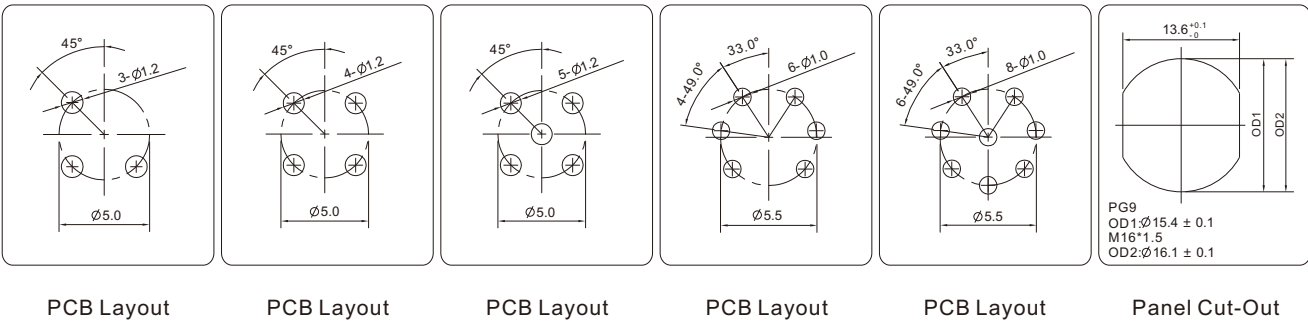

M12 x 1 Female Panel Mount Receptacle,
Front Mounting,Unshielded,PCB Soldering.

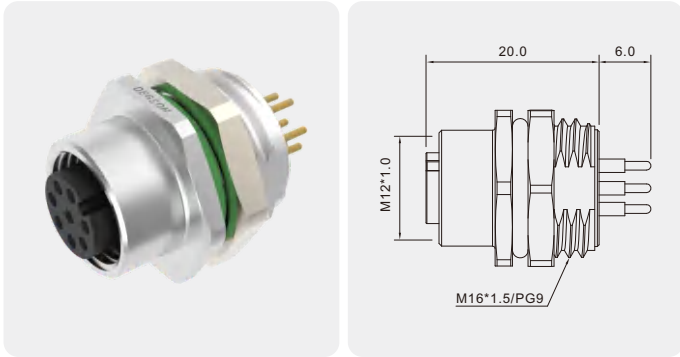


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	For Panel Thickness Max	4.5mm
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105℃	—	—
IP Class	IP68	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9		SP-M12A-10P-FF-SH8001-00AH	SP-M12A-12P-FF-SH8001-00AH	SP-M12A-17P-FF-SH8001-00AH	SP-M12B-05P-FF-SH8001-00AH	SP-M12D-04P-FF-SH8001-00AH
Customized						
M16*1.5		SP-M12A-10P-FF-SH8002-00AH	SP-M12A-12P-FF-SH8002-00AH	SP-M12A-17P-FF-SH8002-00AH	SP-M12B-05P-FF-SH8002-00AH	SP-M12D-04P-FF-SH8002-00AH
Customized						

Dimension Figure

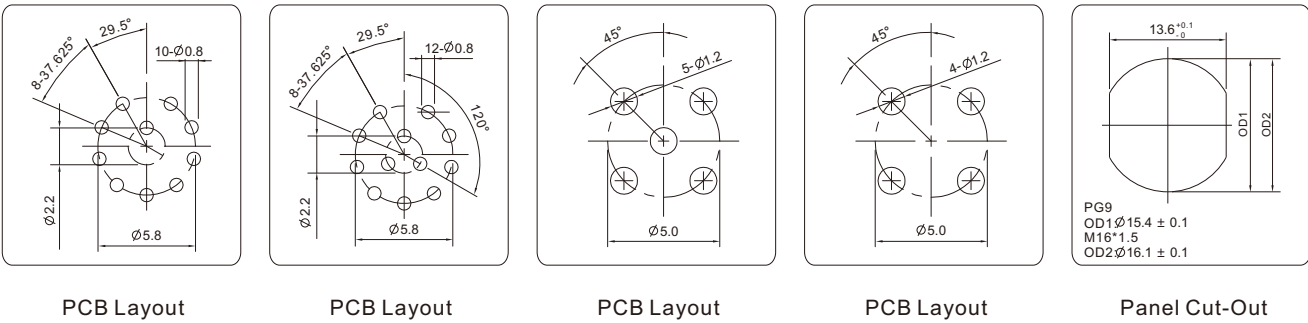

M12 x 1 Female Panel Mount Receptacle,
Rear Mounting,Shielded,PCB Soldering.

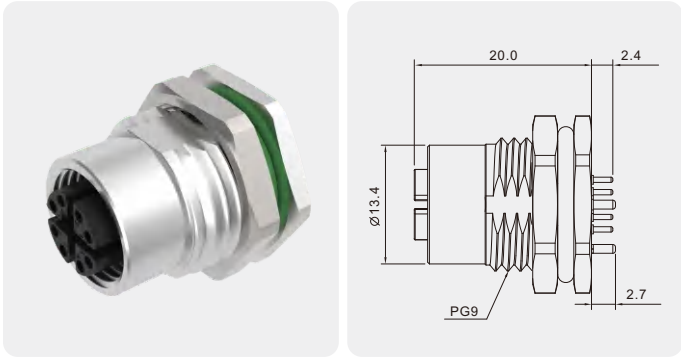


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy , Gold-plated
Number of Pins	08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	0.5A max.	Seal	Silicone
Rated voltage	50V AC / 60V DC	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	For Panel Thickness Max	4.5mm
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 20 ~ +105℃	—	—
IP Class	IP67	—	—

Number of Pins		08 Pin
Coding	Coded	X-Coded
	Front View	
Rated current	A.	0.5A
Rated voltage	V.	50V AC / 60V DC
Description		Order NO .
PG9		SPSH-M12X-08P-FF-SF7001-00AH
Customized		
M16*1.5		SPSH-M12X-08P-FF-SF7002-00AH
Customized		

Dimension Figure




PCB Layout



Panel Cut-Out

M12 x 1 Female Panel Mount Receptacle,
Rear Mounting,Shielded,PCB Soldering.

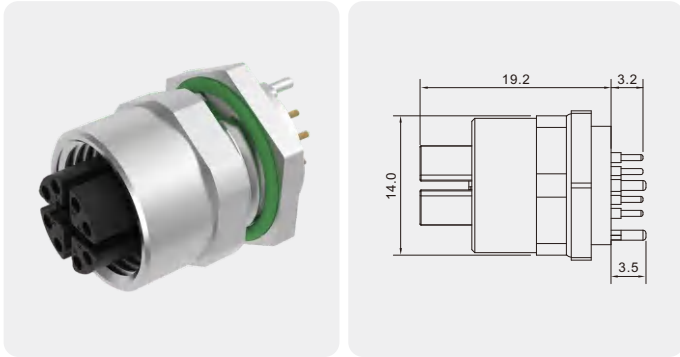


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy , Gold-plated
Number of Pins	08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	0.5A max.	Seal	Silicone
Rated voltage	50V AC / 60V DC	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	For Panel Thickness Max	4.5mm
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 20 ~ +105℃	—	—
IP Class	IP67	—	—

Number of Pins		08 Pin
Coding	Coded	X-Coded
	Front View	
Rated current	A.	0.5A
Rated voltage	V.	50V AC / 60V DC
Description		Order NO .
M12*1.0		SPSH-M12X-08P-FF-SF7003-00AH
Customized		

Dimension Figure




PCB Layout



Panel Cut-Out

M12 x 1 Male Panel Mount Receptacle, Rear Mounting,Unshielded,Soldering without wire.

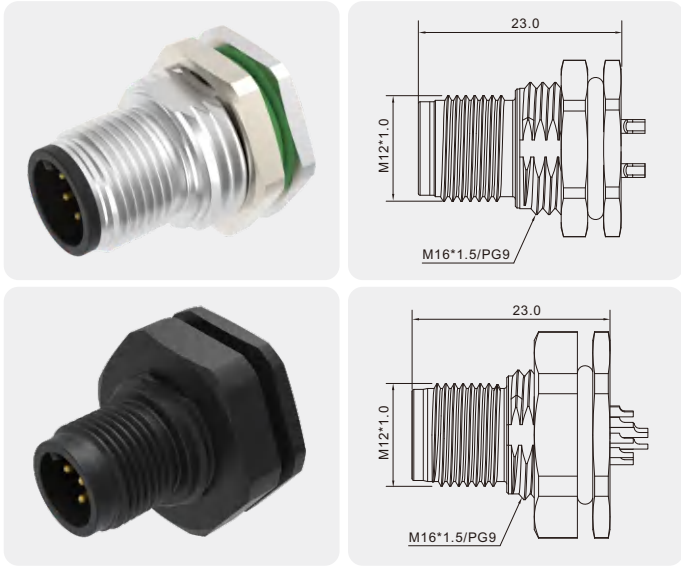


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	For Panel Thickness Max	4.5mm (Metal shell)
Ambient temperature	- 40 ~ +105°C (Metal shell) / -25~+80°C (Plastic shell)		3.0mm (Plastic shell)
IP Class	IP68	—	—


Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	SD-M12A-03P-MM-SF8001-00AH	SD-M12A-04P-MM-SF8001-00AH	SD-M12A-05P-MM-SF8001-00AH	SD-M12A-06P-MM-SF8001-00AH	SD-M12A-08P-MM-SF8001-00AH
	Plastic shell	SD-M12A-03P-MM-SF8007-00AH	SD-M12A-04P-MM-SF8007-00AH	SD-M12A-05P-MM-SF8007-00AH	SD-M12A-06P-MM-SF8007-00AH	SD-M12A-08P-MM-SF8007-00AH
	Customized					
M16*1.5	Metal shell	SD-M12A-03P-MM-SF8002-00AH	SD-M12A-04P-MM-SF8002-00AH	SD-M12A-05P-MM-SF8002-00AH	SD-M12A-06P-MM-SF8002-00AH	SD-M12A-08P-MM-SF8002-00AH
	Plastic shell	SD-M12A-03P-MM-SF8008-00AH	SD-M12A-04P-MM-SF8008-00AH	SD-M12A-05P-MM-SF8008-00AH	SD-M12A-06P-MM-SF8008-00AH	SD-M12A-08P-MM-SF8008-00AH
	Customized					

Dimension Figure



Panel Cut-Out

M12 x 1 Male Panel Mount Receptacle, Rear Mounting,Unshielded,Soldering without wire.

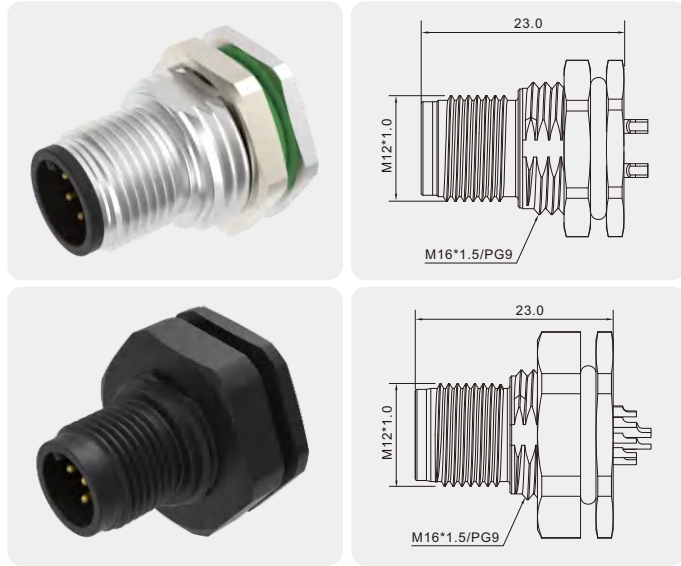


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	For Panel Thickness Max	4.5mm (Metal shell)
Ambient temperature	- 40 ~ +105°C (Metal shell) / -25~+80°C (Plastic shell)		3.0mm (Plastic shell)
IP Class	IP68	—	—


Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	SD-M12A-10P-MM-SF8001-00AH	SD-M12A-12P-MM-SF8001-00AH	SD-M12A-17P-MM-SF8001-00AH	SD-M12B-05P-MM-SF8001-00AH	SD-M12D-04P-MM-SF8001-00AH
	Plastic shell	SD-M12A-10P-MM-SF8007-00AH	SD-M12A-12P-MM-SF8007-00AH	SD-M12A-17P-MM-SF8007-00AH	SD-M12B-05P-MM-SF8007-00AH	SD-M12D-04P-MM-SF8007-00AH
	Customized					
M16*1.5	Metal shell	SD-M12A-10P-MM-SF8002-00AH	SD-M12A-12P-MM-SF8002-00AH	SD-M12A-17P-MM-SF8002-00AH	SD-M12B-05P-MM-SF8002-00AH	SD-M12D-04P-MM-SF8002-00AH
	Plastic shell	SD-M12A-10P-MM-SF8008-00AH	SD-M12A-12P-MM-SF8008-00AH	SD-M12A-17P-MM-SF8008-00AH	SD-M12B-05P-MM-SF8008-00AH	SD-M12D-04P-MM-SF8008-00AH
	Customized					

Dimension Figure



Panel Cut-Out

M12 x 1 Male Panel Mount Receptacle, Front Mounting,Unshielded,Soldering without wire.

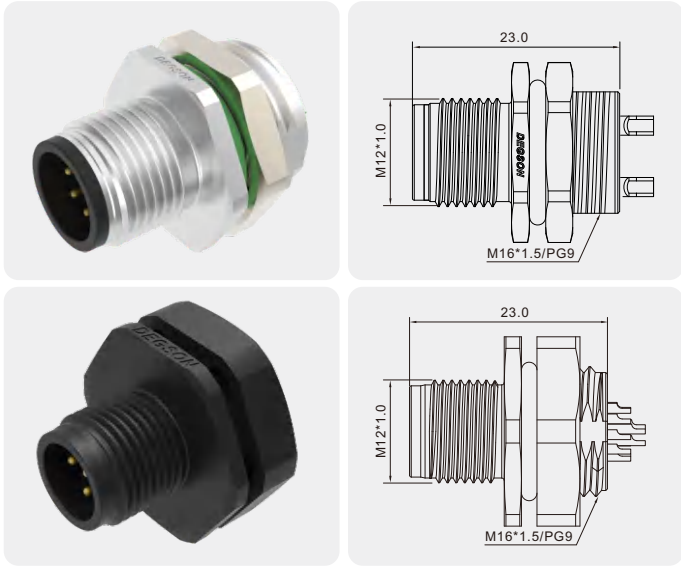


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	For Panel Thickness Max	4.5mm (Metal shell)
Ambient temperature	- 40 ~ + 105°C (Metal shell) / - 25 ~ + 80°C (Plastic shell)		3.0mm (Plastic shell)
IP Class	IP68		


Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	SD-M12A-03P-MM-SH8001-00AH	SD-M12A-04P-MM-SH8001-00AH	SD-M12A-05P-MM-SH8001-00AH	SD-M12A-06P-MM-SH8001-00AH	SD-M12A-08P-MM-SH8001-00AH
	Plastic shell	SD-M12A-03P-MM-SH8007-00AH	SD-M12A-04P-MM-SH8007-00AH	SD-M12A-05P-MM-SH8007-00AH	SD-M12A-06P-MM-SH8007-00AH	SD-M12A-08P-MM-SH8007-00AH
	Customized					
M16*1.5	Metal shell	SD-M12A-03P-MM-SH8002-00AH	SD-M12A-04P-MM-SH8002-00AH	SD-M12A-05P-MM-SH8002-00AH	SD-M12A-06P-MM-SH8002-00AH	SD-M12A-08P-MM-SH8002-00AH
	Plastic shell	SD-M12A-03P-MM-SH8008-00AH	SD-M12A-04P-MM-SH8008-00AH	SD-M12A-05P-MM-SH8008-00AH	SD-M12A-06P-MM-SH8008-00AH	SD-M12A-08P-MM-SH8008-00AH
	Customized					

Dimension Figure



Panel Cut-Out

M12 x 1 Male Panel Mount Receptacle, Front Mounting,Unshielded,Soldering without wire.

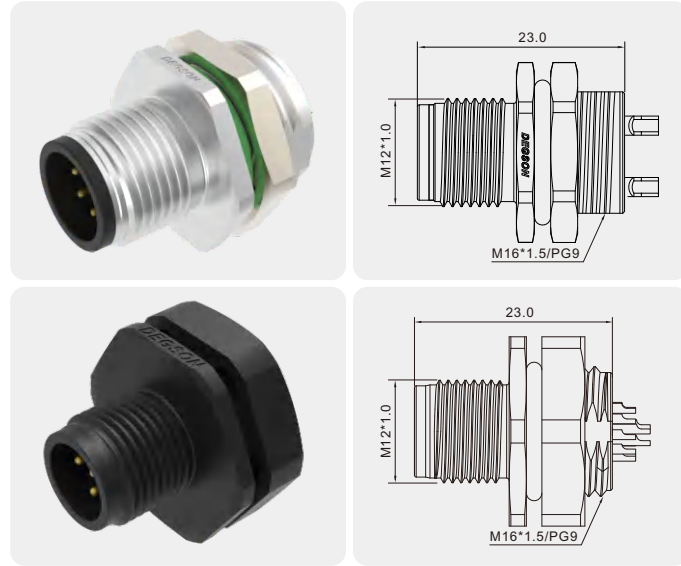


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	For Panel Thickness Max	4.5mm (Metal shell)
Ambient temperature	- 40 ~ + 105°C (Metal shell) / - 25 ~ + 80°C (Plastic shell)		3.0mm (Plastic shell)
IP Class	IP68		


Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	SD-M12A-10P-MM-SH8001-00AH	SD-M12A-12P-MM-SH8001-00AH	SD-M12A-17P-MM-SH8001-00AH	SD-M12B-05P-MM-SH8001-00AH	SD-M12D-04P-MM-SH8001-00AH
	Plastic shell	SD-M12A-10P-MM-SH8007-00AH	SD-M12A-12P-MM-SH8007-00AH	SD-M12A-17P-MM-SH8007-00AH	SD-M12B-05P-MM-SH8007-00AH	SD-M12D-04P-MM-SH8007-00AH
	Customized					
M16*1.5	Metal shell	SD-M12A-10P-MM-SH8002-00AH	SD-M12A-12P-MM-SH8002-00AH	SD-M12A-17P-MM-SH8002-00AH	SD-M12B-05P-MM-SH8002-00AH	SD-M12D-04P-MM-SH8002-00AH
	Plastic shell	SD-M12A-10P-MM-SH8008-00AH	SD-M12A-12P-MM-SH8008-00AH	SD-M12A-17P-MM-SH8008-00AH	SD-M12B-05P-MM-SH8008-00AH	SD-M12D-04P-MM-SH8008-00AH
	Customized					

Dimension Figure



Panel Cut-Out

M12 x 1 Female Panel Mount Receptacle, Rear Mounting, Unshielded, Soldering without wire.

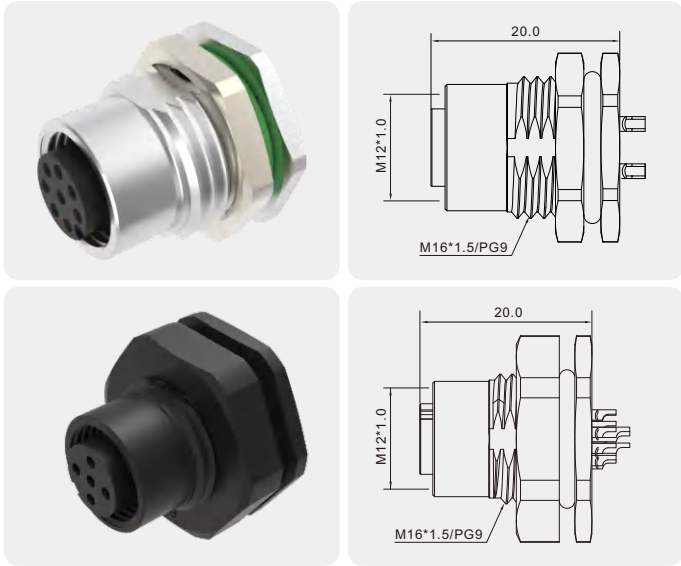


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	For Panel Thickness Max	4.5mm (Metal shell)
Ambient temperature	- 40 ~ + 105°C (Metal shell) / - 25 ~ + 80°C (Plastic shell)		3.0mm (Plastic shell)
IP Class	IP68		


Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	SD-M12A-03P-FF-SF8001-00AH	SD-M12A-04P-FF-SF8001-00AH	SD-M12A-05P-FF-SF8001-00AH	SD-M12A-06P-FF-SF8001-00AH	SD-M12A-08P-FF-SF8001-00AH
	Plastic shell	SD-M12A-03P-FF-SF8007-00AH	SD-M12A-04P-FF-SF8007-00AH	SD-M12A-05P-FF-SF8007-00AH	SD-M12A-06P-FF-SF8007-00AH	SD-M12A-08P-FF-SF8007-00AH
	Customized					
M16*1.5	Metal shell	SD-M12A-03P-FF-SF8002-00AH	SD-M12A-04P-FF-SF8002-00AH	SD-M12A-05P-FF-SF8002-00AH	SD-M12A-06P-FF-SF8002-00AH	SD-M12A-08P-FF-SF8002-00AH
	Plastic shell	SD-M12A-03P-FF-SF8008-00AH	SD-M12A-04P-FF-SF8008-00AH	SD-M12A-05P-FF-SF8008-00AH	SD-M12A-06P-FF-SF8008-00AH	SD-M12A-08P-FF-SF8008-00AH
	Customized					

Dimension Figure



Panel Cut-Out

M12 x 1 Female Panel Mount Receptacle, Rear Mounting, Unshielded, Soldering without wire.

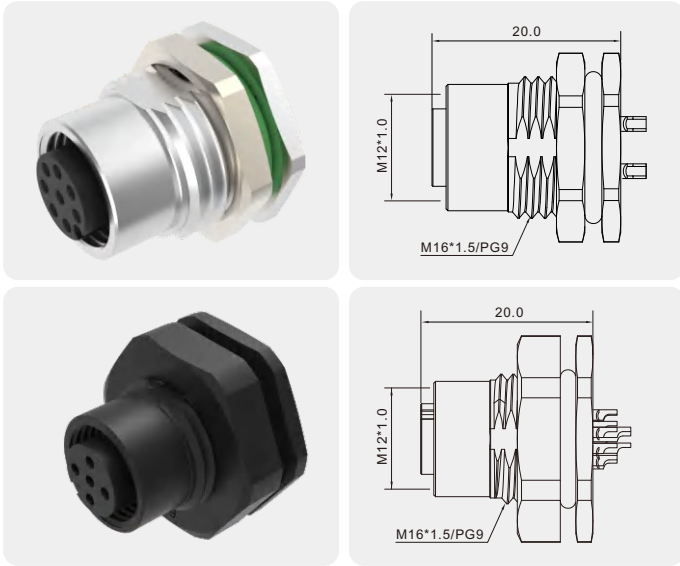


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	For Panel Thickness Max	4.5mm (Metal shell)
Ambient temperature	- 40 ~ + 105°C (Metal shell) / - 25 ~ + 80°C (Plastic shell)		3.0mm (Plastic shell)
IP Class	IP68		


Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	SD-M12A-10P-FF-SF8001-00AH	SD-M12A-12P-FF-SF8001-00AH	SD-M12A-17P-FF-SF8001-00AH	SD-M12B-05P-FF-SF8001-00AH	SD-M12D-04P-FF-SF8001-00AH
	Plastic shell	SD-M12A-10P-FF-SF8007-00AH	SD-M12A-12P-FF-SF8007-00AH	SD-M12A-17P-FF-SF8007-00AH	SD-M12B-05P-FF-SF8007-00AH	SD-M12D-04P-FF-SF8007-00AH
	Customized					
M16*1.5	Metal shell	SD-M12A-10P-FF-SF8002-00AH	SD-M12A-12P-FF-SF8002-00AH	SD-M12A-17P-FF-SF8002-00AH	SD-M12B-05P-FF-SF8002-00AH	SD-M12D-04P-FF-SF8002-00AH
	Plastic shell	SD-M12A-10P-FF-SF8008-00AH	SD-M12A-12P-FF-SF8008-00AH	SD-M12A-17P-FF-SF8008-00AH	SD-M12B-05P-FF-SF8008-00AH	SD-M12D-04P-FF-SF8008-00AH
	Customized					

Dimension Figure



Panel Cut-Out

M12 x 1 Female Panel Mount Receptacle, Front Mounting, Unshielded, Soldering without wire.

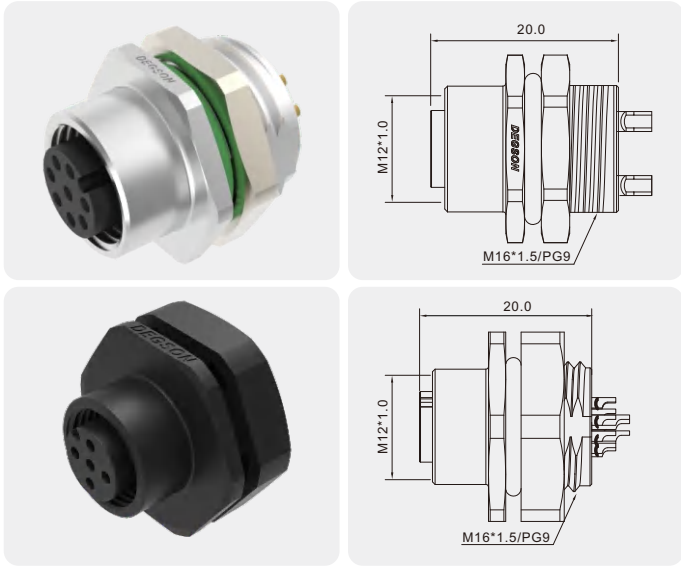


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	For Panel Thickness Max	4.5mm (Metal shell)
Ambient temperature	- 40 ~ + 105°C (Metal shell) / - 25 ~ + 80°C (Plastic shell)		3.0mm (Plastic shell)
IP Class	IP68		


Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	SD-M12A-03P-FF-SH8001-00AH	SD-M12A-04P-FF-SH8001-00AH	SD-M12A-05P-FF-SH8001-00AH	SD-M12A-06P-FF-SH8001-00AH	SD-M12A-08P-FF-SH8001-00AH
	Plastic shell	SD-M12A-03P-FF-SH8007-00AH	SD-M12A-04P-FF-SH8007-00AH	SD-M12A-05P-FF-SH8007-00AH	SD-M12A-06P-FF-SH8007-00AH	SD-M12A-08P-FF-SH8007-00AH
	Customized					
M16*1.5	Metal shell	SD-M12A-03P-FF-SH8002-00AH	SD-M12A-04P-FF-SH8002-00AH	SD-M12A-05P-FF-SH8002-00AH	SD-M12A-06P-FF-SH8002-00AH	SD-M12A-08P-FF-SH8002-00AH
	Plastic shell	SD-M12A-03P-FF-SH8002-00AH	SD-M12A-04P-FF-SH8008-00AH	SD-M12A-05P-FF-SH8008-00AH	SD-M12A-06P-FF-SH8008-00AH	SD-M12A-08P-FF-SH8008-00AH
	Customized					

Dimension Figure



Panel Cut-Out

M12 x 1 Female Panel Mount Receptacle, Front Mounting, Unshielded, Soldering without wire.

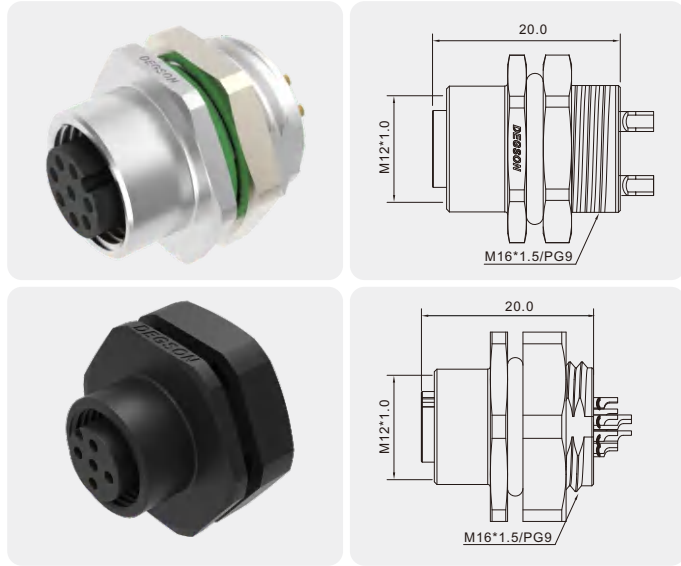


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal shell	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic shell	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	For Panel Thickness Max	4.5mm (Metal shell)
Ambient temperature	- 40 ~ + 105°C (Metal shell) / - 25 ~ + 80°C (Plastic shell)		3.0mm (Plastic shell)
IP Class	IP68		


Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
PG9	Metal shell	SD-M12A-10P-FF-SH8001-00AH	SD-M12A-12P-FF-SH8001-00AH	SD-M12A-17P-FF-SH8001-00AH	SD-M12B-05P-FF-SH8001-00AH	SD-M12D-04P-FF-SH8001-00AH
	Plastic shell	SD-M12A-10P-FF-SH8007-00AH	SD-M12A-12P-FF-SH8007-00AH	SD-M12A-17P-FF-SH8007-00AH	SD-M12B-05P-FF-SH8007-00AH	SD-M12D-04P-FF-SH8007-00AH
	Customized					
M16*1.5	Metal shell	SD-M12A-10P-FF-SH8002-00AH	SD-M12A-12P-FF-SH8002-00AH	SD-M12A-17P-FF-SH8002-00AH	SD-M12B-05P-FF-SH8002-00AH	SD-M12D-04P-FF-SH8002-00AH
	Plastic shell	SD-M12A-10P-FF-SH8008-00AH	SD-M12A-12P-FF-SH8008-00AH	SD-M12A-17P-FF-SH8008-00AH	SD-M12B-05P-FF-SH8008-00AH	SD-M12D-04P-FF-SH8008-00AH
	Customized					

Dimension Figure



Panel Cut-Out

M12 x 1 Male Panel Mount Receptacle,
Rear Mounting,Unshielded,PCB Soldering.

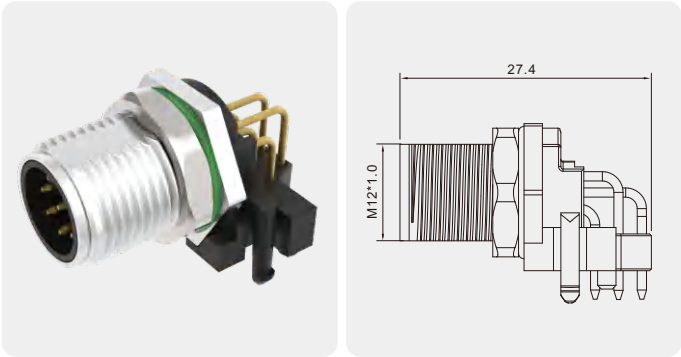


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	For Panel Thickness Max	4.5mm
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105°C	—	—
IP Class	IP67	—	—

Number of Pins		04 Pin		05 Pin		08 Pin
Coding	Coded	A-Coded	D-Coded	A-Coded	B-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	4A	2A
Rated voltage	V.	250V	250V	60V	60V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
M12*1.0		SR-M12A-04P-MM-SF7003-00AH	SR-M12D-04P-MM-SF7003-00AH	SR-M12A-05P-MM-SF7003-00AH	SR-M12B-05P-MM-SF7003-00AH	SR-M12A-08P-MM-SF7003-00AH
Customized		*****	*****	*****	*****	*****

Dimension Figure

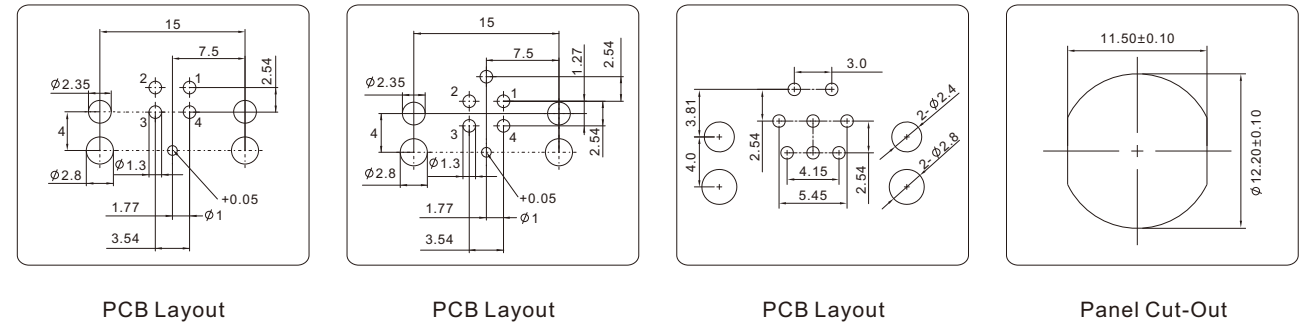

M12 x 1 Female Panel Mount Receptacle,
Rear Mounting,Unshielded,PCB Soldering.

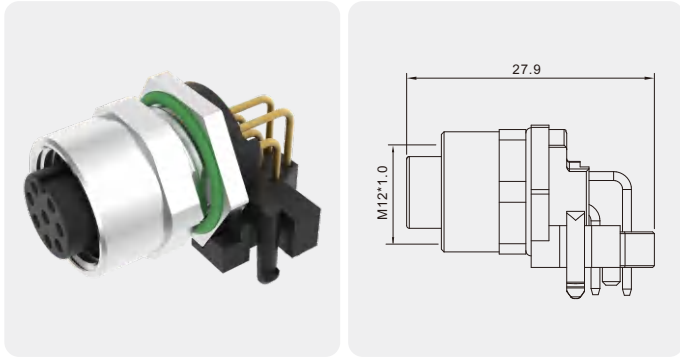


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Mechanical life	> 100 mating cycles
Insulation resistance	≥100MΩ	For Panel Thickness Max	4.5mm
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +105°C	—	—
IP Class	IP67	—	—

Number of Pins		04 Pin		05 Pin		08 Pin
Coding	Coded	A-Coded	D-Coded	A-Coded	B-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	4A	2A
Rated voltage	V.	250V	250V	60V	60V	30V
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
M12*1.0		SR-M12A-04P-FF-SF7003-00AH	SR-M12D-04P-FF-SF7003-00AH	SR-M12A-05P-FF-SF7003-00AH	SR-M12B-05P-FF-SF7003-00AH	SR-M12A-08P-FF-SF7003-00AH
Customized		*****	*****	*****	*****	*****

Dimension Figure

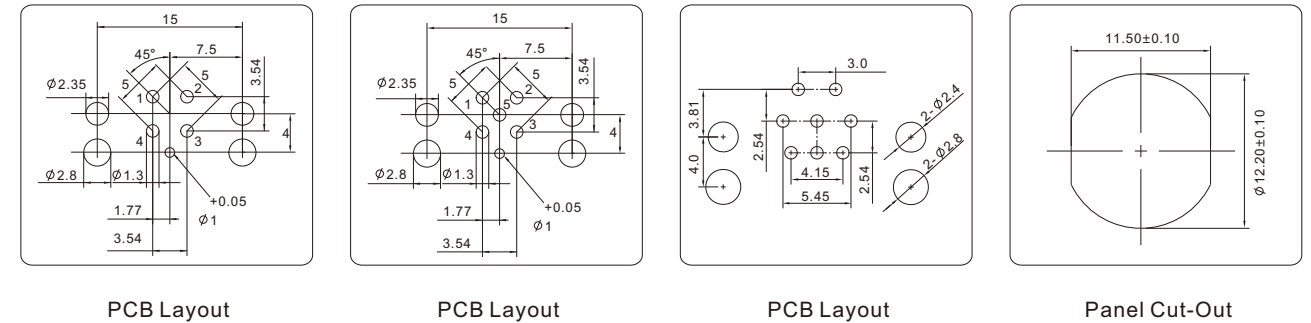

M12 x 1 Male Field
Assembly Plug,
Unshielded,Screw
Connection,Straight.




Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin		05 Pin		06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	D-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View							
Rated current	A.	4A	4A	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	250V	60V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Metal of nut		PB-M12A-03P-MM-SL7001-00AH	PB-M12A-04P-MM-SL7001-00AH	PB-M12D-04P-MM-SL7001-00AH	PB-M12A-05P-MM-SL7001-00AH	PB-M12B-05P-MM-SL7001-00AH	PB-M12A-06P-MM-SL7001-00AH	PB-M12A-08P-MM-SL7001-00AH
Plastic of nut		PW-M12A-03P-MM-SL7001-00AH	PW-M12A-04P-MM-SL7001-00AH	PW-M12D-04P-MM-SL7001-00AH	PW-M12A-05P-MM-SL7001-00AH	PW-M12B-05P-MM-SL7001-00AH	PW-M12A-06P-MM-SL7001-00AH	PW-M12A-08P-MM-SL7001-00AH

Component part drawing

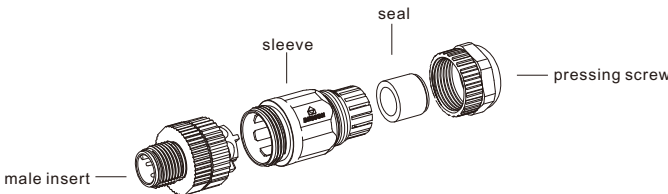

M12 x 1 Female Field
Assembly Plug,
Unshielded,Screw
Connection,Straight.




Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin		05 Pin		06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	D-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View							
Rated current	A.	4A	4A	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	250V	60V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Metal of nut		PB-M12A-03P-FF-SL7001-00AH	PB-M12A-04P-FF-SL7001-00AH	PB-M12D-04P-FF-SL7001-00AH	PB-M12A-05P-FF-SL7001-00AH	PB-M12B-05P-FF-SL7001-00AH	PB-M12A-06P-FF-SL7001-00AH	PB-M12A-08P-FF-SL7001-00AH
Plastic of nut		PW-M12A-03P-FF-SL7001-00AH	PW-M12A-04P-FF-SL7001-00AH	PW-M12D-04P-FF-SL7001-00AH	PW-M12A-05P-FF-SL7001-00AH	PW-M12B-05P-FF-SL7001-00AH	PW-M12A-06P-FF-SL7001-00AH	PW-M12A-08P-FF-SL7001-00AH

Component part drawing

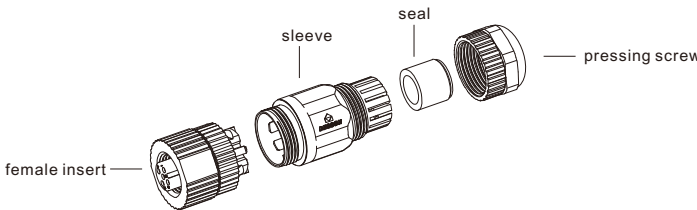

M12 x 1 Male Field
Assembly Plug,
Unshielded,Screw
Connection,Angled.

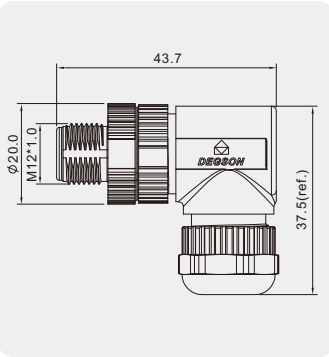


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin		05 Pin		06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	D-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View							
Rated current	A.	4A	4A	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	250V	60V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Metal of nut		PB-M12A-03P-MM-SR7001-00AH	PB-M12A-04P-MM-SR7001-00AH	PB-M12D-04P-MM-SR7001-00AH	PB-M12A-05P-MM-SR7001-00AH	PB-M12B-05P-MM-SR7001-00AH	PB-M12A-06P-MM-SR7001-00AH	PB-M12A-08P-MM-SR7001-00AH
Plastic of nut		PW-M12A-03P-MM-SR7001-00AH	PW-M12A-04P-MM-SR7001-00AH	PW-M12D-04P-MM-SR7001-00AH	PW-M12A-05P-MM-SR7001-00AH	PW-M12B-05P-MM-SR7001-00AH	PW-M12A-06P-MM-SR7001-00AH	PW-M12A-08P-MM-SR7001-00AH

Component part drawing

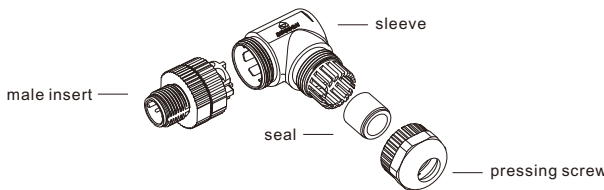

M12 x 1 Female Field
Assembly Plug,
Unshielded,Screw
Connection,Angled.

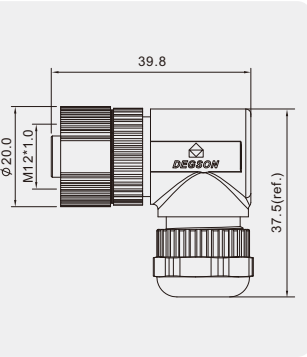


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin		05 Pin		06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	D-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View							
Rated current	A.	4A	4A	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	250V	60V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Metal of nut		PB-M12A-03P-FF-SR7001-00AH	PB-M12A-04P-FF-SR7001-00AH	PB-M12D-04P-FF-SR7001-00AH	PB-M12A-05P-FF-SR7001-00AH	PB-M12B-05P-FF-SR7001-00AH	PB-M12A-06P-FF-SR7001-00AH	PB-M12A-08P-FF-SR7001-00AH
Plastic of nut		PW-M12A-03P-FF-SR7001-00AH	PW-M12A-04P-FF-SR7001-00AH	PW-M12D-04P-FF-SR7001-00AH	PW-M12A-05P-FF-SR7001-00AH	PW-M12B-05P-FF-SR7001-00AH	PW-M12A-06P-FF-SR7001-00AH	PW-M12A-08P-FF-SR7001-00AH

Component part drawing

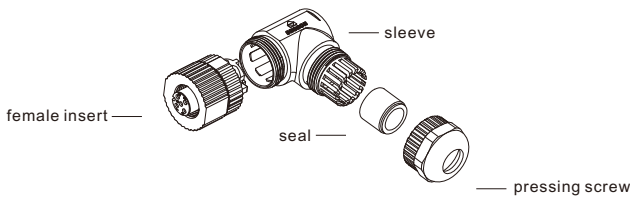

M12 x 1 Male Field Assembly
Plug,Shielded,Screw Connection,
Straight.

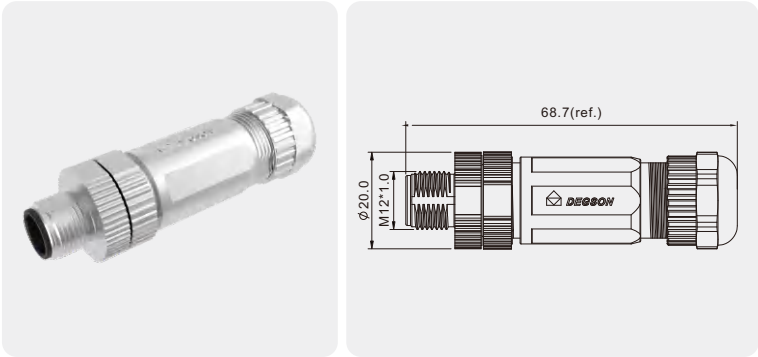


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ +105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin		05 Pin		06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	D-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View							
Rated current	A.	4A	4A	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	250V	60V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Cable OD : 4.5-6.0mm		PBSH-M12A-03P-MM-SL7001-00AH	PBSH-M12A-04P-MM-SL7001-00AH	PBSH-M12D-04P-MM-SL7001-00AH	PBSH-M12A-05P-MM-SL7001-00AH	PBSH-M12B-05P-MM-SL7001-00AH	PBSH-M12A-06P-MM-SL7001-00AH	PBSH-M12A-08P-MM-SL7001-00AH
Cable OD : 6.0-7.5mm		PBSH-M12A-03P-MM-SL7002-00AH	PBSH-M12A-04P-MM-SL7002-00AH	PBSH-M12D-04P-MM-SL7002-00AH	PBSH-M12A-05P-MM-SL7002-00AH	PBSH-M12B-05P-MM-SL7002-00AH	PBSH-M12A-06P-MM-SL7002-00AH	PBSH-M12A-08P-MM-SL7002-00AH

Component part drawing

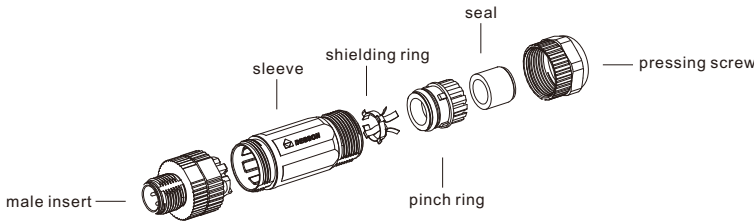

M12 x 1 Female Field Assembly
Plug,Shielded,Screw Connection,
Straight.

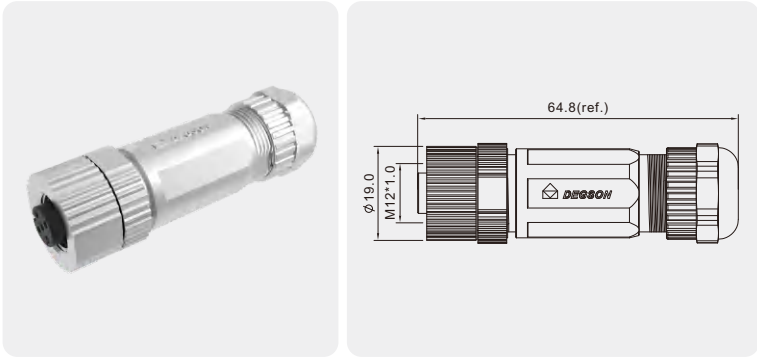


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ +105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin		05 Pin		06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	D-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View							
Rated current	A.	4A	4A	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	250V	60V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Cable OD : 4.5-6.0mm		PBSH-M12A-03P-FF-SL7001-00AH	PBSH-M12A-04P-FF-SL7001-00AH	PBSH-M12D-04P-FF-SL7001-00AH	PBSH-M12A-05P-FF-SL7001-00AH	PBSH-M12B-05P-FF-SL7001-00AH	PBSH-M12A-06P-FF-SL7001-00AH	PBSH-M12A-08P-FF-SL7001-00AH
Cable OD : 6.0-7.5mm		PBSH-M12A-03P-FF-SL7002-00AH	PBSH-M12A-04P-FF-SL7002-00AH	PBSH-M12D-04P-FF-SL7002-00AH	PBSH-M12A-05P-FF-SL7002-00AH	PBSH-M12B-05P-FF-SL7002-00AH	PBSH-M12A-06P-FF-SL7002-00AH	PBSH-M12A-08P-FF-SL7002-00AH

Component part drawing

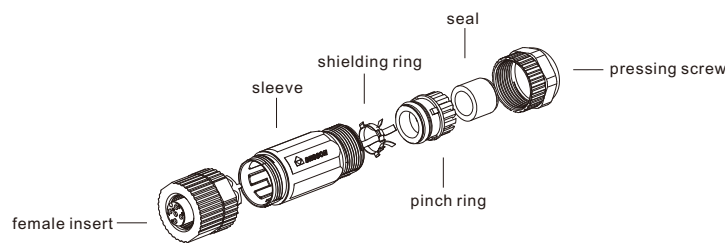

M12 x 1 Male Field Assembly Plug, Shielded, Screw Connection, Angled.

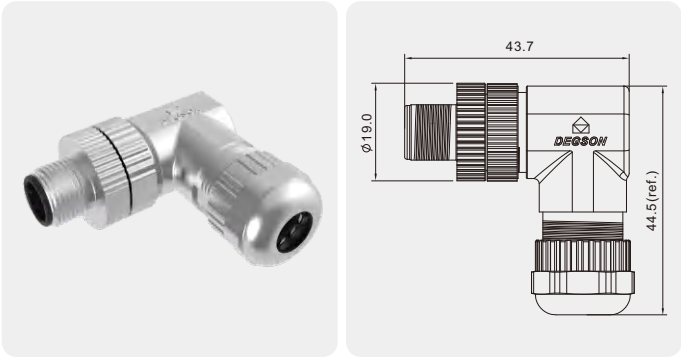


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin		05 Pin		06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	D-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View							
Rated current	A.	4A	4A	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	250V	60V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Cable OD : 4.5-6.0mm		PBSH-M12A-03P-MM-SR7001-00AH	PBSH-M12A-04P-MM-SR7001-00AH	PBSH-M12D-04P-MM-SR7001-00AH	PBSH-M12A-05P-MM-SR7001-00AH	PBSH-M12B-05P-MM-SR7001-00AH	PBSH-M12A-06P-MM-SR7001-00AH	PBSH-M12A-08P-MM-SR7001-00AH
Cable OD : 6.0-7.5mm		PBSH-M12A-03P-MM-SR7002-00AH	PBSH-M12A-04P-MM-SR7002-00AH	PBSH-M12D-04P-MM-SR7002-00AH	PBSH-M12A-05P-MM-SR7002-00AH	PBSH-M12B-05P-MM-SR7002-00AH	PBSH-M12A-06P-MM-SR7002-00AH	PBSH-M12A-08P-MM-SR7002-00AH

Component part drawing

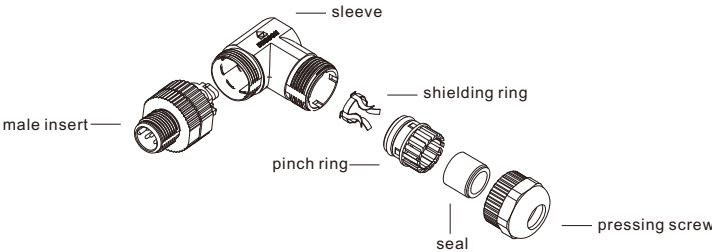

M12 x 1 Female Field Assembly Plug, Shielded, Screw Connection, Angled.

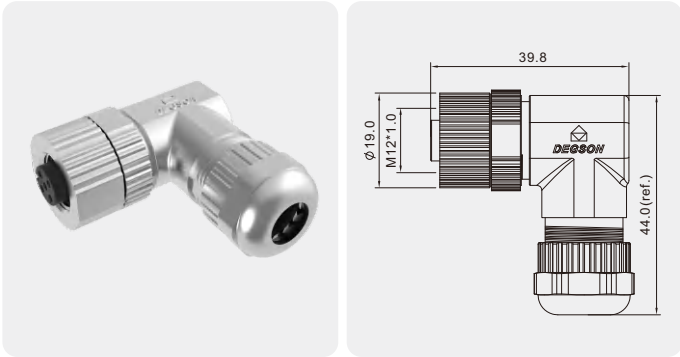


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin		05 Pin		06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	D-Coded	A-Coded	B-Coded	A-Coded	A-Coded
	Front View							
Rated current	A.	4A	4A	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	250V	60V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Cable OD : 4.5-6.0mm		PBSH-M12A-03P-FF-SR7001-00AH	PBSH-M12A-04P-FF-SR7001-00AH	PBSH-M12D-04P-FF-SR7001-00AH	PBSH-M12A-05P-FF-SR7001-00AH	PBSH-M12B-05P-FF-SR7001-00AH	PBSH-M12A-06P-FF-SR7001-00AH	PBSH-M12A-08P-FF-SR7001-00AH
Cable OD : 6.0-7.5mm		PBSH-M12A-03P-FF-SR7002-00AH	PBSH-M12A-04P-FF-SR7002-00AH	PBSH-M12D-04P-FF-SR7002-00AH	PBSH-M12A-05P-FF-SR7002-00AH	PBSH-M12B-05P-FF-SR7002-00AH	PBSH-M12A-06P-FF-SR7002-00AH	PBSH-M12A-08P-FF-SR7002-00AH

Component part drawing

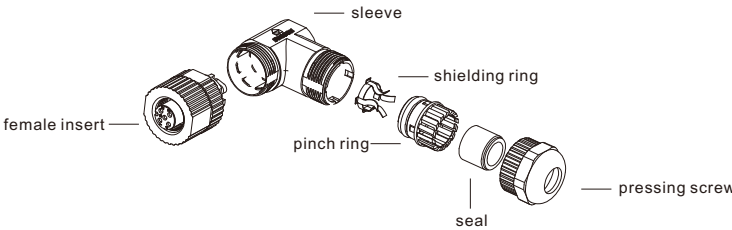

M12 x 1 Male Field
Assembly Plug,
Unshielded,Soldering
Connection, Straight.




Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Metal of nut		PA-M12A-03P-MM-SL7001-00AH	PA-M12A-04P-MM-SL7001-00AH	PA-M12A-05P-MM-SL7001-00AH	PA-M12A-06P-MM-SL7001-00AH	PA-M12A-08P-MM-SL7001-00AH
Plastic of nut		PS-M12A-03P-MM-SL7001-00AH	PS-M12A-04P-MM-SL7001-00AH	PS-M12A-05P-MM-SL7001-00AH	PS-M12A-06P-MM-SL7001-00AH	PS-M12A-08P-MM-SL7001-00AH

Component part drawing

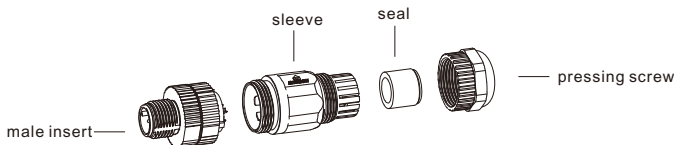

M12 x 1 Male Field
Assembly Plug,
Unshielded,Soldering
Connection, Straight.




Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Metal of nut		PA-M12A-10P-MM-SL7001-00AH	PA-M12A-12P-MM-SL7001-00AH	PA-M12A-17P-MM-SL7001-00AH	PA-M12B-05P-MM-SL7001-00AH	PA-M12D-04P-MM-SL7001-00AH
Plastic of nut		PS-M12A-10P-MM-SL7001-00AH	PS-M12A-12P-MM-SL7001-00AH	PS-M12A-17P-MM-SL7001-00AH	PS-M12B-05P-MM-SL7001-00AH	PS-M12D-04P-MM-SL7001-00AH

Component part drawing

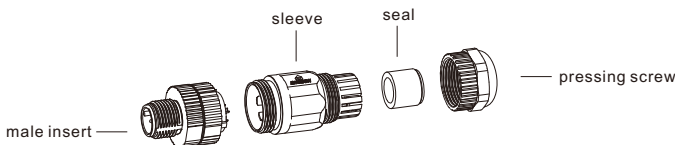

M12 x 1 Female Field
Assembly Plug,
Unshielded,Soldering
Connection,Straight.




Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ +105℃	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Metal of nut		PA-M12A-03P-FF-SL7001-00AH	PA-M12A-04P-FF-SL7001-00AH	PA-M12A-05P-FF-SL7001-00AH	PA-M12A-06P-FF-SL7001-00AH	PA-M12A-08P-FF-SL7001-00AH
Plastic of nut		PS-M12A-03P-FF-SL7001-00AH	PS-M12A-04P-FF-SL7001-00AH	PS-M12A-05P-FF-SL7001-00AH	PS-M12A-06P-FF-SL7001-00AH	PS-M12A-08P-FF-SL7001-00AH

Component part drawing

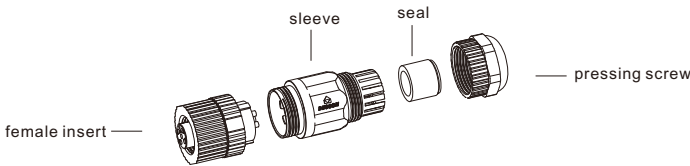

M12 x 1 Female Field
Assembly Plug,
Unshielded,Soldering
Connection,Straight.




Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ +105℃	—	—
IP Class	IP67	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Metal of nut		PA-M12A-10P-FF-SL7001-00AH	PA-M12A-12P-FF-SL7001-00AH	PA-M12A-17P-FF-SL7001-00AH	PA-M12B-05P-FF-SL7001-00AH	PA-M12D-04P-FF-SL7001-00AH
Plastic of nut		PS-M12A-10P-FF-SL7001-00AH	PS-M12A-12P-FF-SL7001-00AH	PS-M12A-17P-FF-SL7001-00AH	PS-M12B-05P-FF-SL7001-00AH	PS-M12D-04P-FF-SL7001-00AH

Component part drawing

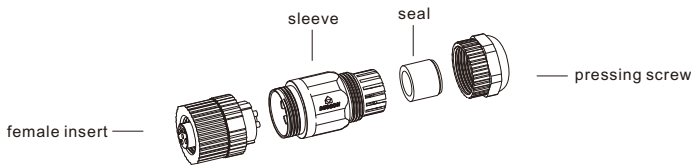

M12 x 1 Male Field
Assembly Plug,
Unshielded,Soldering
Connection,Angled.




Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Metal of nut		PA-M12A-03P-MM-SR7001-00AH	PA-M12A-04P-MM-SR7001-00AH	PA-M12A-05P-MM-SR7001-00AH	PA-M12A-06P-MM-SR7001-00AH	PA-M12A-08P-MM-SR7001-00AH
Plastic of nut		PS-M12A-03P-MM-SR7001-00AH	PS-M12A-04P-MM-SR7001-00AH	PS-M12A-05P-MM-SR7001-00AH	PS-M12A-06P-MM-SR7001-00AH	PS-M12A-08P-MM-SR7001-00AH

Component part drawing

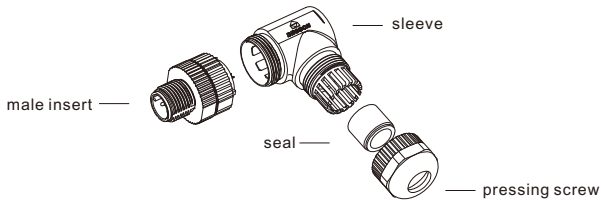

M12 x 1 Male Field
Assembly Plug,
Unshielded,Soldering
Connection,Angled.




Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Metal of nut		PA-M12A-10P-MM-SR7001-00AH	PA-M12A-12P-MM-SR7001-00AH	PA-M12A-17P-MM-SR7001-00AH	PA-M12B-05P-MM-SR7001-00AH	PA-M12D-04P-MM-SR7001-00AH
Plastic of nut		PS-M12A-10P-MM-SR7001-00AH	PS-M12A-12P-MM-SR7001-00AH	PS-M12A-17P-MM-SR7001-00AH	PS-M12B-05P-MM-SR7001-00AH	PS-M12D-04P-MM-SR7001-00AH

Component part drawing

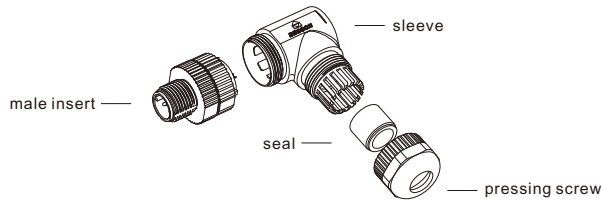

M12 x 1 Female Field
Assembly Plug,
Unshielded,Soldering
Connection,Angled.

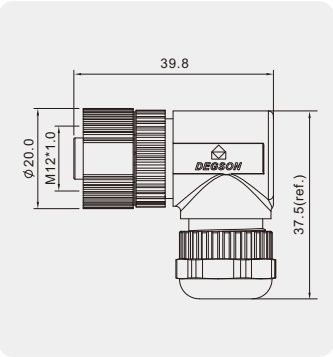


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Metal of nut		PA-M12A-03P-FF-SR7001-00AH	PA-M12A-04P-FF-SR7001-00AH	PA-M12A-05P-FF-SR7001-00AH	PA-M12A-06P-FF-SR7001-00AH	PA-M12A-08P-FF-SR7001-00AH
Plastic of nut		PS-M12A-03P-FF-SR7001-00AH	PS-M12A-04P-FF-SR7001-00AH	PS-M12A-05P-FF-SR7001-00AH	PS-M12A-06P-FF-SR7001-00AH	PS-M12A-08P-FF-SR7001-00AH

Component part drawing

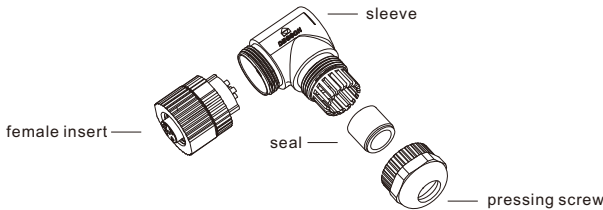

M12 x 1 Female Field
Assembly Plug,
Unshielded,Soldering
Connection,Angled.

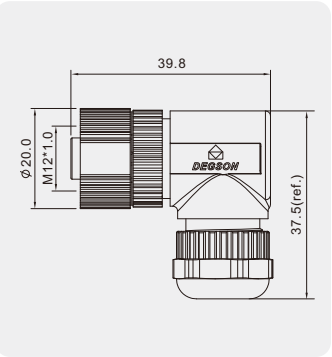


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Plastic of nut	PA
Rated voltage	250V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Metal of nut		PA-M12A-10P-FF-SR7001-00AH	PA-M12A-12P-FF-SR7001-00AH	PA-M12A-17P-FF-SR7001-00AH	PA-M12B-05P-FF-SR7001-00AH	PA-M12D-04P-FF-SR7001-00AH
Plastic of nut		PS-M12A-10P-FF-SR7001-00AH	PS-M12A-12P-FF-SR7001-00AH	PS-M12A-17P-FF-SR7001-00AH	PS-M12B-05P-FF-SR7001-00AH	PS-M12D-04P-FF-SR7001-00AH

Component part drawing

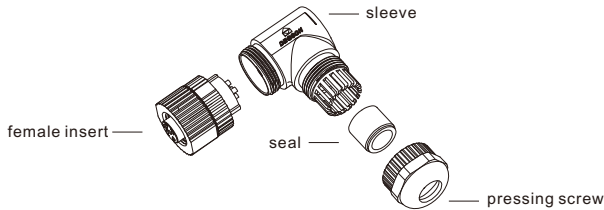

M12 x 1 Male Field Assembly Plug, Shielded, Soldering Connection, Straight.

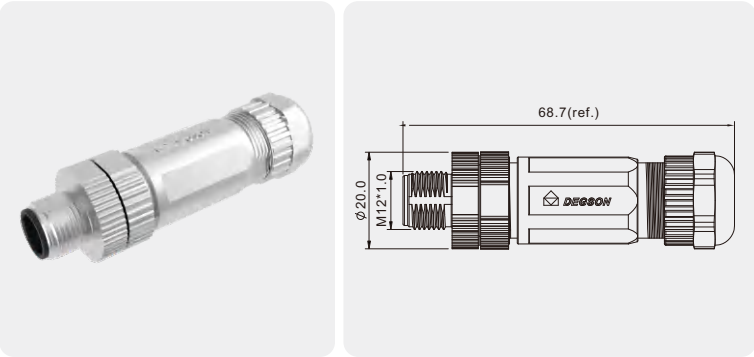


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Cable OD : 4.5-6.0mm		PASH-M12A-03P-MM-SL7001-00AH	PASH-M12A-04P-MM-SL7001-00AH	PASH-M12A-05P-MM-SL7001-00AH	PASH-M12A-06P-MM-SL7001-00AH	PASH-M12A-08P-MM-SL7001-00AH
Cable OD : 6.0-7.5mm		PASH-M12A-03P-MM-SL7002-00AH	PASH-M12A-04P-MM-SL7002-00AH	PASH-M12A-05P-MM-SL7002-00AH	PASH-M12A-06P-MM-SL7002-00AH	PASH-M12A-08P-MM-SL7002-00AH

Component part drawing

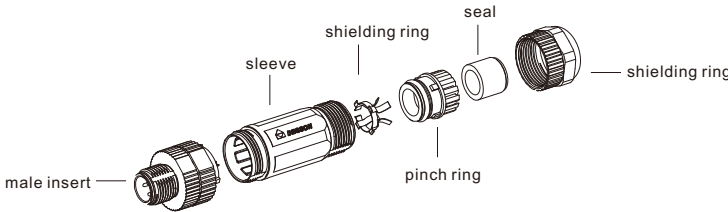

M12 x 1 Male Field Assembly Plug, Shielded, Soldering Connection, Straight.

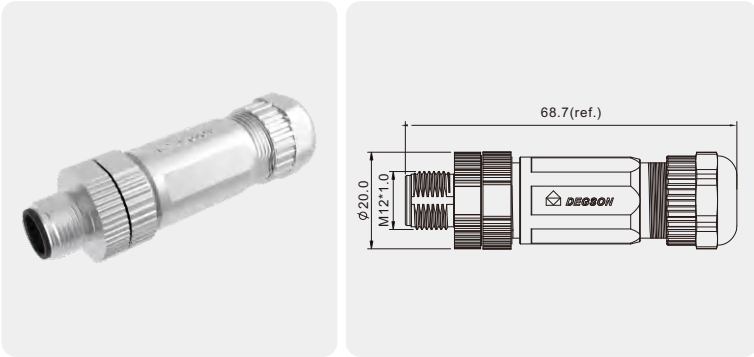


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Cable OD : 4.5-6.0mm		PASH-M12A-10P-MM-SL7001-00AH	PASH-M12A-12P-MM-SL7001-00AH	PASH-M12A-17P-MM-SL7001-00AH	PASH-M12B-05P-MM-SL7001-00AH	PASH-M12D-04P-MM-SL7001-00AH
Cable OD : 6.0-7.5mm		PASH-M12A-10P-MM-SL7002-00AH	PASH-M12A-12P-MM-SL7002-00AH	PASH-M12A-17P-MM-SL7002-00AH	PASH-M12B-05P-MM-SL7002-00AH	PASH-M12D-04P-MM-SL7002-00AH

Component part drawing

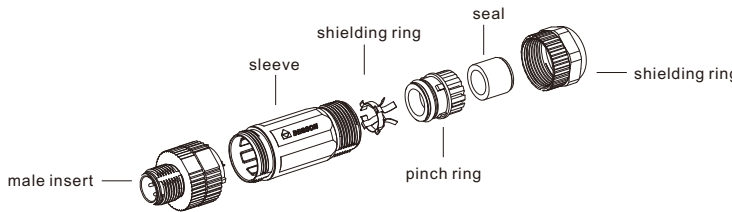

M12 x 1 Female Field Assembly Plug, Shielded,Soldering Connection, Straight.

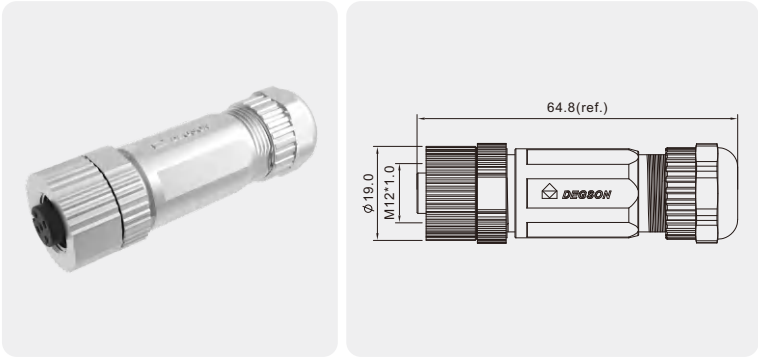


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ +105℃	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Cable OD : 4.5-6.0mm		PASH-M12A-03P-FF-SL7001-00AH	PASH-M12A-04P-FF-SL7001-00AH	PASH-M12A-05P-FF-SL7001-00AH	PASH-M12A-06P-FF-SL7001-00AH	PASH-M12A-08P-FF-SL7001-00AH
Cable OD : 6.0-7.5mm		PASH-M12A-03P-FF-SL7002-00AH	PASH-M12A-04P-FF-SL7002-00AH	PASH-M12A-05P-FF-SL7002-00AH	PASH-M12A-06P-FF-SL7002-00AH	PASH-M12A-08P-FF-SL7002-00AH

Component part drawing

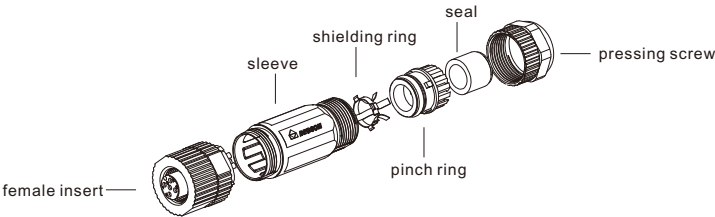

M12 x 1 Female Field Assembly Plug, Shielded,Soldering Connection, Straight.

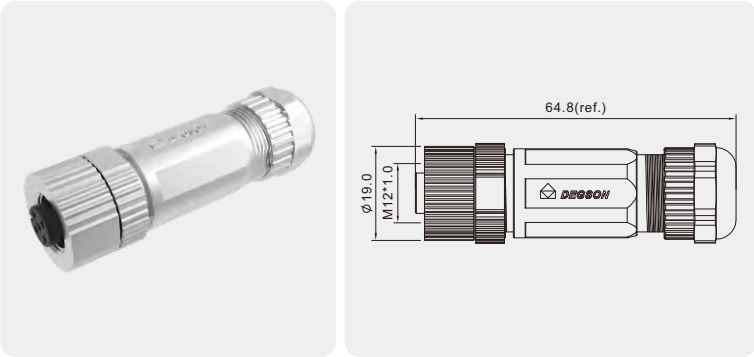


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ +105℃	—	—
IP Class	IP67	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Cable OD : 4.5-6.0mm		PASH-M12A-10P-FF-SL7001-00AH	PASH-M12A-12P-FF-SL7001-00AH	PASH-M12A-17P-FF-SL7001-00AH	PASH-M12B-05P-FF-SL7001-00AH	PASH-M12D-04P-FF-SL7001-00AH
Cable OD : 6.0-7.5mm		PASH-M12A-10P-FF-SL7002-00AH	PASH-M12A-12P-FF-SL7002-00AH	PASH-M12A-17P-FF-SL7002-00AH	PASH-M12B-05P-FF-SL7002-00AH	PASH-M12D-04P-FF-SL7002-00AH

Component part drawing

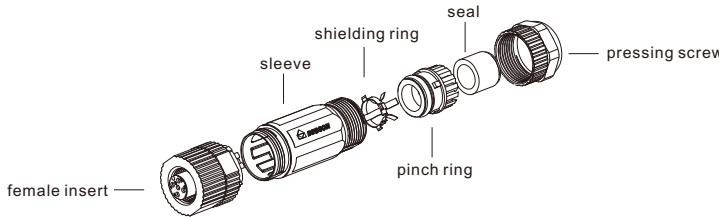

M12 x 1 Male Field Assembly Plug,
Shielded,Soldering Connection,
Angled.

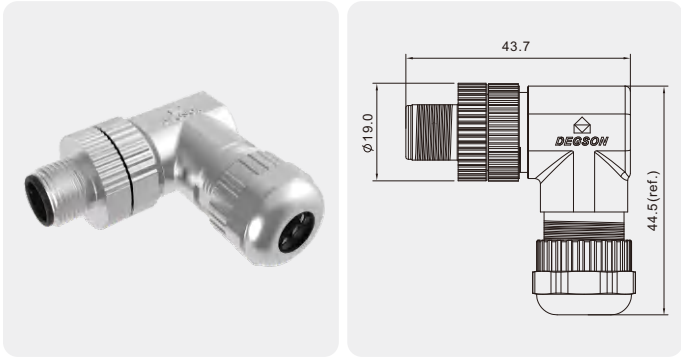


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Cable OD : 4.5-6.0mm		PASH-M12A-03P-MM-SR7001-00AH	PASH-M12A-04P-MM-SR7001-00AH	PASH-M12A-05P-MM-SR7001-00AH	PASH-M12A-06P-MM-SR7001-00AH	PASH-M12A-08P-MM-SR7001-00AH
Cable OD : 6.0-7.5mm		PASH-M12A-03P-MM-SR7002-00AH	PASH-M12A-04P-MM-SR7002-00AH	PASH-M12A-05P-MM-SR7002-00AH	PASH-M12A-06P-MM-SR7002-00AH	PASH-M12A-08P-MM-SR7002-00AH

Component part drawing

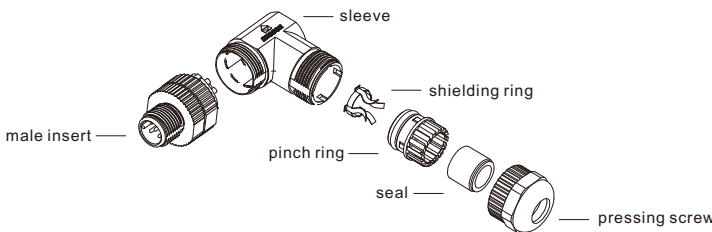

M12 x 1 Male Field Assembly Plug,
Shielded,Soldering Connection,
Angled.

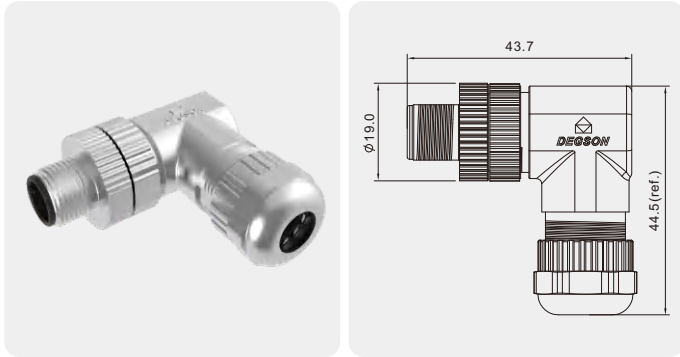


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Male	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Cable OD : 4.5-6.0mm		PASH-M12A-10P-MM-SR7001-00AH	PASH-M12A-12P-MM-SR7001-00AH	PASH-M12A-17P-MM-SR7001-00AH	PASH-M12B-05P-MM-SR7001-00AH	PASH-M12D-04P-MM-SR7001-00AH
Cable OD : 6.0-7.5mm		PASH-M12A-10P-MM-SR7002-00AH	PASH-M12A-12P-MM-SR7002-00AH	PASH-M12A-17P-MM-SR7002-00AH	PASH-M12B-05P-MM-SR7002-00AH	PASH-M12D-04P-MM-SR7002-00AH

Component part drawing

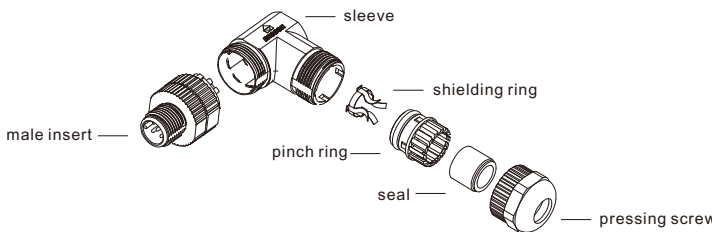

M12 x 1 Female Field Assembly Plug,
Shielded,Soldering Connection,
Angled.

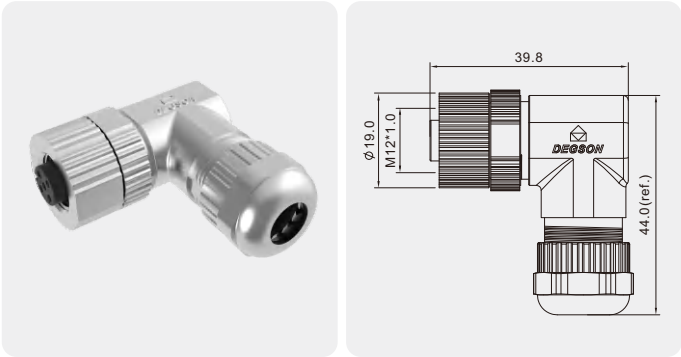


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		03 Pin	04 Pin	05 Pin	06 Pin	08 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	A-Coded	A-Coded
	Front View					
Rated current	A.	4A	4A	4A	2A	2A
Rated voltage	V.	250V	250V	60V	30V	30V
Wire/Cable	Wire gauge	22AWG	22AWG	22AWG	24AWG	24AWG
	Cross section	0.34mm²	0.34mm²	0.34mm²	0.25mm²	0.25mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Cable OD : 4.5-6.0mm		PASH-M12A-03P-FF-SR7001-00AH	PASH-M12A-04P-FF-SR7001-00AH	PASH-M12A-05P-FF-SR7001-00AH	PASH-M12A-06P-FF-SR7001-00AH	PASH-M12A-08P-FF-SR7001-00AH
Cable OD : 6.0-7.5mm		PASH-M12A-03P-FF-SR7002-00AH	PASH-M12A-04P-FF-SR7002-00AH	PASH-M12A-05P-FF-SR7002-00AH	PASH-M12A-06P-FF-SR7002-00AH	PASH-M12A-08P-FF-SR7002-00AH

Component part drawing

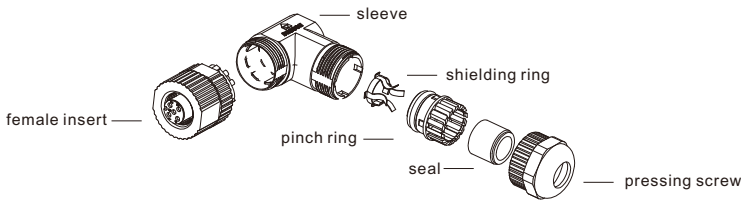

M12 x 1 Female Field Assembly Plug,
Shielded,Soldering Connection,
Angled.

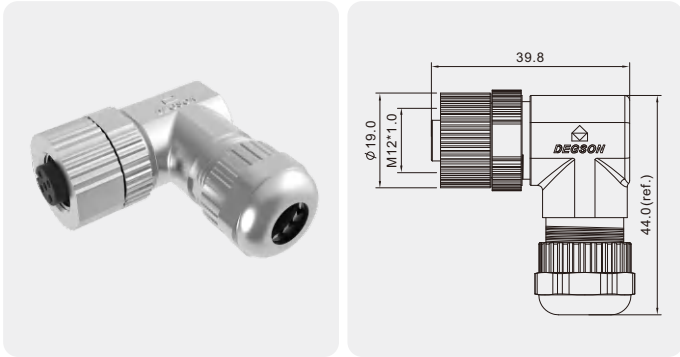


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,06,08,10,12,17 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Shielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ + 105°C	—	—
IP Class	IP67	—	—

Number of Pins		10 Pin	12 Pin	17 Pin	05 Pin	04 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded	B-Coded	D-Coded
	Front View					
Rated current	A.	1.5A	1.5A	1.5A	4A	4A
Rated voltage	V.	30V	30V	30V	60V	250V
Wire/Cable	Wire gauge	26AWG	26AWG	26AWG	22AWG	22AWG
	Cross section	0.14mm²	0.14mm²	0.14mm²	0.34mm²	0.34mm²
Description		Order NO .	Order NO .	Order NO .	Order NO .	Order NO .
Cable OD : 4.5-6.0mm		PASH-M12A-10P-FF-SR7001-00AH	PASH-M12A-12P-FF-SR7001-00AH	PASH-M12A-17P-FF-SR7001-00AH	PASH-M12B-05P-FF-SR7001-00AH	PASH-M12D-04P-FF-SR7001-00AH
Cable OD : 6.0-7.5mm		PASH-M12A-10P-FF-SR7002-00AH	PASH-M12A-12P-FF-SR7002-00AH	PASH-M12A-17P-FF-SR7002-00AH	PASH-M12B-05P-FF-SR7002-00AH	PASH-M12D-04P-FF-SR7002-00AH

Component part drawing

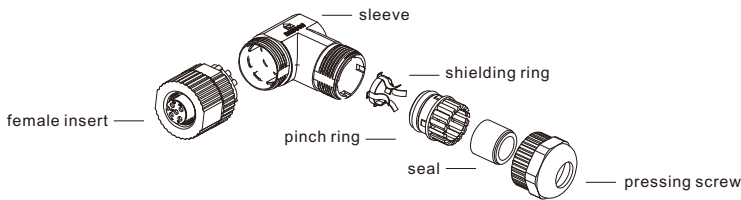

M12 x 1 Female Field Assembly Plug, Shielded,Crimping Connection, Straight.

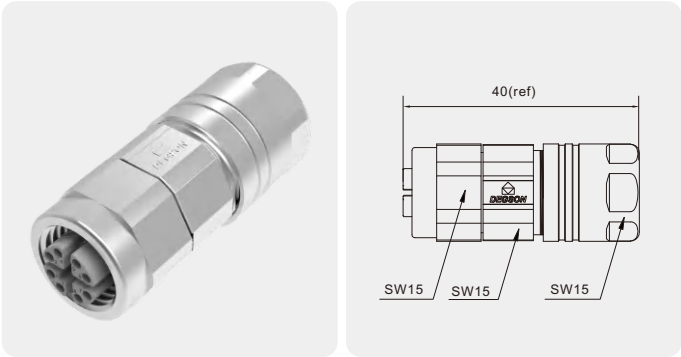


Technical Data


Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	08Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	0.5A max.	Seal	Silicone
Rated voltage	50V max.	Shielding	Shielded
Insulation resistance	≥100MQ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		08 Pin
Coding	Coded	X-Coded
	Front View	
Rated current	A.	0.5A
Rated voltage	V.	50V AC / 60V DC
Wire/Cable	Wire gauge	22~26AWG
	Wire diameter including insulation	≤Φ 1.6mm
	Conductor cross section	0.14~0.34mm²
Description		Order NO .
Cable OD : Φ6.0~Φ9.5mm		PCSH-M12X-08P-FF-SL7001-00AH

Component part drawing

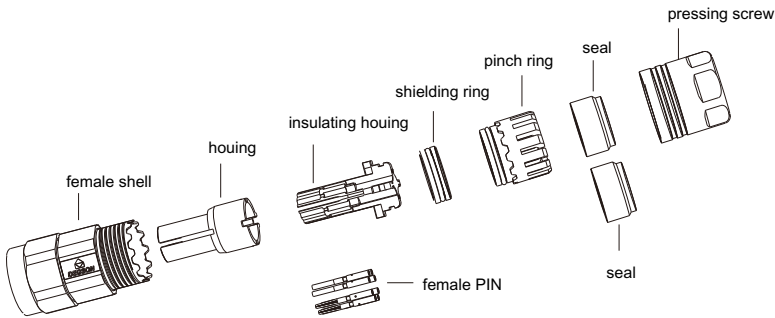

M12 x 1 Female Field Assembly Plug, Shielded, Crimping Connection, Straight.

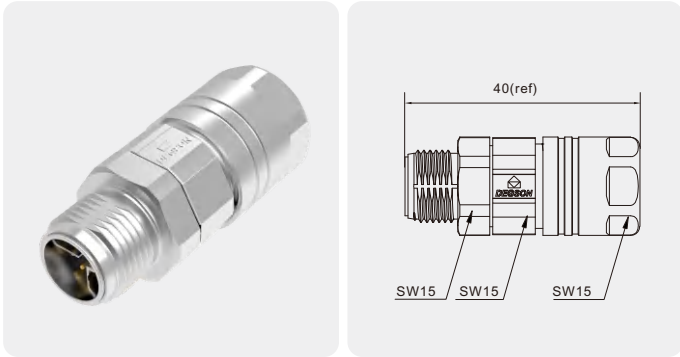


Technical Data

Standard	IEC 61076	Contact carriers material	PA
Series	M12, Female	Contact material	Copper Alloy, Gold-plated
Number of Pins	08Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	0.5A max.	Seal	Silicone
Rated voltage	50V max.	Shielding	Shielded
Insulation resistance	≥100MQ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 40 ~ +85°C	—	—
IP Class	IP67	—	—

Number of Pins		08 Pin
Coding	Coded	X-Coded
	Front View	
Rated current	A.	0.5A
Rated voltage	V.	50V AC / 60V DC
Wire/Cable	Wire gauge	22~26AWG
	Wire diameter including insulation	≤Φ 1.6mm
	Conductor cross section	0.14~0.34mm²
Description		订单号 Order NO .
Cable OD : Φ6.0~Φ9.5mm		PCSH-M12X-08P-MM-SL7001-00AH

Component part drawing

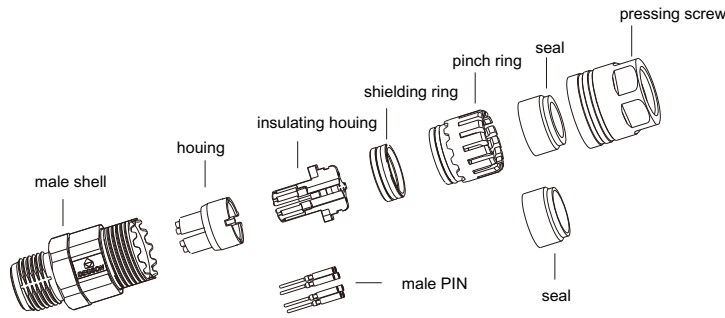




Advantages

- Perfect compatibility with each brand.
- A variety of combinations meet multiple installation environments.
- 360 ° EMC shielding, suitable for complex electromagnetic environments.
- Optimize the structure. Improve the wire ends locking to reduce trouble risks; Innovative anti-return contact pins to prevent the internal structure from loosening; Second locking system improve product reliability.
- Anti-vibration ensure high reliability in harsh environment.
- Easy installation, even non-professionals can quickly complete the assembly and replace the defective parts.
- Complete test report.


Features

- Rated current: up to 28A
- Rated voltage: up to 630V
- Signal: 12 Pins, 17 Pins
- Power: 5+PE
- Hybrid: 5+3+PE
- Protection Degree: IP67
- Assembly and panel type Installation
- Suitable for standard connection technology

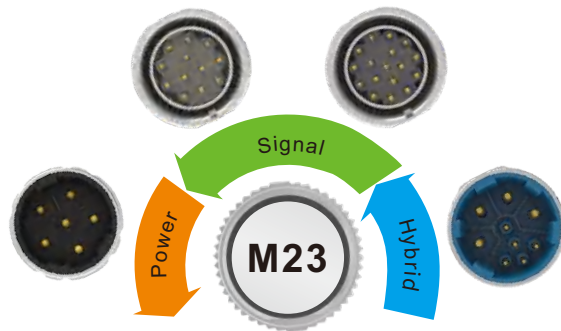

Circular Connectors Part Number

Circular Connectors Part Number Reference

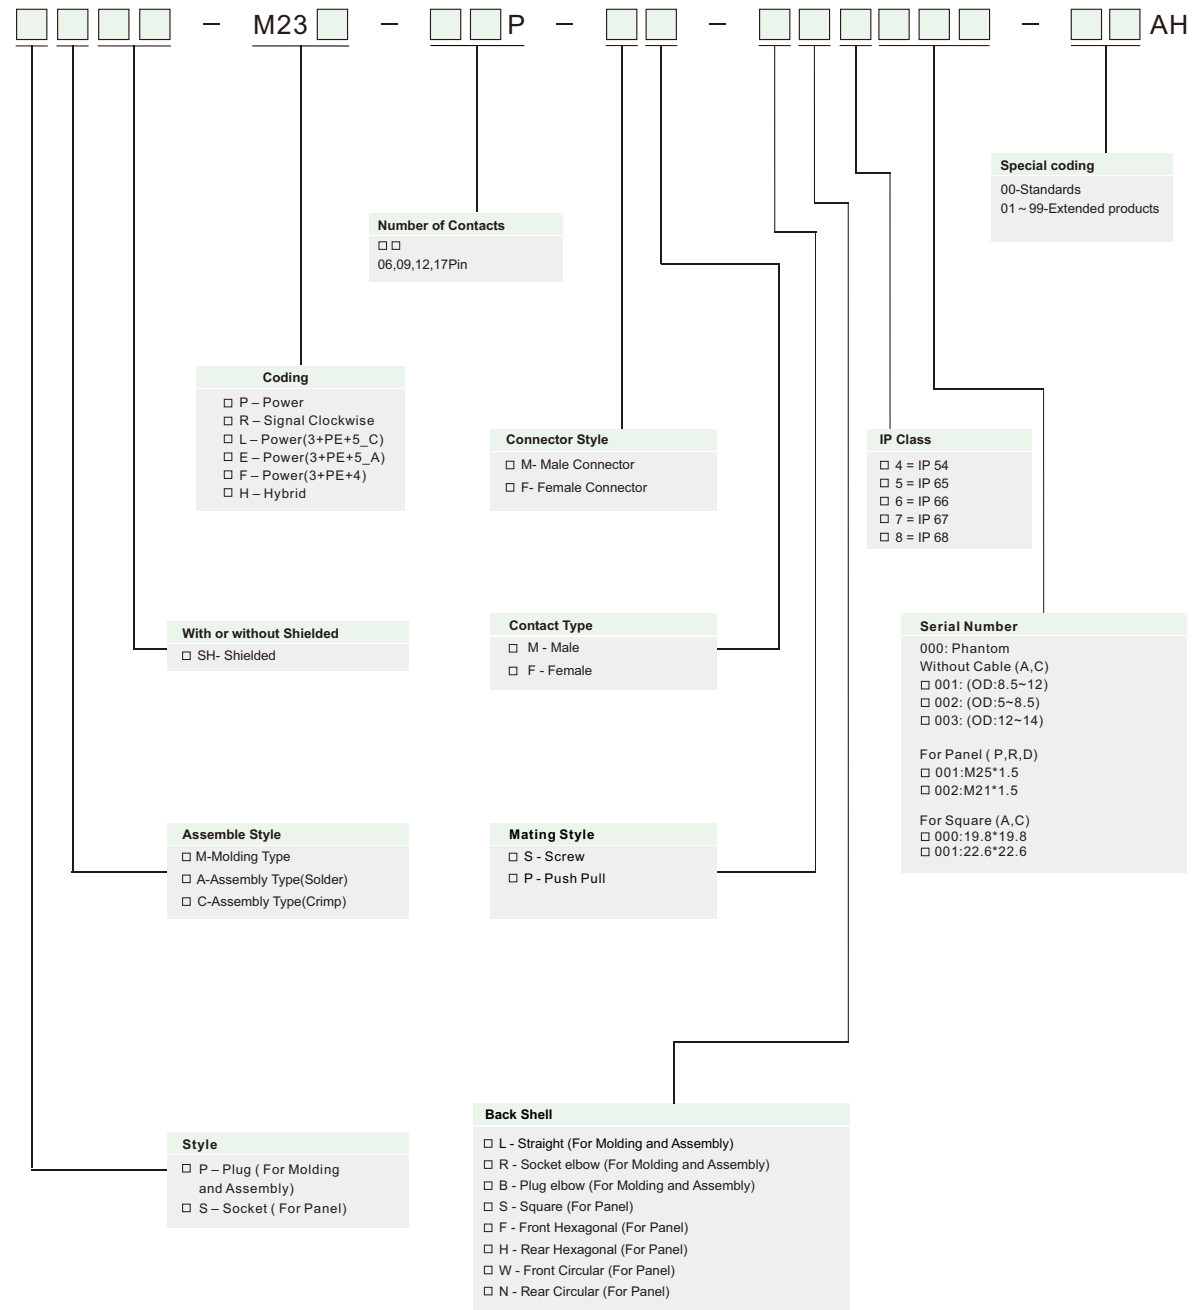


For example :

Assembly Type Signal 06Pin : PCSH-M23P-06P-FF-SL7001-00A(H)

Details: Assembly Type,M23 Power,6Pin,female socket female Pin,thread locked, straight head, IP67,standard products.

M23x 1 Male Field Assembly Plug,
Shielded,Crimping Connection,
Straight.

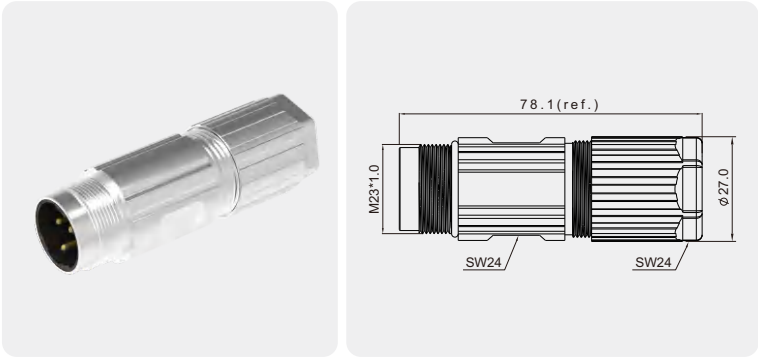


Technical Data


Series	M23, Male	Contact carriers material	PA
Number of Pins	5+PE	Contact material	Copper Alloy, Gold-plated
Rated Current	28A	Metal shell	Copper Alloy with Nickel Plated
Rated voltage	630V	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Shielded
Withstand voltage	4.0KV AC	Mechanical life	≥ 500 mating cycles
Ambient temperature	- 40 ~ +125℃	IP Class	IP67

Number of Pins		5+PE Pin
Coding	Front View	
Rated current	A.	28A
Rated voltage	V.	630V
Wire gauge		12-14AWG
Apply OD		8.5-12mm
Description		Order NO .
With the Pin		PCSH-M23P-06P-MM-SL7001-00A(H)

Component part drawing

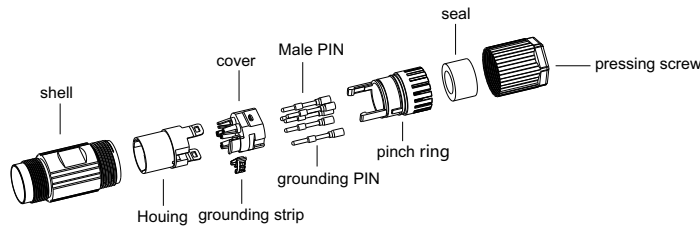

M23x 1 Male Field Assembly Plug,
Shielded,Crimping Connection,
Straight.

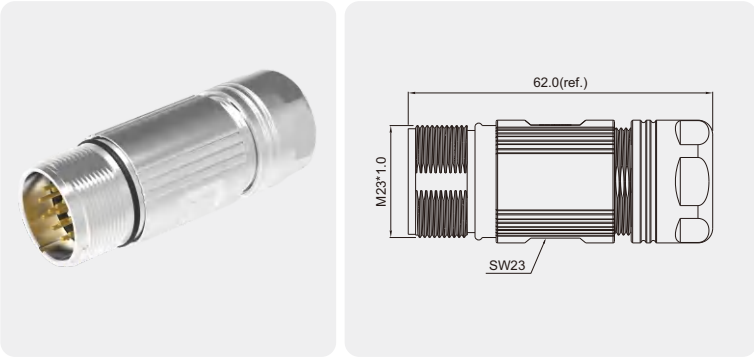


Technical Data


Series	M23,Male	Contact carriers material	PBT
Number of Pins	12,17 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	8A	Metal shell	Zinc Alloy with Nickel Plated
Rated voltage	160V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Shielded
Withstand voltage	2.0KV AC	Mechanical life	≥ 500 mating cycles
Ambient temperature	- 40 ~ +125℃	IP Class	IP67

Number of Pins		12 Pin	17 Pin
Coding	Front View		
Rated current	A.	8A	8A
Rated voltage	V.	160V	125V
Wire gauge		18-28AWG	18-28AWG
Apply OD		5-14mm	5-14mm
Description		Order NO .	Order NO .
With the Pin	OD 8.5~12mm	PCSH-M23R-12P-MM-SL7001-00A(H)	PCSH-M23R-17P-MM-SL7001-00A(H)
	OD 5~8.5mm	PCSH-M23R-12P-MM-SL7002-00A(H)	PCSH-M23R-17P-MM-SL7002-00A(H)
	OD 12~14mm	PCSH-M23R-12P-MM-SL7003-00A(H)	PCSH-M23R-17P-MM-SL7003-00A(H)
Without the Pin	OD 8.5~12mm	P-M23R-12P-MM-SL7001-00A(H)	P-M23R-17P-MM-SL7001-00A(H)
	OD 5~8.5mm	P-M23R-12P-MM-SL7002-00A(H)	P-M23R-17P-MM-SL7002-00A(H)
	OD 12~14mm	P-M23R-12P-MM-SL7003-00A(H)	P-M23R-17P-MM-SL7003-00A(H)
Pin	24~28AWG	CT-M23R-GM-10-01	CT-M23R-GM-10-01
	18~24AWG	CT-M23R-GM-10-02	CT-M23R-GM-10-02

Component part drawing

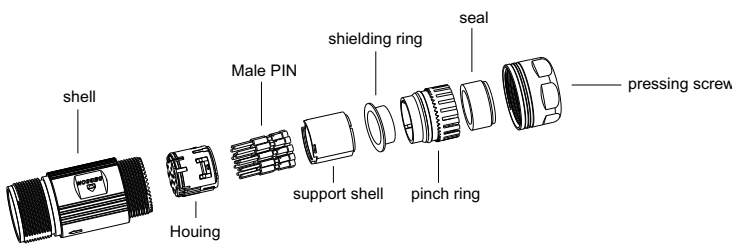

M23x 1 Female Field Assembly Plug, Shielded,Crimping Connection, Straight.

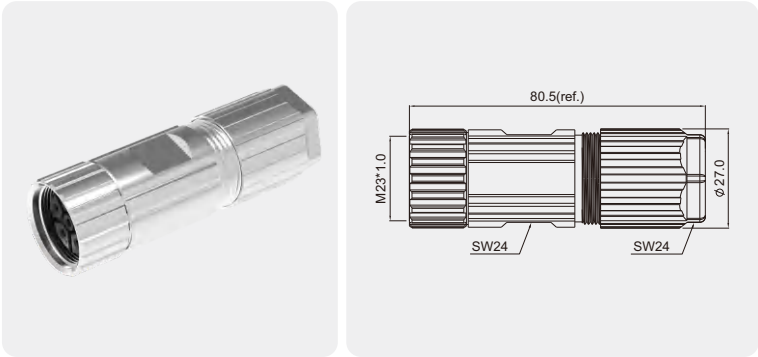


Technical Data


Series	M23, Female	Contact carriers material	PA
Number of Pins	5+PE	Contact material	Copper Alloy, Gold-plated
Rated Current	28A	Metal shell	Copper Alloy with Nickel Plated
Rated voltage	630V	Seal	Silicone
Insulation resistance	≥100MQ	Shielding	Shielded
Withstand voltage	4.0KV AC	Mechanical life	≥ 500 mating cycles
Ambient temperature	- 40 ~ + 125℃	IP Class	IP67

Number of Pins		5+PE Pin
Coding	Front View	
Rated current	A.	28A
Rated voltage	V.	630V
Wire gauge		12-14AWG
Apply OD		8.5-12mm
Description		Order NO .
With the Pin		PCSH-M23P-06P-FF-SL7001-00A(H)

Component part drawing

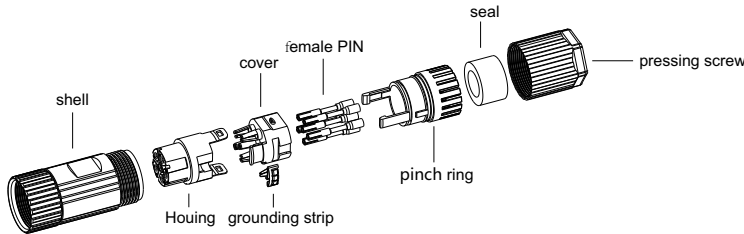

M23x 1 Female Field Assembly Plug, Shielded,Crimping Connection, Straight.

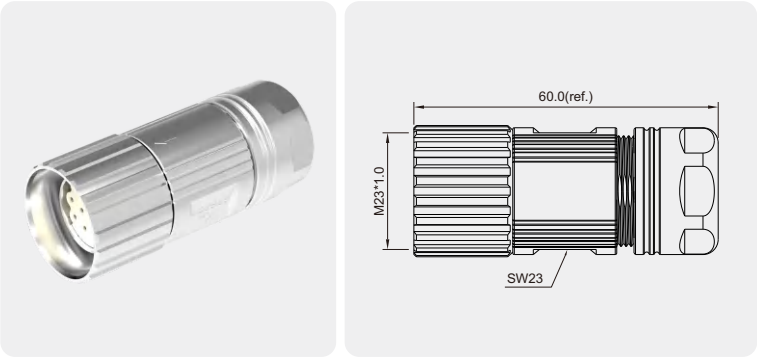


Technical Data


Series	M23, Female	Contact carriers material	PBT
Number of Pins	12,17 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	8A	Metal shell	Zinc Alloy with Nickel Plated
Rated voltage	160V max.	Seal	Silicone
Insulation resistance	≥100MQ	Shielding	Shielded
Withstand voltage	2.0KV AC	Mechanical life	≥ 500 mating cycles
Ambient temperature	- 40 ~ + 125℃	IP Class	IP67

Number of Pins		12 Pin	17 Pin
Coding	Front View		
Rated current	A.	8A	8A
Rated voltage	V.	160V	125V
Wire gauge		18-28AWG	18-28AWG
Apply OD		5-14mm	5-14mm
Description		Order NO .	Order NO .
With the Pin	OD 8.5~12mm	PCSH-M23R-12P-FF-SL7001-00A(H)	PCSH-M23R-17P-FF-SL7001-00A(H)
	OD 5~8.5mm	PCSH-M23R-12P-FF-SL7002-00A(H)	PCSH-M23R-17P-FF-SL7002-00A(H)
	OD 12~14mm	PCSH-M23R-12P-FF-SL7003-00A(H)	PCSH-M23R-17P-FF-SL7003-00A(H)
Without the Pin	OD 8.5~12mm	P-M23R-12P-FF-SL7001-00A(H)	P-M23R-17P-FF-SL7001-00A(H)
	OD 5~8.5mm	P-M23R-12P-FF-SL7002-00A(H)	P-M23R-17P-FF-SL7002-00A(H)
	OD 12~14mm	P-M23R-12P-FF-SL7003-00A(H)	P-M23R-17P-FF-SL7003-00A(H)
Pin	24~28AWG	CT-M23R-GF-10-01	CT-M23R-GF-10-01
	18~24AWG	CT-M23R-GF-10-02	CT-M23R-GF-10-02

Component part drawing

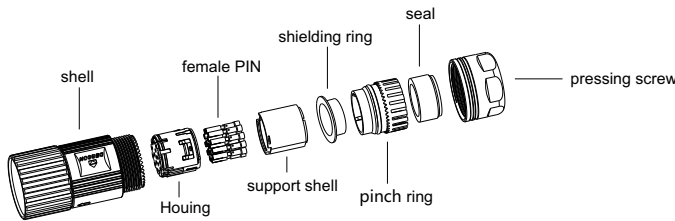

M23x 1 Female Field Assembly
Plug Shielded, Crimping
Connection, Straight.

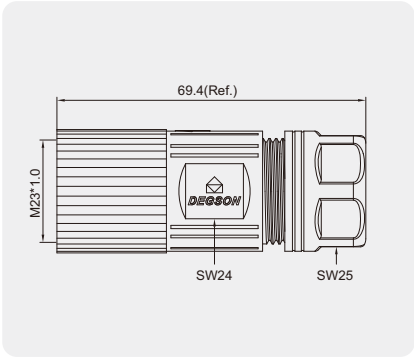


Technical Data


Series	M23, Female	Contact carriers material	PA
Number of Pins	5+3+PE	Contact material	Copper Alloy, Gold-plated
Rated Current	Power: 30A	Metal shell	Copper Alloy with Nickel Plated
	Signal: 7A	Seal	Silicone
Rated voltage	Power: 630V	Shielding	Shielded
	Signal: 250V	Mechanical life	≥ 500 mating cycles
Insulation resistance	≥100MQ	IP Class	IP67
Withstand voltage	3.5KV AC max.	—	—
Ambient temperature	- 40 ~ +125°C	—	—

Number of Pins		5+3+PE Pin
Coding	Front View	
Rated current	A.	30A / 7A
Rated voltage	V.	630V / 250V
Wire gauge		Power : 0.35-2.5mm ² Signal : 0.06-1.0mm ²
Apply OD		8.5-12mm
Description		Order NO .
With the Pin		PCSH-M23L-09P-FF-SL7001-00A(H)

Component part drawing

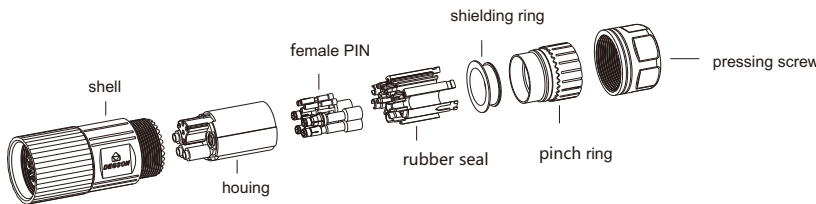

M23x 1 Male Panel Mount
Receptacle,Field Assembly
Socket,Shielded,Crimping
Connection,Straight.

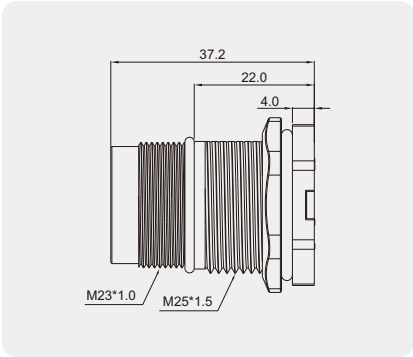


Technical Data


Series	M23, Male	Contact carriers material	PA
Number of Pins	5+PE	Contact material	Copper Alloy, Gold-plated
Rated Current	28A	Metal shell	Copper Alloy with Nickel Plated
Rated voltage	630V	Seal	Silicone
Insulation resistance	≥100MQ	Shielding	Shielded
Withstand voltage	4.0KV AC	Mechanical life	≥ 500 mating cycles
Ambient temperature	- 40 ~ +125°C	IP Class	IP67

Number of Pins		5+PE Pin
Coding	Front View	
Rated current	A.	28A
Rated voltage	V.	630V
Wire gauge		12-14AWG
Description		Order NO .
With the Pin		SCSH-M23P-06P-MM-SF7001-00A(H)

Component part drawing

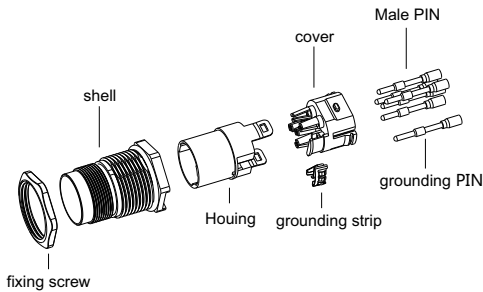

M23x 1 Male Panel Mount
Receptacle,Field Assembly
Socket,Shielded,Crimping
Connection,Straight.

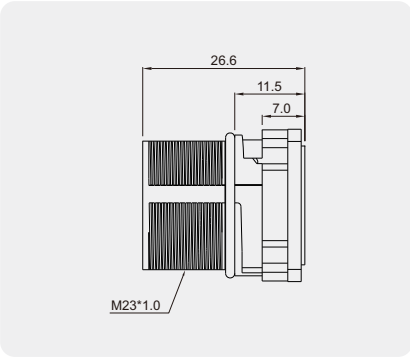


Technical Data


Series	M23,Male	Contact carriers material	PBT
Number of Pins	12,17 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	8A	Metal shell	Zinc Alloy with Nickel Plated
Rated voltage	160V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Shielded
Withstand voltage	2.0KV AC	Mechanical life	≥ 500 mating cycles
Ambient temperature	- 40 ~ + 125℃	IP Class	IP67

Number of Pins		10 Pin	17 Pin
Coding	Front View		
Rated current	A.	8A	8A
Rated voltage	V.	160V	125V
Wire gauge		18-28AWG	18-28AWG
Description		Order NO .	Order NO .
With the Pin		SCSH-M23R-12P-MM-SS7000-00A(H)	SCSH-M23R-17P-MM-SS7000-00A(H)
Without the Pin		S-M23R-12P-MM-SS7000-00A(H)	S-M23R-17P-MM-SS7000-00A(H)
Pin		CT-M23R-GM-10-01	CT-M23R-GM-10-01
		CT-M23R-GM-10-02	CT-M23R-GM-10-02

Component part drawing



M23x 1 Male Panel Mount
Receptacle,Field Assembly
Socket,Shielded,
Crimping Connection,Angled.

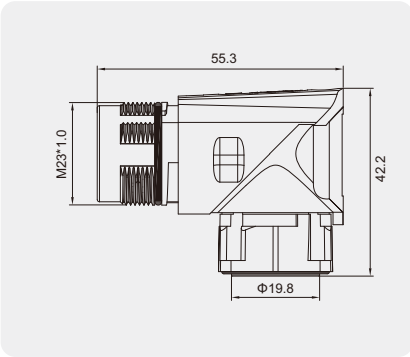


Technical Data


Series	M23,Male	Contact carriers material	PBT
Number of Pins	12,17 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	7A	Metal shell	Zinc Alloy with Nickel Plated
Rated voltage	160V	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Shielded
Withstand voltage	2.0KV AC	Mechanical life	≥ 500 mating cycles
Ambient temperature	- 20 ~ + 125℃	IP Class	IP67

Number of Pins		12 Pin
Coding	Front View	
Rated current	A.	7A
Rated voltage	V.	160V
Wire gauge		18-24AWG
Description		Order NO .
With the Pin		SCSH-M23R-12P-MM-SR7000-00A(H)
Without the Pin		S-M23R-12P-MM-SR7000-00A(H)
Pin		CT-M23R-GM-10-01
		CT-M23R-GM-10-02

Component part drawing

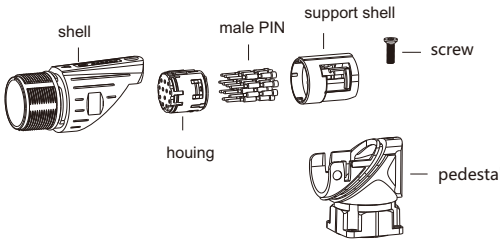

M23x 1 Male Panel Mount
Receptacle,Field Assembly
Socket,Shielded,
Crimping Connection,Angled.

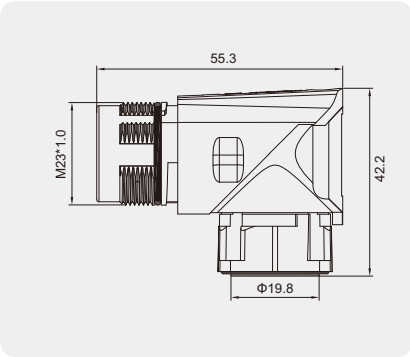


Technical Data


Series	M23,Male	Contact carriers material	PBT
Number of Pins	12,17 Pin	Contact material	Copper Alloy , Gold-plated
Rated Current	7A	Metal shell	Zinc Alloy with Nickel Plated
Rated voltage	160V	Seal	Silicone
Insulation resistance	≥100MΩ	Shielding	Shielded
Withstand voltage	2.0KV AC	Mechanical life	≥ 500 mating cycles
Ambient temperature	- 20 ~ + 125℃	IP Class	IP67

Number of Pins		17 Pin
Coding	Front View	
Rated current	A.	7A
Rated voltage	V.	160V
Wire gauge		18-24AWG
Description		Order NO .
With the Pin		SCSH-M23R-17P-MM-SR7000-00A(H)
Without the Pin		S-M23R-17P-MM-SR7000-00A(H)
Pin	CT-M23R-GM-10-01	
	CT-M23R-GM-10-02	

Component part drawing

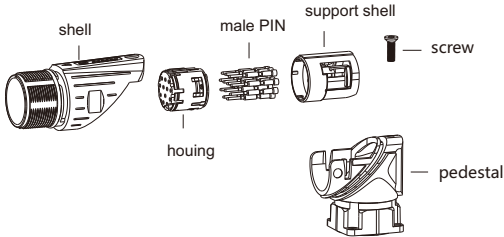

M23x 1 Male Panel Mount
Receptacle,Field Assembly
Socket,Shielded,Crimping
Connection,Angled.

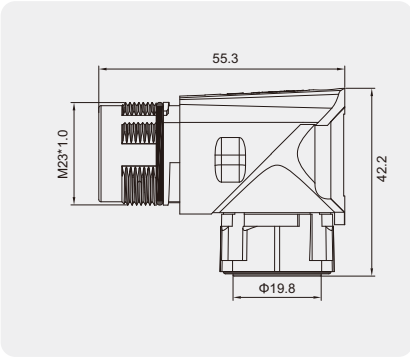



Technical Data

Series	M23, Female	Contact carriers material	PBT
Number of Pins	5+3+PE	Contact material	Copper Alloy , Gold-plated
Rated Current	Power: 30A	Metal shell	Zinc Alloy with Nickel Plated
	Signal: 7A	Seal	Silicone
Rated voltage	Power: 630V	Shielding	Shielded
	Signal: 250V	Mechanical life	≥ 500 mating cycles
Insulation resistance	≥100MΩ	IP Class	IP67
Withstand voltage	3.5KV AC max.	—	—
Ambient temperature	- 20 ~ + 125℃	—	—

Number of Pins		5+3+PE Pin
Coding	Front View	
Rated current	A.	30A / 7A
Rated voltage	V.	630V / 250V
Wire gauge	Power: 0.35-2.5mm²	
	Signal: 0.14-1.0mm²	
Description		Order NO .
With the Pin		SCSH-M23L-09P-MM-SR7000-00A(H)
Without the Pin		S-M23L-09P-MM-SR7000-00A(H)
Pin	CT-M23R-GM-10-01	
	CT-M23R-GM-10-02	

Component part drawing

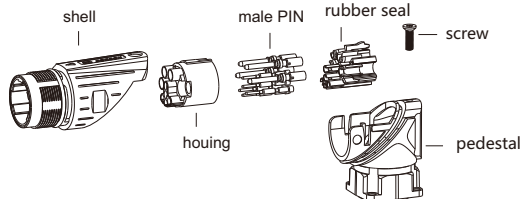

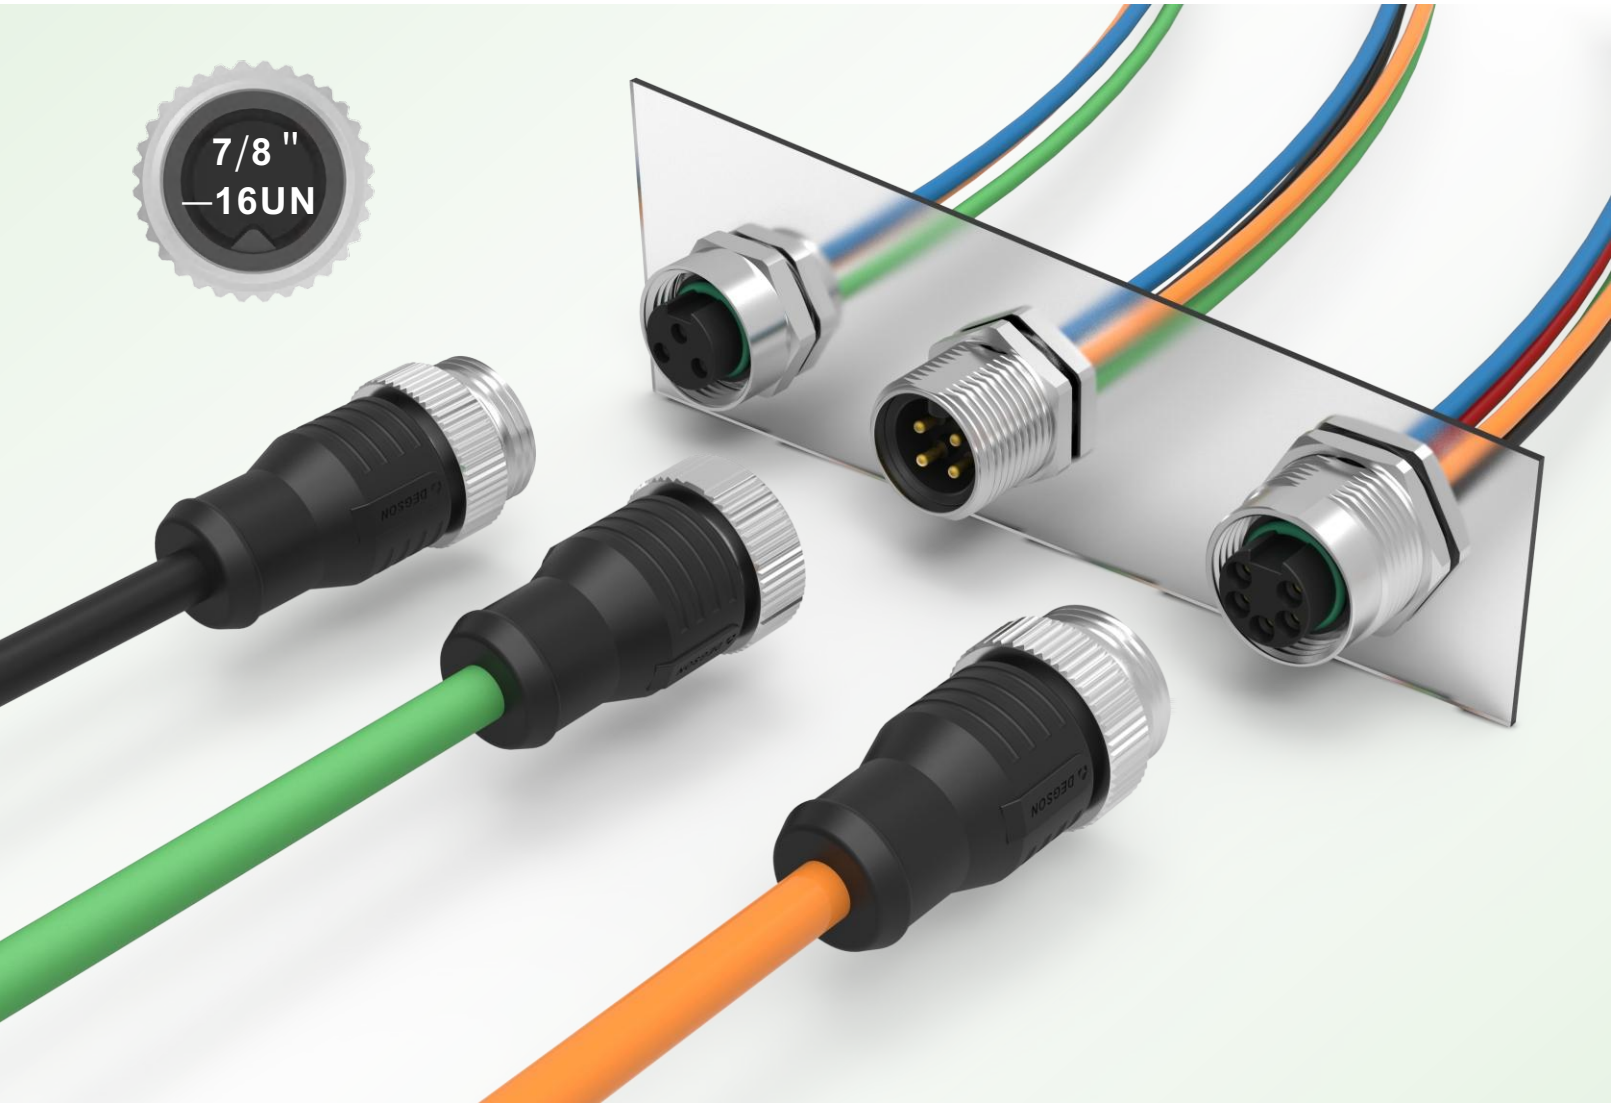


Advantages

- Good sealing performance ,with IP class up to IP 68.
- Dimension optimization,save space.
- Shield is optional,provide reliable electromagnetic protection.
- Wire connection method is optional, suitable for continuous shock and vibration environment.
- Connection technology is suitable for all application field.
- Compatible with same series connectors on the market.


Features

- Cable material: PUR, PVC.
- IP-class: IP68.
- Shield is optional.
- Wire connection is optional.
- Compliance with IEC 61076 standard.

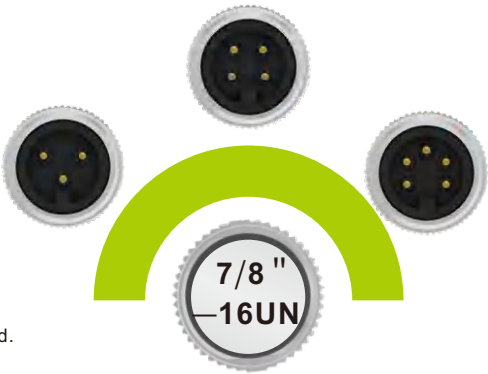

Circular Connectors Part Number

Circular Connectors Part Number Reference

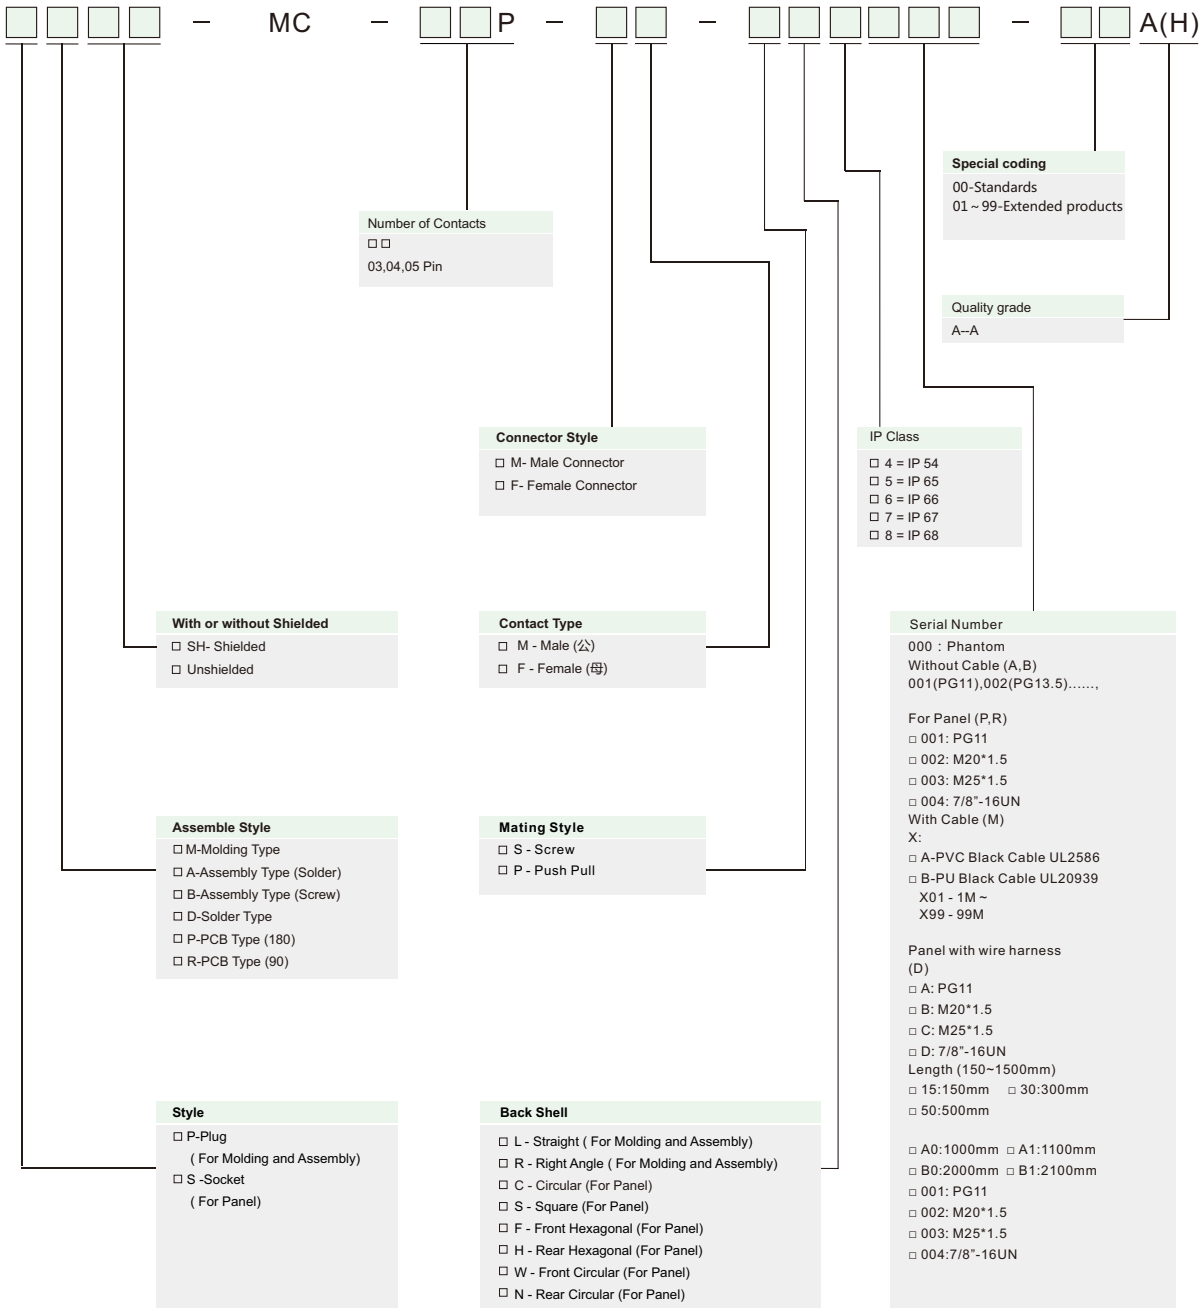


For example:

1. 7/8—16UN" female plug 5Pin: PM-MC-05P-FF-SL8A01-00A(H)

Details: Plastic covered at the end of wire, 7/8—16UN" , 5Pin, female socket female Pin, thread locked, straight head, IP68, PVC black kacket.

7/8 " —16UN Female Overmolded with Cable Plug,Single end, Unshielded,Straight.

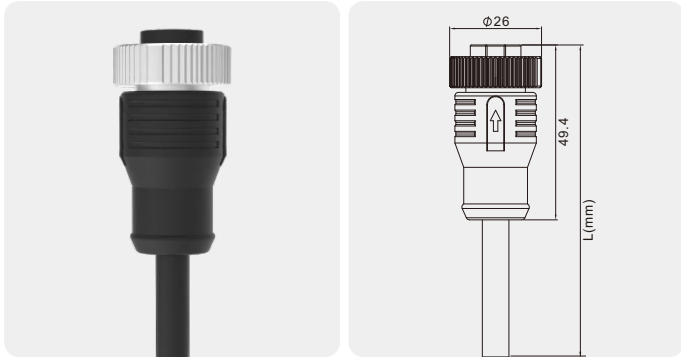


Technical Data

Series	7/8 " —16UN Female, Straight	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	300V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80°C	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	300V	300V	300V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG
	Cross section	1.5mm²	1.5mm²	1.5mm²
	Wiring list	PE.GN/YE 2.BN 3.BU	1.BK 2.BU PE.GN/YE 3.BN 4.WH	1.BK PE.GN/YE 4.BN 5.WH
Description		Order NO .	Order NO .	Order NO .
PVC	1m	PM-MC-03P-FF-SL8A01-00A(H)	PM-MC-04P-FF-SL8A01-00A(H)	PM-MC-05P-FF-SL8A01-00A(H)
	3m	PM-MC-03P-FF-SL8A03-00A(H)	PM-MC-04P-FF-SL8A03-00A(H)	PM-MC-05P-FF-SL8A03-00A(H)
	5m	PM-MC-03P-FF-SL8A05-00A(H)	PM-MC-04P-FF-SL8A05-00A(H)	PM-MC-05P-FF-SL8A05-00A(H)
	Customized	*****	*****	*****
PUR	1m	PM-MC-03P-FF-SL8B01-00A(H)	PM-MC-04P-FF-SL8B01-00A(H)	PM-MC-05P-FF-SL8B01-00A(H)
	3m	PM-MC-03P-FF-SL8B03-00A(H)	PM-MC-04P-FF-SL8B03-00A(H)	PM-MC-05P-FF-SL8B03-00A(H)
	5m	PM-MC-03P-FF-SL8B05-00A(H)	PM-MC-04P-FF-SL8B05-00A(H)	PM-MC-05P-FF-SL8B05-00A(H)
	Customized	*****	*****	*****

7/8 " —16UN Female Overmolded with Cable Plug,Single end, Unshielded,Angled.

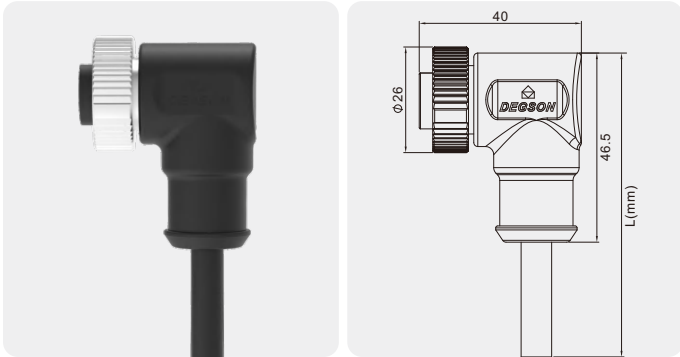


Technical Data

Series	7/8 " —16UN Female, Angled	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	300V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80°C	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	300V	300V	300V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG
	Cross section	1.5mm²	1.5mm²	1.5mm²
	Wiring list	PE.GN/YE 2.BN 3.BU	1.BK 2.BU PE.GN/YE 3.BN 4.WH	1.BK 2.BU PE.GN/YE 4.BN 5.WH
Description		Order NO .	Order NO .	Order NO .
PVC	1m	PM-MC-03P-FF-SR8A01-00A(H)	PM-MC-04P-FF-SR8A01-00A(H)	PM-MC-05P-FF-SR8A01-00A(H)
	3m	PM-MC-03P-FF-SR8A03-00A(H)	PM-MC-04P-FF-SR8A03-00A(H)	PM-MC-05P-FF-SR8A03-00A(H)
	5m	PM-MC-03P-FF-SR8A05-00A(H)	PM-MC-04P-FF-SR8A05-00A(H)	PM-MC-05P-FF-SR8A05-00A(H)
	Customized	*****	*****	*****
PUR	1m	PM-MC-03P-FF-SR8B01-00A(H)	PM-MC-04P-FF-SR8B01-00A(H)	PM-MC-05P-FF-SR8B01-00A(H)
	3m	PM-MC-03P-FF-SR8B03-00A(H)	PM-MC-04P-FF-SR8B03-00A(H)	PM-MC-05P-FF-SR8B03-00A(H)
	5m	PM-MC-03P-FF-SR8B05-00A(H)	PM-MC-04P-FF-SR8B05-00A(H)	PM-MC-05P-FF-SR8B05-00A(H)
	Customized	*****	*****	*****

7/8 " —16UN Female Overmolded with Cable Plug, Single end, Shielded, Straight.

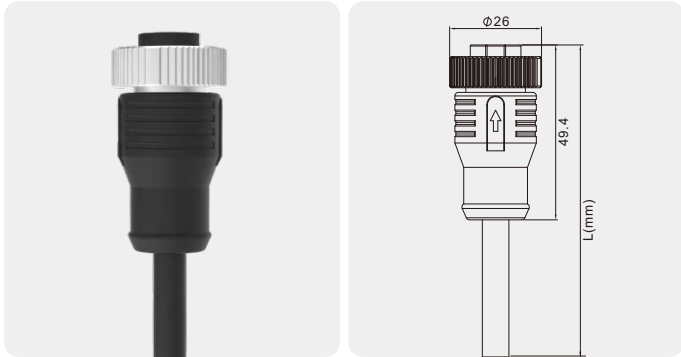


Technical Data

Series	7/8 " —16UN Female, Straight	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	300V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Shielded
Ambient temperature	- 25 ~ + 80℃	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	300V	300V	300V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG
	Cross section	1.5mm²	1.5mm²	1.5mm²
	Wiring list	PE.GN/YE 2.BN 3.BU	1.BK 2.BU 3.BN 4.WH	1.BK PE.GN/YE 4.BN 5.WH
Description		Order NO .	Order NO .	Order NO .
PVC	1m	PMSH-MC-03P-FF-SL8A01-00A(H)	PMSH-MC-04P-FF-SL8A01-00A(H)	PMSH-MC-05P-FF-SL8A01-00A(H)
	3m	PMSH-MC-03P-FF-SL8A03-00A(H)	PMSH-MC-04P-FF-SL8A03-00A(H)	PMSH-MC-05P-FF-SL8A03-00A(H)
	5m	PMSH-MC-03P-FF-SL8A05-00A(H)	PMSH-MC-04P-FF-SL8A05-00A(H)	PMSH-MC-05P-FF-SL8A05-00A(H)
	Customized	*****	*****	*****
PUR	1m	PMSH-MC-03P-FF-SL8B01-00A(H)	PMSH-MC-04P-FF-SL8B01-00A(H)	PMSH-MC-05P-FF-SL8B01-00A(H)
	3m	PMSH-MC-03P-FF-SL8B03-00A(H)	PMSH-MC-04P-FF-SL8B03-00A(H)	PMSH-MC-05P-FF-SL8B03-00A(H)
	5m	PMSH-MC-03P-FF-SL8B05-00A(H)	PMSH-MC-04P-FF-SL8B05-00A(H)	PMSH-MC-05P-FF-SL8B05-00A(H)
	Customized	*****	*****	*****

7/8 " —16UN Female Overmolded with Cable Plug, Single end, Shielded, Angled.

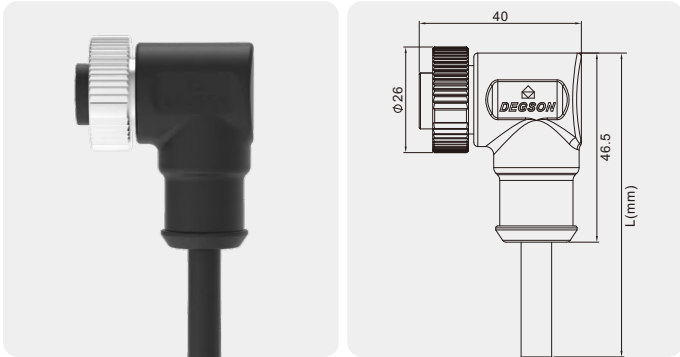


Technical Data

Series	7/8 " —16UN Female, Angled	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	300V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Shielded
Ambient temperature	- 25 ~ + 80℃	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	300V	300V	300V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG
	Cross section	1.5mm²	1.5mm²	1.5mm²
	Wiring list	PE.GN/YE 2.BN 3.BU	1.BK 2.BU 3.BN 4.WH	1.BK 2.BU PE.GN/YE 4.BN 5.WH
Description		Order NO .	Order NO .	Order NO .
PVC	1m	PMSH-MC-03P-FF-SR8A01-00A(H)	PMSH-MC-04P-FF-SR8A01-00A(H)	PMSH-MC-05P-FF-SR8A01-00A(H)
	3m	PMSH-MC-03P-FF-SR8A03-00A(H)	PMSH-MC-04P-FF-SR8A03-00A(H)	PMSH-MC-05P-FF-SR8A03-00A(H)
	5m	PMSH-MC-03P-FF-SR8A05-00A(H)	PMSH-MC-04P-FF-SR8A05-00A(H)	PMSH-MC-05P-FF-SR8A05-00A(H)
	Customized	*****	*****	*****
PUR	1m	PMSH-MC-03P-FF-SR8B01-00A(H)	PMSH-MC-04P-FF-SR8B01-00A(H)	PMSH-MC-05P-FF-SR8B01-00A(H)
	3m	PMSH-MC-03P-FF-SR8B03-00A(H)	PMSH-MC-04P-FF-SR8B03-00A(H)	PMSH-MC-05P-FF-SR8B03-00A(H)
	5m	PMSH-MC-03P-FF-SR8B05-00A(H)	PMSH-MC-04P-FF-SR8B05-00A(H)	PMSH-MC-05P-FF-SR8B05-00A(H)
	Customized	*****	*****	*****

7/8 " —16UN Male Overmolded with Cable Plug,Single end, Unshielded,Straight.

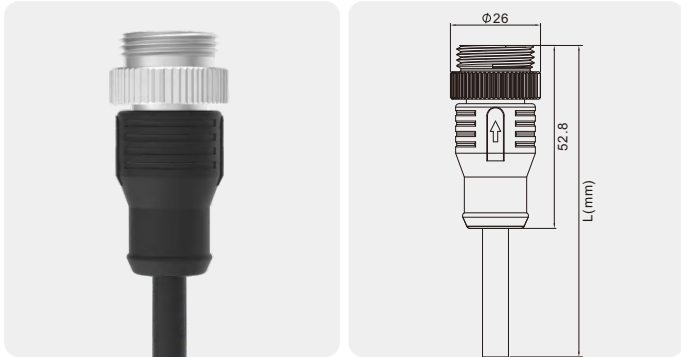


Technical Data

Series	7/8 " —16UN Male, Straight	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	300V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80°C	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	300V	300V	300V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG
	Cross section	1.5mm ²	1.5mm ²	1.5mm ²
	Wiring list	PE,GN/YE 2.BN 3.BU	1.BK 2.BU PE,GN/YE 3.BN 4.WH	1.BK PE,GN/YE 4.BN 5.WH
Description		Order NO .	Order NO .	Order NO .
PVC	1m	PM-MC-03P-MM-SL8A01-00A(H)	PM-MC-04P-MM-SL8A01-00A(H)	PM-MC-05P-MM-SL8A01-00A(H)
	3m	PM-MC-03P-MM-SL8A03-00A(H)	PM-MC-04P-MM-SL8A03-00A(H)	PM-MC-05P-MM-SL8A03-00A(H)
	5m	PM-MC-03P-MM-SL8A05-00A(H)	PM-MC-04P-MM-SL8A05-00A(H)	PM-MC-05P-MM-SL8A05-00A(H)
	Customized	*****	*****	*****
PUR	1m	PM-MC-03P-MM-SL8B01-00A(H)	PM-MC-04P-M-SL8B01-00A(H)	PM-MC-05P-MM-SL8B01-00A(H)
	3m	PM-MC-03P-MM-SL8B03-00A(H)	PM-MC-04P-MM-SL8B03-00A(H)	PM-MC-05P-MM-SL8B03-00A(H)
	5m	PM-MC-03P-MM-SL8B05-00A(H)	PM-MC-04P-MM-SL8B05-00A(H)	PM-MC-05P-MM-SL8B05-00A(H)
	Customized	*****	*****	*****

7/8 " —16UN Male Overmolded with Cable Plug,Single end, Unshielded,Angled.

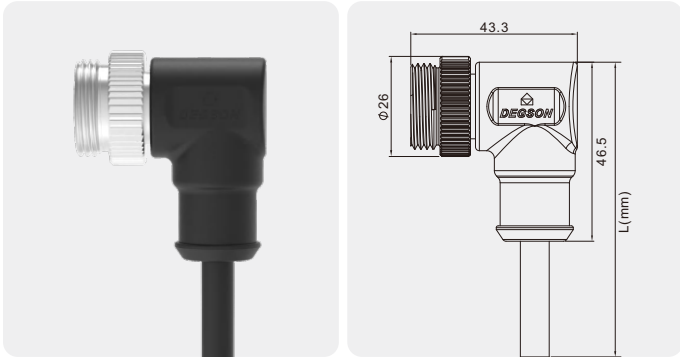


Technical Data

Series	7/8 " —16UN Male, Angled	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	300V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80°C	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	300V	300V	300V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG
	Cross section	1.5mm ²	1.5mm ²	1.5mm ²
	Wiring list	PE,GN/YE 2.BN 3.BU	1.BK 2.BU PE,GN/YE 3.BN 4.WH	1.BK 2.BU PE,GN/YE 4.BN 5.WH
Description		Order NO .	Order NO .	Order NO .
PVC	1m	PM-MC-03P-MM-SR8A01-00A(H)	PM-MC-04P-MM-SR8A01-00A(H)	PM-MC-05P-MM-SR8A01-00A(H)
	3m	PM-MC-03P-MM-SR8A03-00A(H)	PM-MC-04P-MM-SR8A03-00A(H)	PM-MC-05P-MM-SR8A03-00A(H)
	5m	PM-MC-03P-MM-SR8A05-00A(H)	PM-MC-04P-MM-SR8A05-00A(H)	PM-MC-05P-MM-SR8A05-00A(H)
	Customized	*****	*****	*****
PUR	1m	PM-MC-03P-MM-SR8B01-00A(H)	PM-MC-04P-MM-SR8B01-00A(H)	PM-MC-05P-MM-SR8B01-00A(H)
	3m	PM-MC-03P-MM-SR8B03-00A(H)	PM-MC-04P-MM-SR8B03-00A(H)	PM-MC-05P-MM-SR8B03-00A(H)
	5m	PM-MC-03P-MM-SR8B05-00A(H)	PM-MC-04P-MM-SR8B05-00A(H)	PM-MC-05P-MM-SR8B05-00A(H)
	Customized	*****	*****	*****

7/8 " —16UN Male Overmolded
with Cable Plug,Single end,
Shielded,Straight.

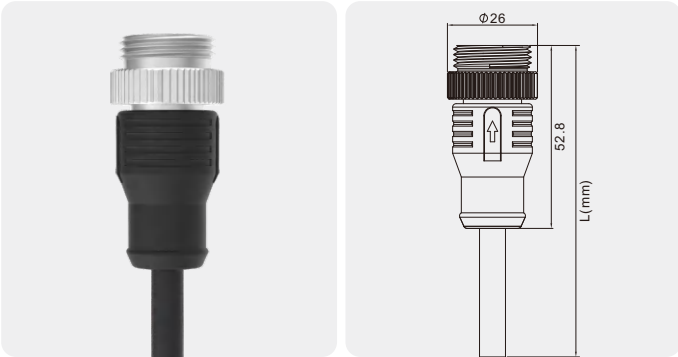


Technical Data

Series	7/8 " —16UN Male, Straight	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	300V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Shielded
Ambient temperature	- 25 ~ + 80℃	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	300V	300V	300V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG
	Cross section	1.5mm²	1.5mm²	1.5mm²
	Wiring list	PE.GN/YE 2.BN 3.BU	1.BK 2.BU 3.BN 4.WH	1.BK 2.BU PE.GN/YE 4.BN 5.WH
Description		Order NO .	Order NO .	Order NO .
PVC	1m	PMSH-MC-03P-MM-SL8A01-00A(H)	PMSH-MC-04P-MM-SL8A01-00A(H)	PMSH-MC-05P-MM-SL8A01-00A(H)
	3m	PMSH-MC-03P-MM-SL8A03-00A(H)	PMSH-MC-04P-MM-SL8A03-00A(H)	PMSH-MC-05P-MM-SL8A03-00A(H)
	5m	PMSH-MC-03P-MM-SL8A05-00A(H)	PMSH-MC-04P-MM-SL8A05-00A(H)	PMSH-MC-05P-MM-SL8A05-00A(H)
	Customized			
PUR	1m	PMSH-MC-03P-MM-SL8B01-00A(H)	PMSH-MC-04P-MM-SL8B01-00A(H)	PMSH-MC-05P-MM-SL8B01-00A(H)
	3m	PMSH-MC-03P-MM-SL8B03-00A(H)	PMSH-MC-04P-MM-SL8B03-00A(H)	PMSH-MC-05P-MM-SL8B03-00A(H)
	5m	PMSH-MC-03P-MM-SL8B05-00A(H)	PMSH-MC-04P-MM-SL8B05-00A(H)	PMSH-MC-05P-MM-SL8B05-00A(H)
	Customized			

7/8 " —16UN Male Overmolded
with Cable Plug,Single end,
Shielded,Angled.

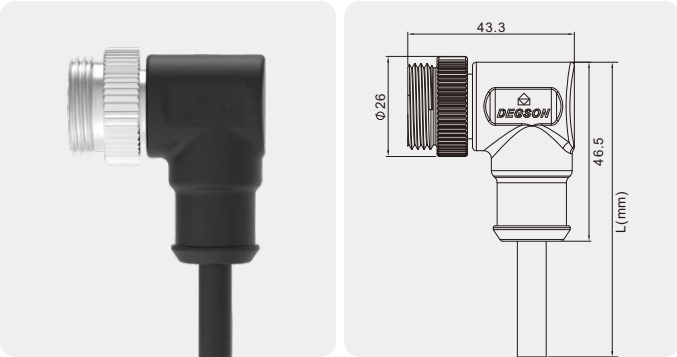


Technical Data

Series	7/8 " —16UN Male, Angled	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	300V max.	Seal	Silicone
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Shielded
Ambient temperature	- 25 ~ + 80℃	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	300V	300V	300V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG
	Cross section	1.5mm²	1.5mm²	1.5mm²
	Wiring list	PE.GN/YE 2.BN 3.BU	1.BK 2.BU 3.BN 4.WH	1.BK 2.BU PE.GN/YE 4.BN 5.WH
Description		Order NO .	Order NO .	Order NO .
PVC	1m	PMSH-MC-03P-MM-SR8A01-00A(H)	PMSH-MC-04P-MM-SR8A01-00A(H)	PMSH-MC-05P-MM-SR8A01-00A(H)
	3m	PMSH-MC-03P-MM-SR8A03-00A(H)	PMSH-MC-04P-MM-SR8A03-00A(H)	PMSH-MC-05P-MM-SR8A03-00A(H)
	5m	PMSH-MC-03P-MM-SR8A05-00A(H)	PMSH-MC-04P-MM-SR8A05-00A(H)	PMSH-MC-05P-MM-SR8A05-00A(H)
	Customized			
PUR	1m	PMSH-MC-03P-MM-SR8B01-00A(H)	PMSH-MC-04P-MM-SR8B01-00A(H)	PMSH-MC-05P-MM-SR8B01-00A(H)
	3m	PMSH-MC-03P-MM-SR8B03-00A(H)	PMSH-MC-04P-MM-SR8B03-00A(H)	PMSH-MC-05P-MM-SR8B03-00A(H)
	5m	PMSH-MC-03P-MM-SR8B05-00A(H)	PMSH-MC-04P-MM-SR8B05-00A(H)	PMSH-MC-05P-MM-SR8B05-00A(H)
	Customized			

7/8 " —16UN Female Panel Mount Receptacle ,Rear Mounting,with 0.5m wires.

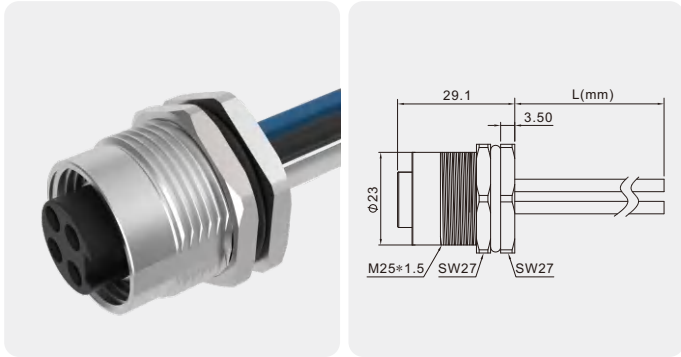


Technical Data

Series	7/8 " —16UN Female	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	300V max.	Seal	NBR
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80℃	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	300V	300V	300V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG
	Cross section	1.5mm ²	1.5mm ²	1.5mm ²
	Wiring list	PE.GN/YE 2.BN 3.BU	1.BK 2.BU PE.GN/YE 3.BN 4.WH	1.BK 2.BU PE.GN/YE 4.BN 5.WH
Description		Order NO .	Order NO .	Order NO .
M25*1.5	0.5m	SD-MC-03P-FF-SF8C50-00A(H)	SD-MC-04P-FF-SF8C50-00A(H)	SD-MC-05P-FF-SF8C50-00A(H)
	Customized			

7/8 " —16UN Female Panel Mount Receptacle ,Front Mounting,with 0.5m wires.

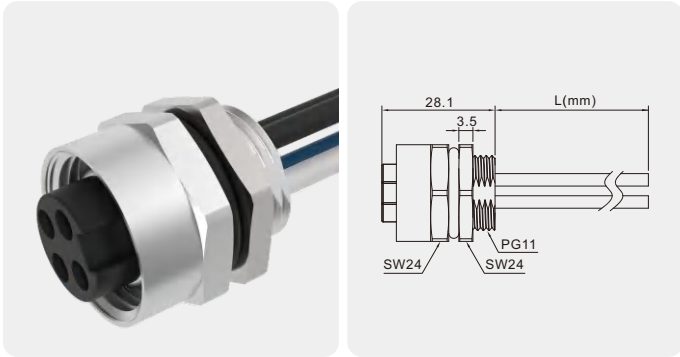


Technical Data

Series	7/8 " —16UN Female	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	300V max.	Seal	NBR
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80℃	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	300V	300V	300V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG
	Cross section	1.5mm ²	1.5mm ²	1.5mm ²
	Wiring list	PE.GN/YE 2.BN 3.BU	1.BK 2.BU PE.GN/YE 3.BN 4.WH	1.BK 2.BU PE.GN/YE 4.BN 5.WH
Description		Order NO .	Order NO .	Order NO .
PG11	0.5m	SD-MC-03P-FF-SH8A50-00A(H)	SD-MC-04P-FF-SH8A50-00A(H)	SD-MC-05P-FF-SH8A50-00A(H)
	Customized			

7/8 " —16UN Female Panel Mount Receptacle ,Front Mounting,with 0.5m wires.

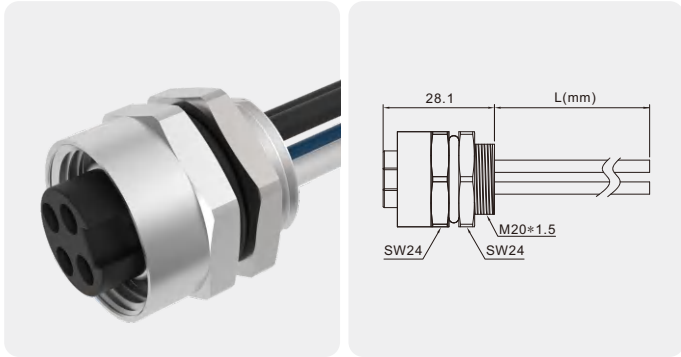


Technical Data

Series	7/8 " —16UN Female	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	300V max.	Seal	NBR
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80℃	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	300V	300V	300V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG
	Cross section	1.5mm ²	1.5mm ²	1.5mm ²
	Wiring list	PE.GN/YE 2.BN 3.BU	1.BK 2.BU PE.GN/YE 3.BN 4.WH	1.BK 2.BU PE.GN/YE 4.BN 5.WH
Description		Order NO .	Order NO .	Order NO .
M20*1.5	0.5m	SD-MC-03P-FF-SH8B50-00A(H)	SD-MC-04P-FF-SH8B50-00A(H)	SD-MC-05P-FF-SH8B50-00A(H)
	Customized			

7/8 " —16UN Male Panel Mount Receptacle ,Rear Mounting,with 0.5m wires.

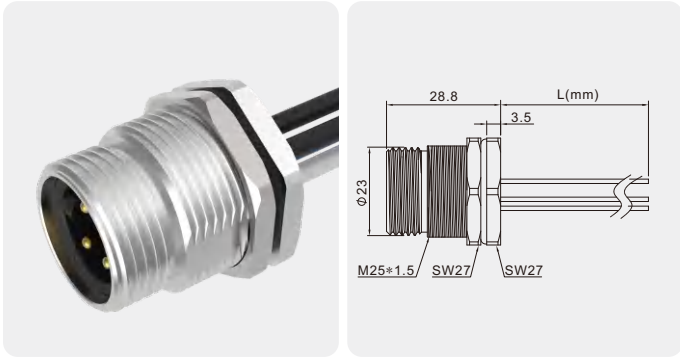


Technical Data

Series	7/8 " —16UN Male	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	300V max.	Seal	NBR
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80℃	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	300V	300V	300V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG
	Cross section	1.5mm ²	1.5mm ²	1.5mm ²
	Wiring list	PE.GN/YE 2.BN 3.BU	1.BK 2.BU PE.GN/YE 3.BN 4.WH	1.BK 2.BU PE.GN/YE 4.BN 5.WH
Description		Order NO .	Order NO .	Order NO .
M25*1.5	0.5m	SD-MC-03P-MM-SF8C50-00A(H)	SD-MC-04P-MM-SF8C50-00A(H)	SD-MC-05P-MM-SF8C50-00A(H)
	Customized			

7/8 " —16UN Male Panel Mount Receptacle ,Front Mounting,with 0.5m wires.

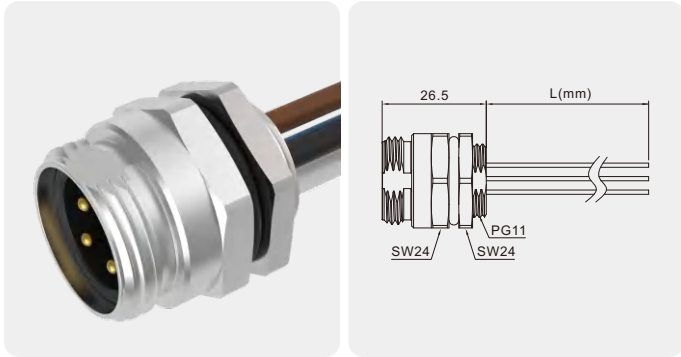


Technical Data

Series	7/8 " —16UN Male	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	300V max.	Seal	NBR
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80℃	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	300V	300V	300V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG
	Cross section	1.5mm ²	1.5mm ²	1.5mm ²
	Wiring list	PE.GN/YE 2.BN 3.BU	1.BK 2.BU PE.GN/YE 3.BN 4.WH	1.BK 2.BU PE.GN/YE 4.BN 5.WH
Description		Order NO .	Order NO .	Order NO .
PG11	0.5m	SD-MC-03P-MM-SH8A50-00A(H)	SD-MC-04P-MM-SH8A50-00A(H)	SD-MC-05P-MM-SH8A50-00A(H)
	Customized			

7/8 " —16UN Male Panel Mount Receptacle ,Front Mounting,with 0.5m wires.

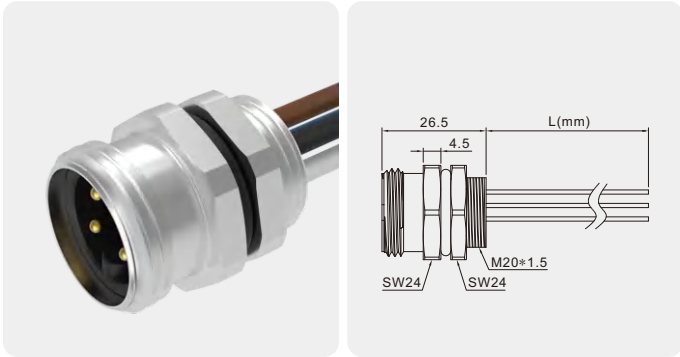


Technical Data

Series	7/8 " —16UN Male	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	300V max.	Seal	NBR
Insulation resistance	≥100MΩ	Cable jacket material	PUR / PVC
Contact resistance	≤5mΩ	Shielding	Unshielded
Ambient temperature	- 25 ~ + 80℃	Mechanical life	> 100 mating cycles
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	300V	300V	300V
Wire/Cable	Wire gauge	16AWG	16AWG	16AWG
	Cross section	1.5mm ²	1.5mm ²	1.5mm ²
	Wiring list	PE.GN/YE 2.BN 3.BU	1.BK 2.BU PE.GN/YE 3.BN 4.WH	1.BK 2.BU PE.GN/YE 4.BN 5.WH
Description		Order NO .	Order NO .	Order NO .
M20*1.5	0.5m	SD-MC-03P-MM-SH8B50-00A(H)	SD-MC-04P-MM-SH8B50-00A(H)	SD-MC-05P-MM-SH8B50-00A(H)
	Customized			

7/8 " —16UN Female Panel Mount Receptacle ,Front Mounting,Unshielded,PCB Soldering.

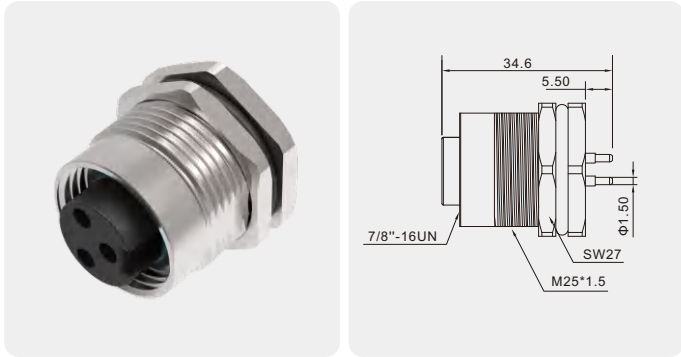


Technical Data


Series	7/8 " —16UN Male	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	600V max.	Seal	NBR
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 85℃	—	—
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	600V	600V	600V
Description		Order NO .	Order NO .	Order NO .
M25*1.5	0.5m	SP-MC-03P-FF-SF8003-00A(H)	SP-MC-04P-FF-SF8003-00A(H)	SP-MC-05P-FF-SF8003-00A(H)
	Customized			


Dimension Figure



PCB Layout




PCB Layout



PCB Layout

7/8 " —16UN Female Panel Mount Receptacle ,Rear Mounting,Unshielded, PCB Soldering.

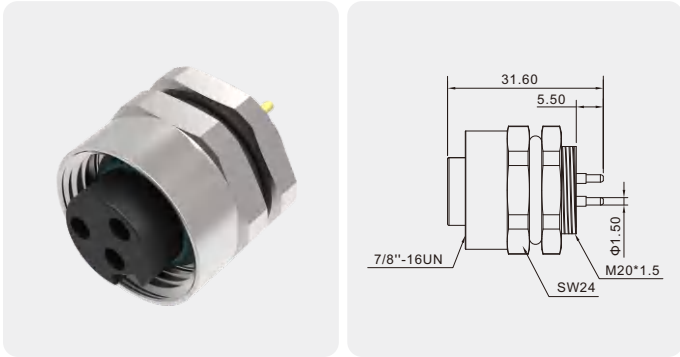


Technical Data


Series	7/8 " —16UN Male	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	600V max.	Seal	NBR
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 85℃	—	—
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	600V	600V	600V
Description		Order NO .	Order NO .	Order NO .
M25*1.5	0.5m	SP-MC-03P-FF-SF8002-00A(H)	SP-MC-04P-FF-SF8002-00A(H)	SP-MC-05P-FF-SF8002-00A(H)
	Customized			


Dimension Figure



PCB Layout




PCB Layout



PCB Layout

7/8 " —16UN Male Panel Mount Receptacle,Front Mounting,Unshielded, PCB Soldering.

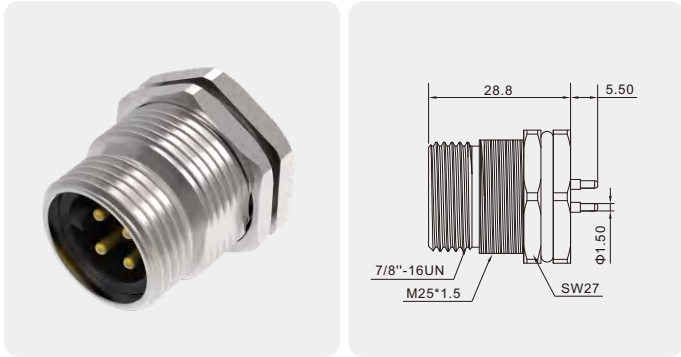


Technical Data


Series	7/8 " —16UN Male	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	600V max.	Seal	NBR
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 85℃	—	—
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	600V	600V	600V
Description		Order NO .	Order NO .	Order NO .
M25*1.5	0.5m	SP-MC-03P-MM-SF8003-00A(H)	SP-MC-04P-MM-SF8003-00A(H)	SP-MC-05P-MM-SF8003-00A(H)
	Customized			


Dimension Figure



PCB Layout




PCB Layout



PCB Layout

7/8 " —16UN Male Panel Mount Receptacle,Rear Mounting,Unshielded, PCB Soldering.

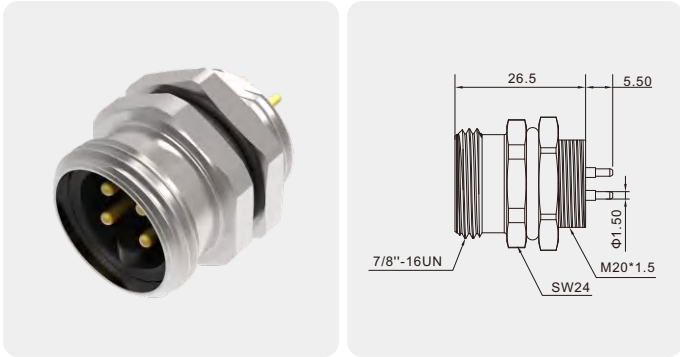


Technical Data


Series	7/8 " —16UN Male	Contact carriers material	PA
Number of Pins	03,04,05 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	13A max.	Metal of nut	Copper Alloy with Nickel Plated
Rated voltage	600V max.	Seal	NBR
Insulation resistance	≥100MΩ	Shielding	Unshielded
Contact resistance	≤5mΩ	Mechanical life	> 100 mating cycles
Ambient temperature	- 25 ~ + 85℃	—	—
IP Class	IP68	—	—
—	—	—	—

Number of Pins		03 Pin	04 Pin	05 Pin
Coding	Coded	A-Coded	A-Coded	A-Coded
	Front View			
Rated current	A.	13A	13A	9A
Rated voltage	V.	600V	600V	600V
Description		Order NO .	Order NO .	Order NO .
M25*1.5	0.5m	SP-MC-03P-MM-SF8002-00A(H)	SP-MC-04P-MM-SF8002-00A(H)	SP-MC-05P-MM-SF8002-00A(H)
	Customized			


Dimension Figure



PCB Layout



PCB Layout



PCB Layout



Advantages / Features

- Special connector for servo motor.
- High waterproof class IP67.
- Suitable for high temperature and high frequency vibration environments.
- Quick and easy to assemble, selfcontained grounding function can be freely choosed.
- The servo motor is upgraded to replace.

2 Pin Servo connector.




Technical Data


Series	Servo connector	Contact carriers material	PA , PBT
Number of Pins	2 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	7A	Seal	Silicone
Rated voltage	250V	Mechanical life	> 100 mating cycles
Insulation resistance	> 100MΩ	—	—
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 20 ~ + 105°C	—	—
IP Class	IP67	—	—

Servo Connector Part Number

Servo Connector Part Number Reference

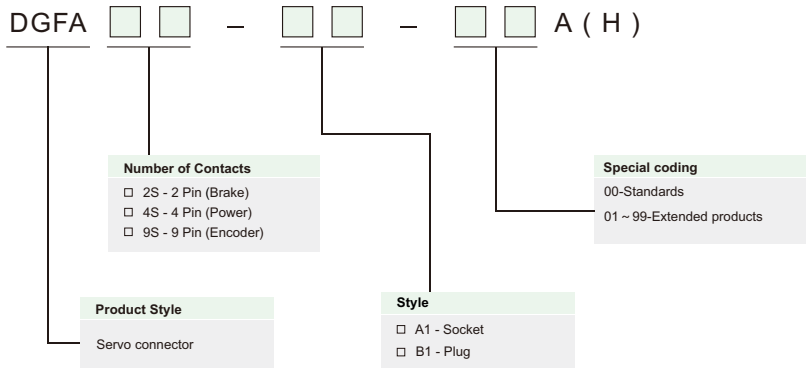


Servo Connector Crimp contact Part Number Reference

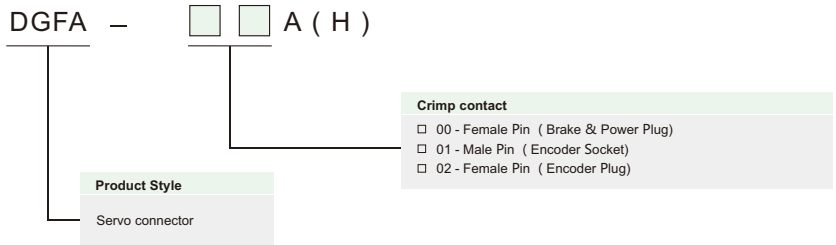

For example:
1. DGFA2S-A1-00A(H)
Details: 2 Pin(Brake) Servo connector socket .
Servo connector all specifications waterproof rating defaults to IP67.

Dimension Figure

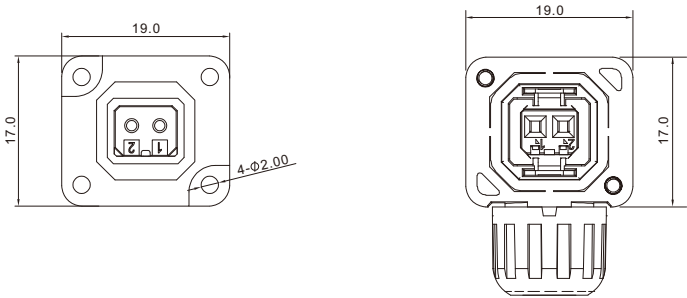

4 Pin Servo connector.




Technical Data

Series	Servo connector	Contact carriers material	PA , PBT
Number of Pins	4 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	7A	Seal	Silicone
Rated voltage	250V	Mechanical life	> 100 mating cycles
Insulation resistance	> 100MΩ	—	—
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 20 ~ + 105℃	—	—
IP Class	IP67	—	—

Order NO .	DGFA4S-A2-00A(H)	DGFA4S-B1-00A(H)	DGFA-00A(H)
Front View			

Dimension Figure

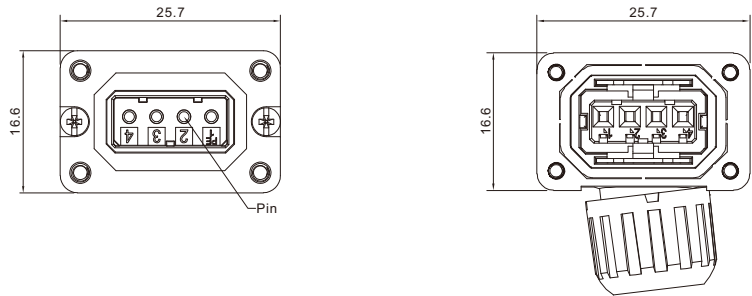

9 Pin Servo connector.




Technical Data

Series	Servo connector	Contact carriers material	PA
Number of Pins	9 Pin	Contact material	Copper Alloy, Gold-plated
Rated Current	1A	Seal	Silicone
Rated voltage	10V	Mechanical life	> 100 mating cycles
Insulation resistance	> 100MΩ	—	—
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 20 ~ + 105℃	—	—
IP Class	IP67	—	—

Order NO .	DGFA9S-A1-00A(H)	DGFA-01A(H)	DGFA9S-B1-00A(H)	DGFA-02A(H)
Front View				

Dimension Figure

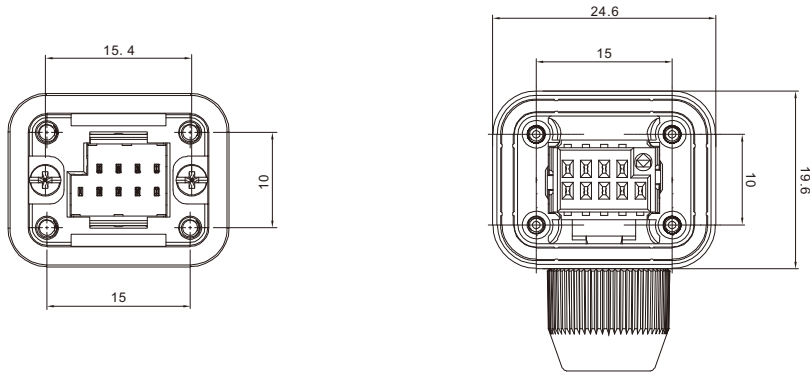



Advantages / Features

- Single-line input, multi-line output.
- Cost saving, easy installation.
- Waterproof rating: IP67/684.
- Widely used in industrial automation, rail transit and other industries.



M12 T-type distributor, M12 A code
Female X1 M12 A code
Male/Female X1.




Technical Data


Standard	IEC 61076	Contact carriers material	PU
Series	M12	Contact material	Copper Alloy, Gold-plated
Number of Pins	03, 04, 05, 08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	- 25 ~ + 80°C	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin		04 Pin		05 Pin		08 Pin	
Coding	Coded	A-Coded		A-Coded		A-Coded		A-Coded	
	Front View								
Rated current	A.	4A		4A		4A		2A	
Rated voltage	V.	250V		250V		60V		30V	
Description		Order NO .		Order NO .		Order NO .		Order NO .	
—		FT-M12A-03F-M12A-03MH-K3-0200		FT-M12A-04F-M12A-04MH-K4-0200		FT-M12A-05F-M12A-05MH-K5-0200		FT-M12A-08F-M12A-08MH-K8-0200	


Size

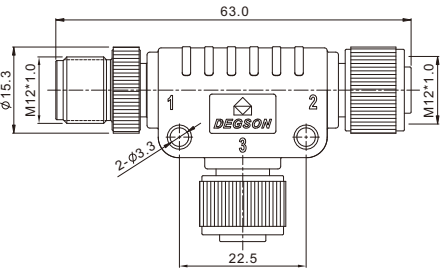

Circuit schematic

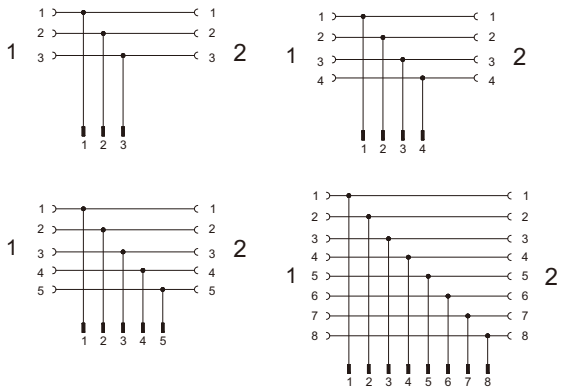

The coding rule of M12, M8 distributor

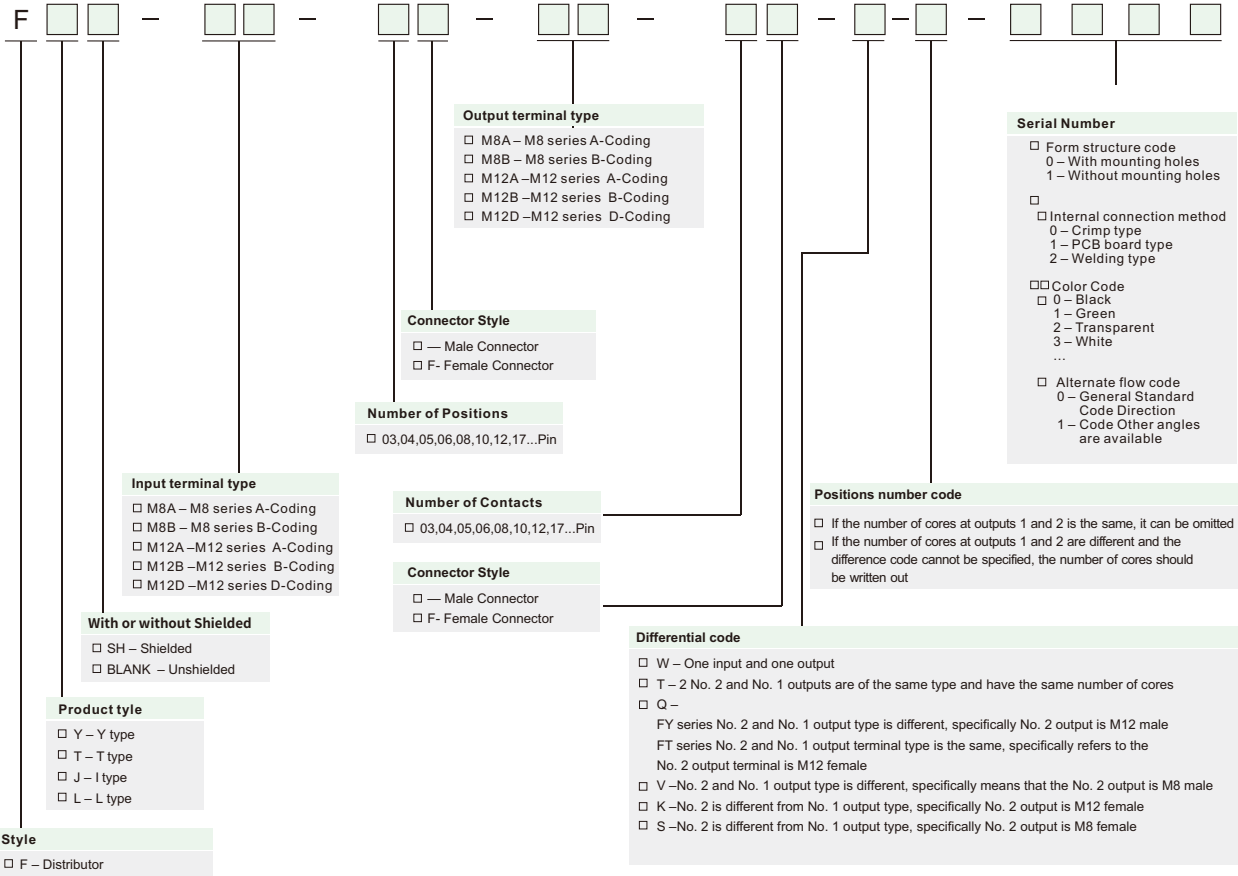

For example:
1.FY-M12A-05M-M12A-05F-Q4-0100
Stand for: Unshielded Y-distributor, Inputs are M12 series A-Code 5 pole male, Output No. 1 is M12 series A-Code 5-pole female terminal, Output No.2 is M12 Series A-Code 4 pole male, The internal connection is PCB type, there is a mounting hole, the color is black.

M12 T-type distributor,M12 A code MaleX1
M12 A code FemaleX2.




Technical Data


Standard	IEC 61076	Contact carriers material	PU
Series	M12	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Unshielded
Insulation resistance	≥100M Ω	Mechanical life	> 100 mating cycles
Contact resistance	≤5m Ω	—	—
Ambient temperature	−25 ~ +80℃	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin		04 Pin		05 Pin		08 Pin	
Coding	Coded	A-Coded		A-Coded		A-Coded		A-Coded	
	Front View								
Rated current	A.	4A		4A		4A		2A	
Rated voltage	V.	250V		60V		30V			
Description		Order NO .		Order NO .		Order NO .		Order NO .	
—		FT-M12A-03M-M12A-03F-Q-0200		FT-M12A-04M-M12A-04F-Q-0200		FT-M12A-05M-M12A-05F-Q-0200		FT-M12A-08M-M12A-08F-Q-0200	

Size

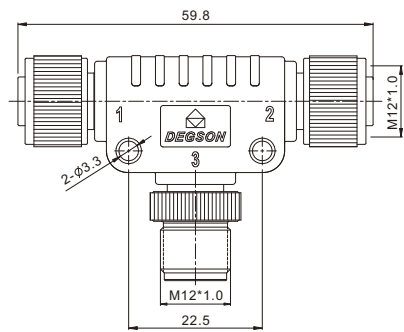

Circuit schematic

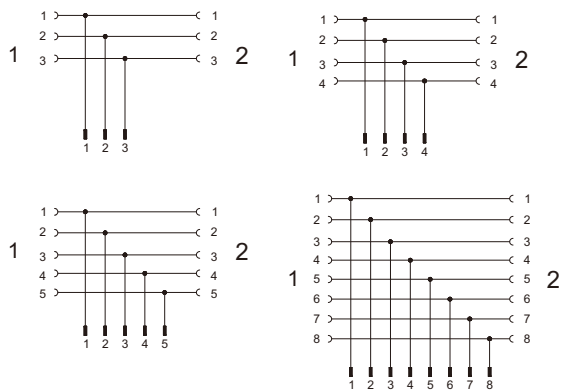

M12 T-type distributor,M12 A code FemaleX1
M12 A code MaleX2.




Technical Data


Standard	IEC 61076	Contact carriers material	PU
Series	M12	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Unshielded
Insulation resistance	≥100M Ω	Mechanical life	> 100 mating cycles
Contact resistance	≤5m Ω	—	—
Ambient temperature	−25 ~ +80℃	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin		04 Pin		05 Pin		08 Pin	
Coding	Coded	A-Coded		A-Coded		A-Coded		A-Coded	
	Front View								
Rated current	A.	4A		4A		4A		2A	
Rated voltage	V.	250V		60V		30V			
Description		Order NO .		Order NO .		Order NO .		Order NO .	
—		FY-M12A-03F-M12A-03M-T-0100		FY-M12A-04F-M12A-04M-T-0100		FY-M12A-05F-M12A-05M-T-0100		FY-M12A-08M-M12A-08F-T-0100	

Size

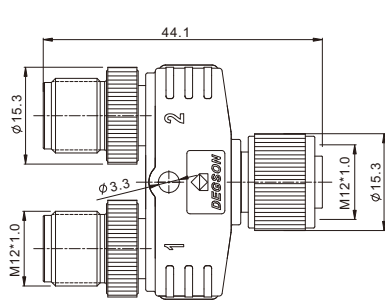

Circuit schematic

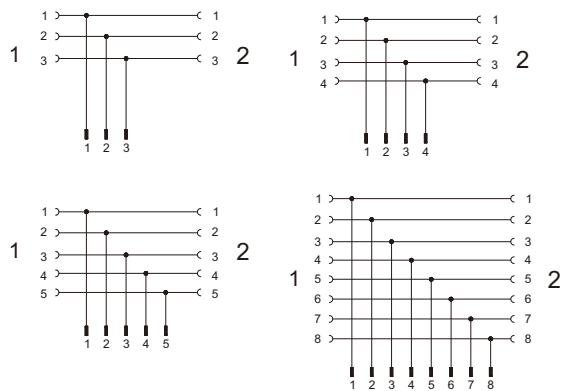

M12 Y-type distributor,M12 A code MaleX1
M12 A code FemaleX2.




Technical Data


Standard	IEC 61076	Contact carriers material	PU
Series	M12	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04,05,08 Pin	Metal of nut	Zinc Alloy with Nickel Plated
Rated Current	4A max.	Seal	Silicone
Rated voltage	250V max.	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	−25 ~ +80℃	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin		04 Pin		05 Pin		08 Pin	
Coding	Coded	A-Coded		A-Coded		A-Coded		A-Coded	
	Front View								
Rated current	A.	4A		4A		4A		2A	
Rated voltage	V.	250V		250V		60V		30V	
Description		Order NO .		Order NO .		Order NO .		Order NO .	
—		FY-M12A-03F-M12A-03M-Q-0100		FY-M12A-04F-M12A-04M-Q-0100		FY-M12A-05F-M12A-05M-Q-0100		FY-M12A-08M-M12A-08F-Q-0100	

Size

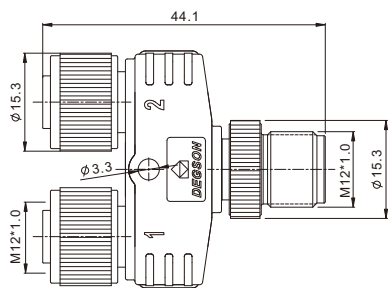

Circuit schematic

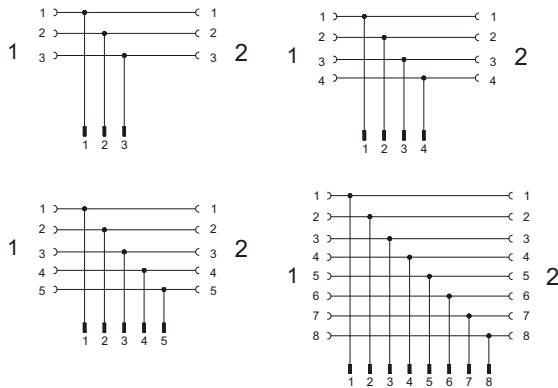

M8 Y-type distributor,M8 A code MaleX1
M8 A code FemaleX2.




Technical Data


Standard	IEC 61076	Contact carriers material	PU
Series	M8	Contact material	Copper Alloy, Gold-plated
Number of Pins	03,04 Pin	Metal of nut	Copper Alloy with Nickel Plated
Rated Current	3A	Seal	Silicone
Rated voltage	60V	Shielding	Unshielded
Insulation resistance	≥100MΩ	Mechanical life	> 100 mating cycles
Contact resistance	≤5mΩ	—	—
Ambient temperature	−25 ~ +80℃	—	—
IP Class	IP68	—	—

Number of Pins		03 Pin		04 Pin		03, 04 Pin	
Coding	Coded	A-Coded		A-Coded		A-Coded	
	Front View						
Rated current	A.	3A		3A		3A	
Rated voltage	V.	60V		60V		60V	
Description		Order NO .		Order NO .		Order NO .	
—		FY-M8A-03M-M8A-03F-T-0100		FY-M8A-04M-M8A-04F-T-0100		FY-M8A-04M-M8A-03F-T-0100	

Size

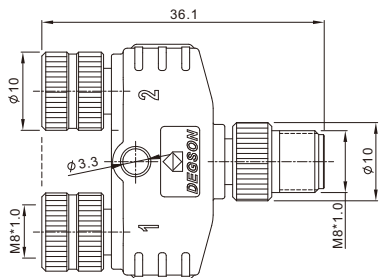

Circuit schematic

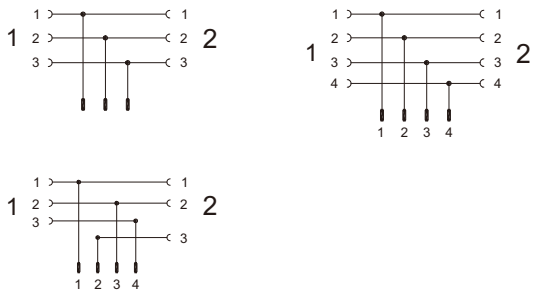

FIELD OF APPLICATION


DEGSON connectors are widely used in robot, industrial automation, CNC equipment, textile machinery, rail transit, monitor and control unit, energy, communicate and so on various equipments requiring electrical, data and signal connection.



Transportation
technology



CNC equipment

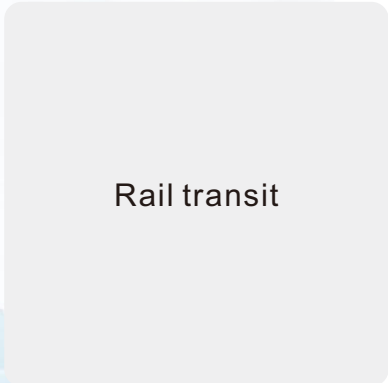

Rail transit




Industrial automation



Energy



Robot

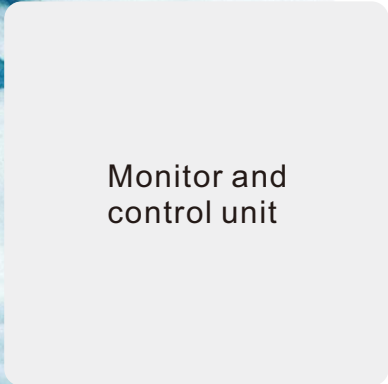

Monitor and
control unit



Communicate

ENVIRONMENTAL POLICY

DEGSON realizes system regulation without lead in 2005 and has been granted ISO14001 in 2006. All the products conform to the European ROHS requirement.

DEGSON realizes the importance to protect environment resources, selfconsciously meets environment protection requirements for products and regards it as the responsibility.

Thus, we have made the following environment strategic policy :

- 1.To meet customers'demands and obey the national and local laws and regulations as well as other environmental protection requirements.
- 2.Take environmental protection as one criterion for continuing development of our company. Insist on fully development of quality, benefit and environmental protection.
- 3.Fully considering the factors which will influence the environment in the processes of product development, manufacturing, material usage and waste processing, establish management system of waste in order to improve the environment of our company.
- 4.To increase the employees' consciousness of environmental protection through training and to realize the continuing improvement of environment management system and the ability of environmental protection.
- 5.To make full use of resources and to decrease consumption of material in order to save energy.
- 6.To promise to our partners and society that we will make contribution to environment protection. There is only one Earth for our humanity.
- 7.To strive for making conservation-oriented and environment-friendly products through continuous innovation and developing new materials and technology.