

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designer registrations. 除专利、实用新型、外观设计、发明专利外，本公司保留对涉及发明、实用新型及外观设计专利的所有权利。

FOR-1755 Rev.1.6

2

3



4

5

6

未注公差/General tolerances(mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

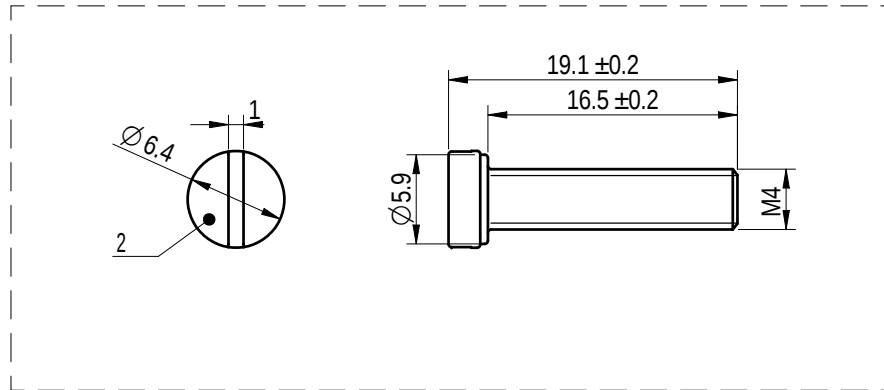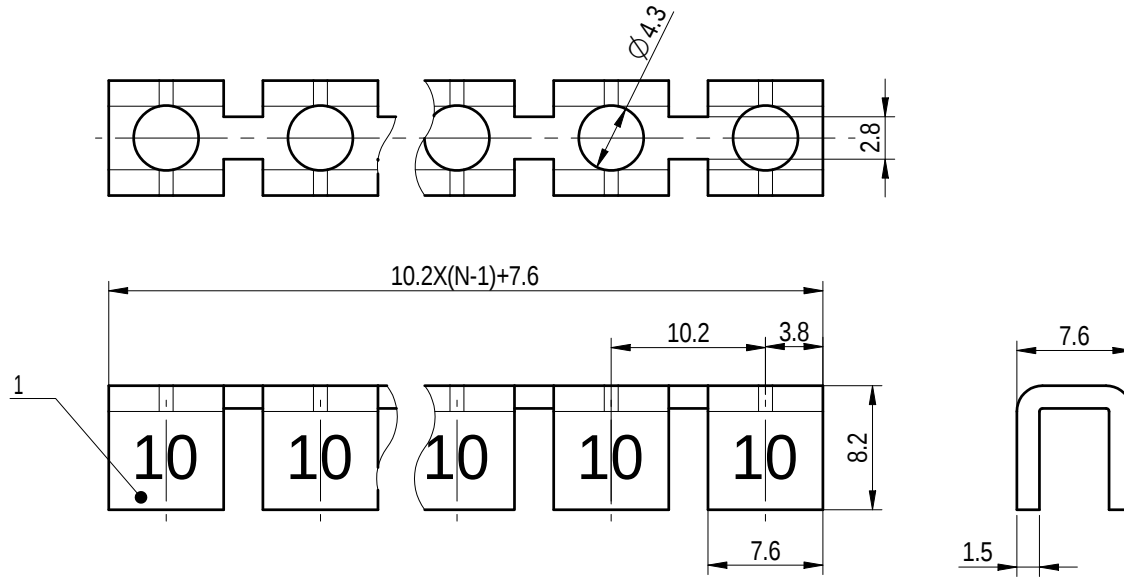

Current carrier and screws should be packed individually,
which must be put in the same box

2	Screw	Copper alloy	Ni plated
1	Current carrier	Copper	Sn plated
ITEM	NAME OF PART	MATERIAL	NOTES

间距/Pitch(mm)/线数范围/Poles	10.2/N=02~10P
符合RoHS环保要求/Conform to RoHS	Yes

		MATERIAL: /	SURFACE/COLOR: /	
APPD: PengM		2022.06.17		
CHKD: GaoWG		2022.06.17		
DRFT: XieXD		2022.06.17		
DRAWING NO.		TYPE		DRAWING STATUS
/		CUSTOMER DRAWING		/
SCALE		SHEET		
2:1		1/1		

00	/	/	XieXD	2022.06.17
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6