


未注公差/General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°



A

A

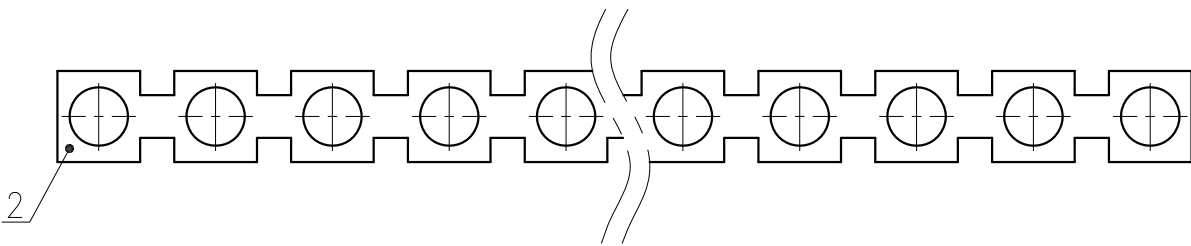


B

B

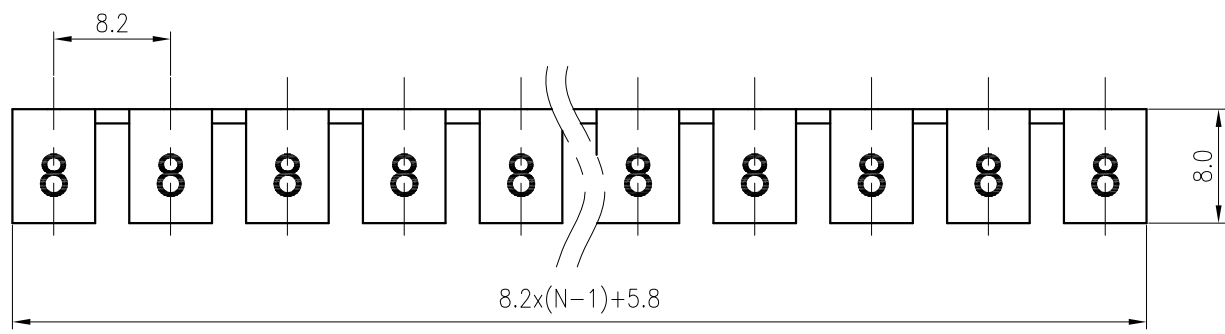

C

C

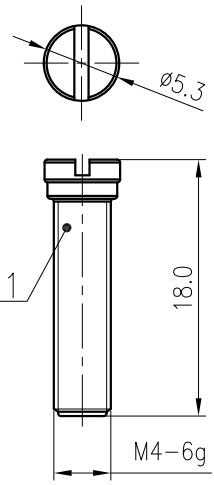

D

D

2	Current carrier	Copper	Sn Plated
1	Screws	Copper alloy	Ni Plated
ITEM	PART NAME	MATERIAL	NOTES
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M4,1.2/10.53	
间距/Pitch(mm)/线数范围/Poles		8.2/N=02P~10P	
使用温度范围/Operating temperature(°C)		-40~+105	
载流体与螺丝分开包装于同一内盒中/Current carrier and Screws should be packed individually,which must be put in the same box			
符合RoHS环保要求/Conform to RoHS			Yes

MATERIAL: /		SURFACE: /	
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: Li GL 2020.06.04		NAME: FBIXX-8	
CHKD: Mao J 2020.06.04			
DRFT: Chen K 2020.06.04		DRAWING NO.: FBIXX-8-C01	
 SIZE: A4		 mm (inch)	
		TYPE: CUSTOMER DRAWING	
		SCALE: 2:1	
		SHEET 1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------