



未注公差/General tolerances(mm)

0 ~3	>3 ~6	>6 ~10	>10 ~18	>18 ~30	>30 ~50	>50 ~80	>80 ~120	>120 ~180	>180 ~250	>250 ~315	>315 ~400	>400 ~500	>500	0.1/10 ±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	


A

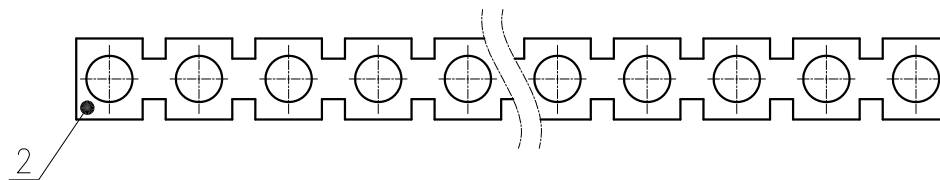

B

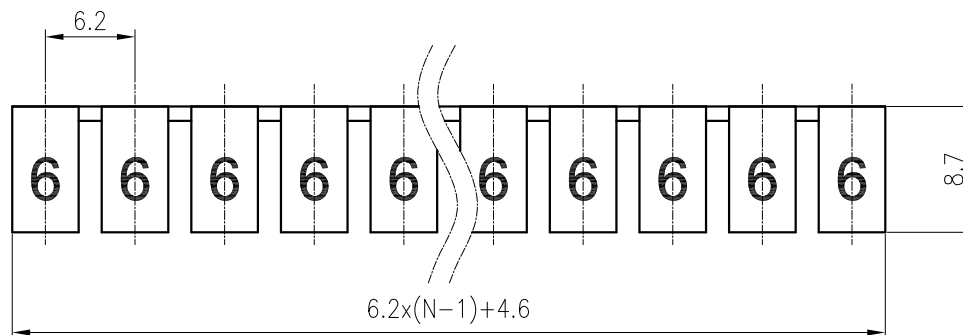

C

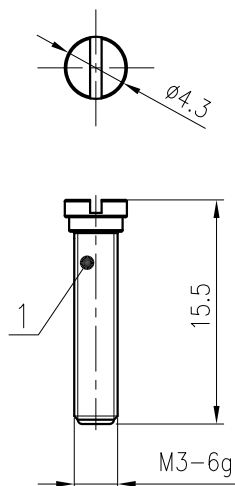

D

2	Current carrier	Copper	Sn Plated
1	Screws	Copper alloy	Ni Plated
ITEM	PART NAME	MATERIAL	NOTES
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3.0.5/4.43	
间距/Pitch(mm)/线数范围/Poles		6.2/N=02P~10P	
使用温度范围/Operating temperature(℃)		-40~+105	
载流体与螺丝分开包装于同一内盒中/Current carrier and Screws should be packed individually,which must be put in the same box			
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: /		SURFACE: /	
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: Li GL 2020.06.04		NAME: FBIXX-6	
CHKD: Mao J 2020.06.04			
DRFT: Chen K 2020.06.04		DRAWING NO.: FBIXX-6-C01	
		REV	T1
	SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING
		SCALE: 2:1	SHEET 1/1