

Transfer or duplication of this document as well as the utilization or reproduction of its contents is prohibited without the written authorization of the manufacturer. All rights reserved for patent.
本文件及其中所载之数据或内容之复制或再行利用，须经本公司书面许可。未经许可擅自复制或再行利用，将构成侵权。本公司保留所有权利。

FOR-1759 Rev.1.5

2

3

4







5

6


7

8

未注公差/General tolerances(mm)													0.1/10 ±2°
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

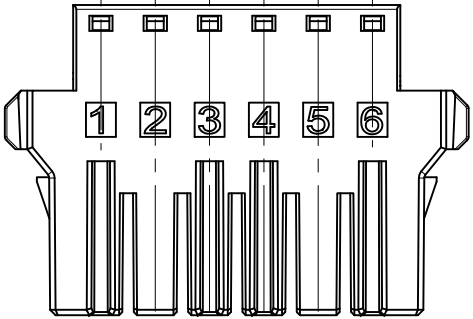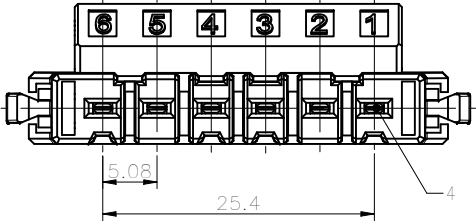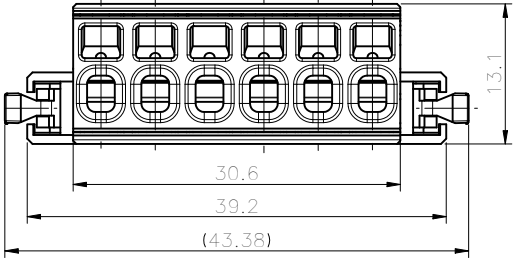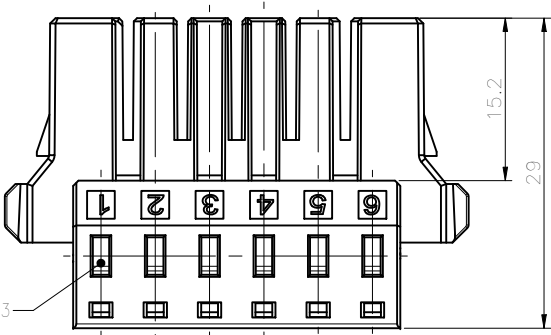

Application tool (optional) ②



Note:
The A&Z (H) in the name means: A(H) and Z(H).

4	Clamp	Copper alloy	Ni Plated /Au Plated
3	Spring	Stainless steel	/
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/14.5	/	300/10
IEC 标准/IEC Standard:	III/3	III/2	II/2
过压类别/Overvoltage Category/污染等级/Pollution Degree	160/16	160/16	320/16
额定电压/电压/Rated Voltage(V)/Current(A)	4	4	4
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	28-14	0.2-2.5	8-9
线径范围(硬线和软线)/Wire Range(rigid and flexible) (AWG/mm ²)	4-9	-40-105℃	Yes
使用温度范围/Operating temperature(°C)	-40-105℃	Yes	Yes
符合 RoHS 环保要求/Conform to RoHS	Yes	Yes	Yes

DIEGSON		MATERIAL:		SURFACE/COLOR:	
APPD: 兰春华	2022.08.23	NAME:	9EDGKG-5.08-06P-1Y-00A&Z(H)	MAT NO./REV: - / 01	MAT STATUS: 批量
CHKD: 黄耀志	2022.08.23	DRAWING NO.	200059007	TYPE	CUSTOMER DRAWING
DRFT: 周伟德	2022.08.23	DRAWING STATUS	已发布	SCALE	2:1
REV	ECN	DESCRIPTION	DATE	SHEET	1/1

02	REV	ECN	DESCRIPTION	周伟德	2022.08.23
01	REV	ECN	DESCRIPTION	周伟德	2022.08.23

1

2

3

4

5

6

7

8