

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利等明确标注外, 未经许可, 不得复制或传播。 除专利等明确标注外, 未经许可, 不得复制或传播。 除专利等明确标注外, 未经许可, 不得复制或传播。

FOR-1755 Rev.1.7

2







3

4

5

6

尺寸公差(mm)					0.05/10 ±1°
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	

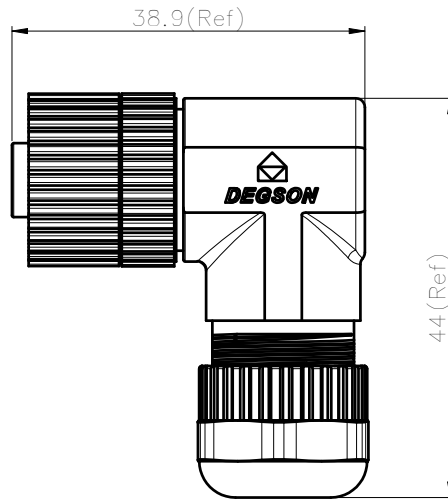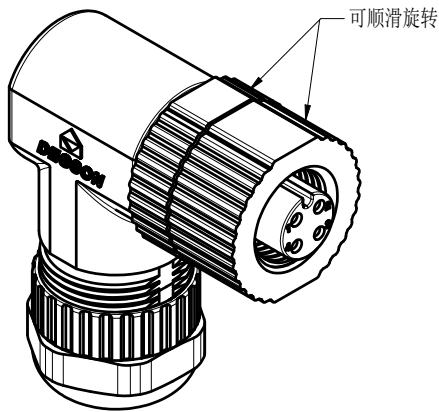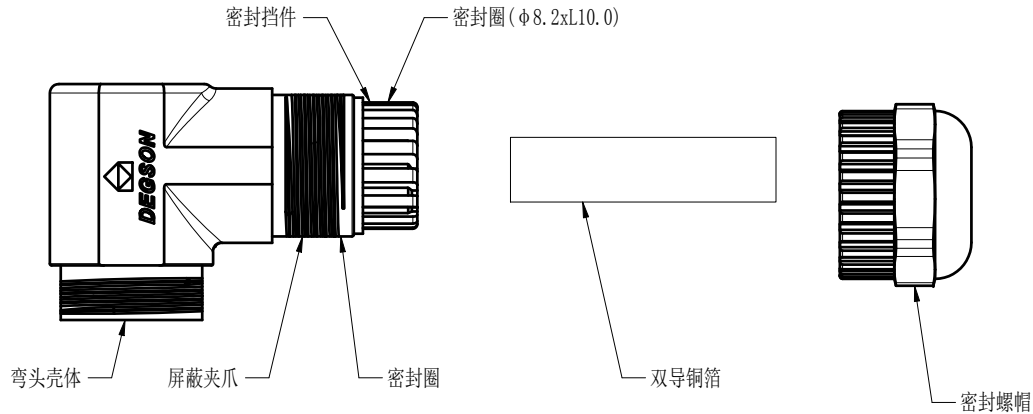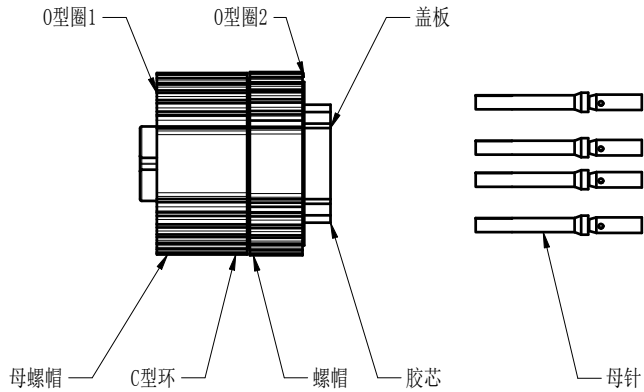

Pin Assignments
Front View

技术要求/Technical requirements:	
额定电压/Rated Voltage/Current	250V AC/4A
绝缘电阻/Insulate Resistance	>100MΩ
耐压/Withstanding Voltage	1500V AC 1min
防护等级/Ingress Protection	IP67
插拔寿命/Insertion/Pullout Times	100 Cycles
插拔力/Insertion/Pullout Force	<30N
使用温度范围/Operating temperature(°C)	-25~+105
重点管控符号/Key controlled symbol	*
包装规范/Packaging specification	SOP-Y-3383
接线方式/Terminal	Crimping
螺丝扭矩/Tightening torque(N·m/Lb.in)	M12x1.0, 3~4kgf.cm
	M17x1.0, 4~6kgf.cm
线径范围/Wire range(AWG/mm²)	24~20/0.25~0.5

			MATERIAL:		SURFACE/COLOR:			
			MAT NO. /REV: 20030002378-1 / 01		MAT STATUS: 小批量			
APPD:			NAME					
CHKD:			PCSH-M12A-04P-FF-SR7002-00A (H)					
DRFT:			DRAWING NO.		TYPE	DRAWING STATUS	SCALE	SHEET
	 A4		200108818		CUSTOMER DRAWING	work	2:1	1/1

00	ECN	DESCRIPTION	DRFT	DATE
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6