
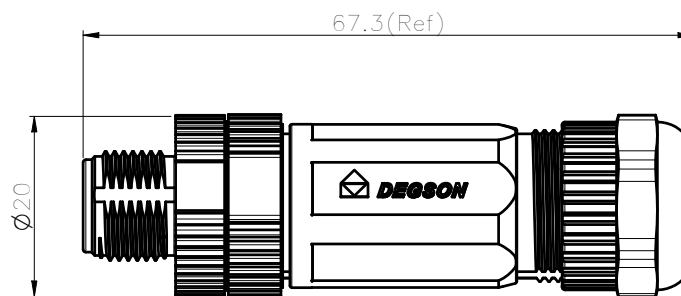



D

技术要求/Technical requirements:	
额定电压/Current	250V AC/4A
绝缘电阻/Insulate Resistance	>100MΩ
耐压/Withstanding Voltage	1500V AC 1min
防护等级/Ingress Protection	IP67
插拔寿命/Insertion/Pullout Times	100 Cycles
插拔力/Insertion/Pullout Force	<30N
使用温度范围/Operating temperature(° C)	-25°+105
重点管控符号/Key controlled symbol	*
包装规范/Packaging specification	SOP-Y-3383
接线方式/Terminal	Crimping
螺丝扭矩/Tightening torque(N・m/Lb.in)	M12x1.0, 3~4kgf.cm M17x1.0, 4~6kgf.cm
线径范围/Wire range(AWG/mm²)	24~20/0.25~0.5

		MATERIAL:		SURFACE/COLOR:		
		MAT NO./REV: 20030002375-1 / 00		MAT STATUS: 批量		
APPD:		NAME PCSH-M12A-04P-MM-SL7002-00A (H)				
CHKD:						
DRAFT:		DRAWING NO. 200108793	TYPE CUSTOMER DRAWING	DRAWING STATUS work	SCALE 2:1	SHEET 1/1
						

00				
REV	ECN	DESCRIPTION	DRFT	DATE