
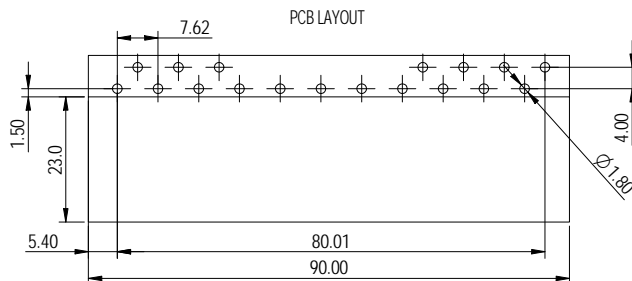
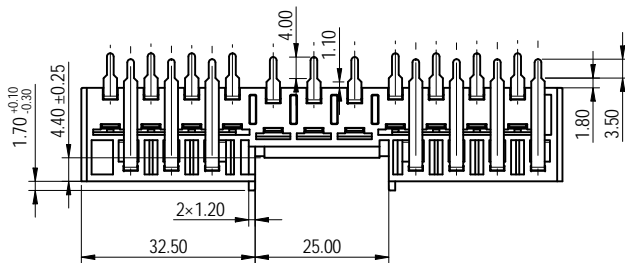
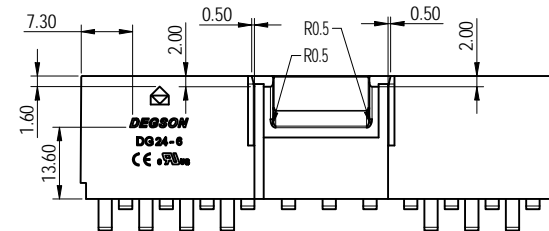

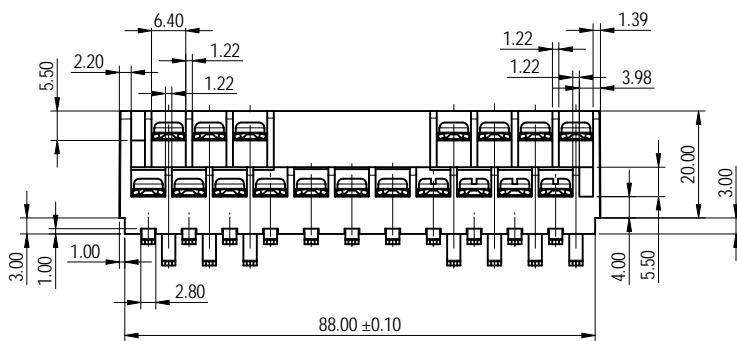
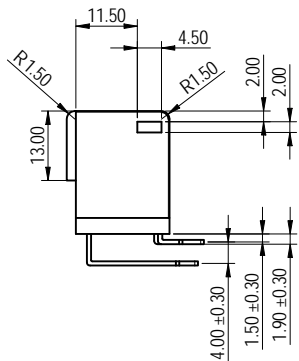


公差/General tolerances (mm)													D	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	N
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2

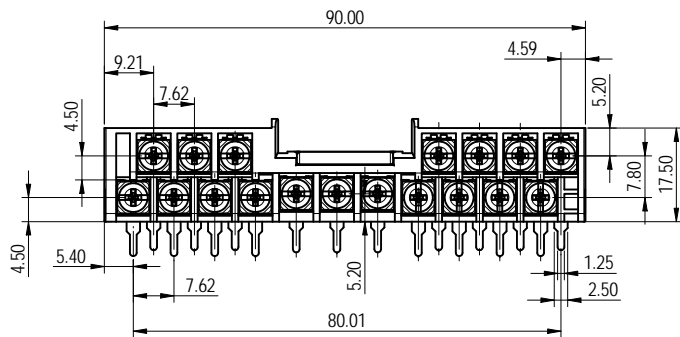

Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw	Steel	M3/Ni Plated
3	Pin header2	Copper alloy	Sn Plated
2	Pin header1	Copper alloy	Sn Plated
1	Housing	PBT+GF	UL94V-0

UL 标准/UL Standard	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/10	/	300/10
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3: 0.71~1.02/ 6.3~9.0		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	24~14		
线数范围/Poles	N=18P		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		



MATERIAL:	SURFACE/COLOR:
MAT NO./REV: / 00	MAT STATUS: 批量

APPD: 蓝黄凡	2023.01.05	NAME	DG24-6-18P-1Y-00A&Z(H)			
CHKD: 曹利影	2023.01.05	DRAWING NO.	200126500	TYPE	CUSTOMER DRAWING	
DRFT: 孙科豪	2023.01.05	DRAWING STATUS	已发布	SCALE	1:1	
REV	ECN	DESCRIPTION	DRFT	DATE	SHEET	
00					1/1	

Transfer or duplication of this document as well as the utilization of its contents without the written consent of the copyright holder is prohibited. All rights reserved for patent.