




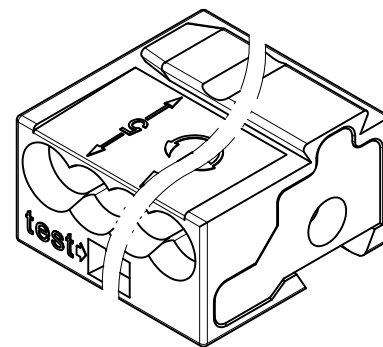
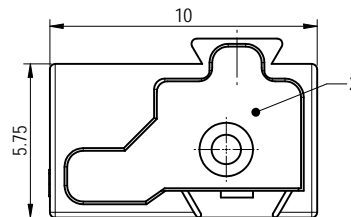


公差/General tolerances (mm)											D 0.1/10			
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2

02P


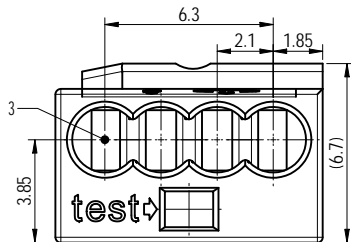


04P



ITEM	NAME OF PART	MATERIAL	NOTES
3	Current carrier	Copper alloy	Sn plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	150/7	/	150/7
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	250/6	320/6	630/6
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4	4
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm <sup>2</sup> )	22~18(Sol) / 0.2~0.75(Sol)(in all combinations), 1.0(Sol)(only 1)		
间距/Pitch(mm)/线数范围/Poles	2.1/N=02、04P		
剥线长度/Stripping length(mm)	5~6		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		



**DEGSON** MATERIAL: SURFACE/COLOR: MAT NO./REV: - / 00 MAT STATUS: 批量

APPD: 竺春华 2023.03.15 NAME: DG220B-2.1-XXP-1Y-00Z(H)

CHKD: 陈超 2023.03.15

DRAFT: 郑学龙 2023.03.14

DRAWING NO. 200025596 TYPE CUSTOMER DRAWING DRAWING STATUS 已发布 SCALE 5:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE
01			郑学龙	2023.03.14

Transfer or duplication of this document as well as the utilization of its contents without the written permission of DEGSON is prohibited. All rights reserved for patent.