

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文档的内容。侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1753 Rev.1.2

2

3



4

5

6



尺寸公差(mm)					0.05/10 ±1°
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	

额定电压电流/Rated Voltage/Current	125V/8A
绝缘电阻/Insulation resistance	≥100MΩ
插拔次数/Mechanical working life(mating cycles)	100
耐电压/Withstanding voltage	2000V AC
使用温度范围/Operating temperature(°C)	-40~+125
防水等级/Levels of protection	IP67
接线方式/Terminal	铆压
线径范围/Wire range(AWG/mm²)	18~24/0.8~0.2
剥线长度/Stripping length(mm)	4~5
符合RoHS环保要求/Conform to RoHS	Yes

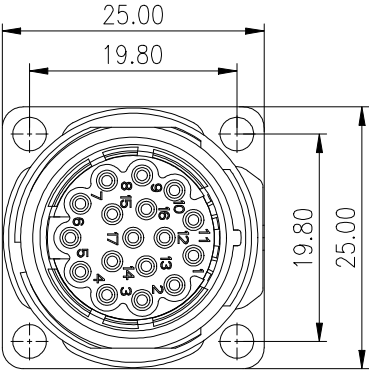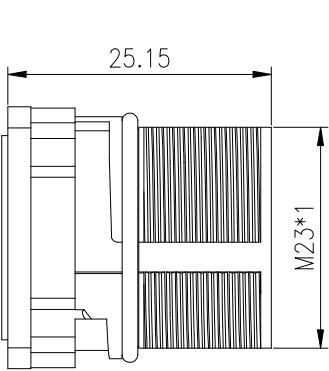

安装孔尺寸

法兰尺寸

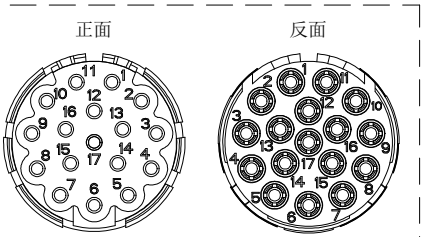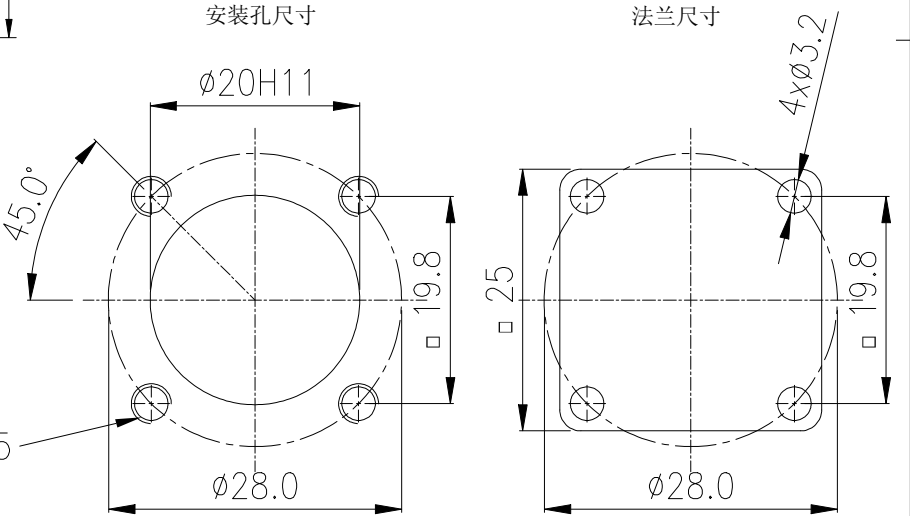

正面

反面

激光打标对照参考序位图

REV	ECN	DESCRIPTION	DRFT	DATE

MATERIAL: /		SURFACE: /	
MAT.NO.: 20050000016		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD:			
CHKD:			
Description:		SCSH-M23R-17P-MM-SS7000-00A(H)	
DRFT:Jiang MX 2021.01.04		DRAWING NO.: 200103324	
DRAFTING		REV	TO
SIZE: A4		TYPE: PRODUCT DRAWING	
SCALE: 1:1		SHEET 1/1	