

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利等知识产权外，其他权利均归本公司所有。未经许可，不得复制或传播。 02-10P

FOR-1755 Rev.1.6

2


3

4






5

6

比例 1: 1



5、6

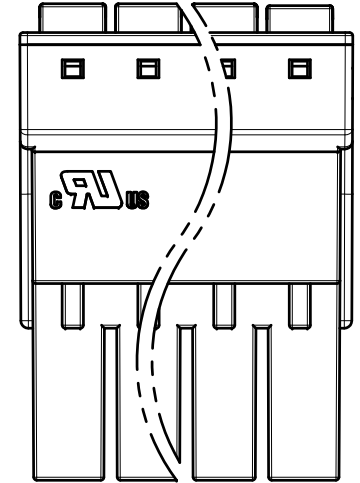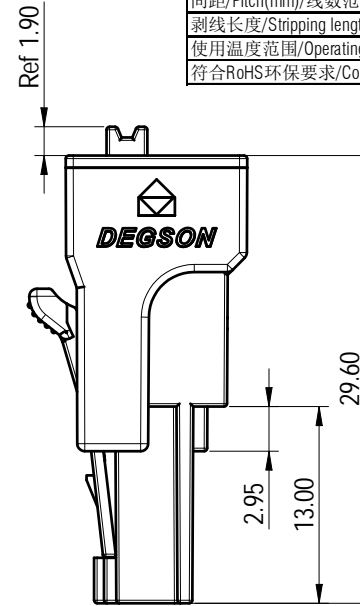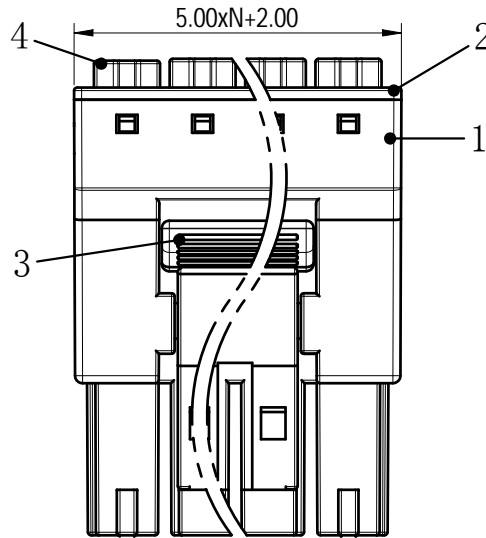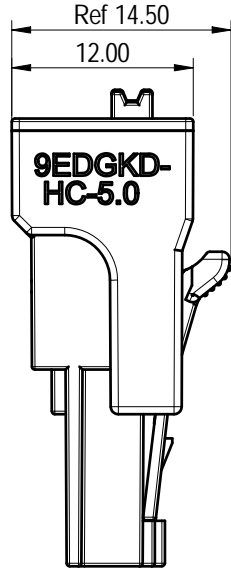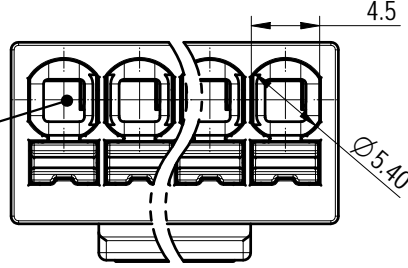

未注公差/General tolerances (mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

UL 标准/UL Standard:

额定电压/电流/Rated Voltage(V)/Current(A) B C D

UL 标准/UL Standard: F(III/3) / /

额定电压/电流/Rated Voltage(V)/Current(A) 500/20 / /

额定脉冲电压(KV)/Rate Impulse Voltage(KV) 4 / /

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等级/Pollution Degree III/3 / /

额定电压/电流/Rated Voltage(V)/Current(A) 500/20 / /

额定脉冲电压(KV)/Rate Impulse Voltage(KV) 4 / /

线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²) 20~12 / 0.5~2.5


间距/Pitch(mm)/线数范围/Poles 5.00/N=02-10P

剥线长度/Stripping length(mm) 10~11


使用温度范围/Operating temperature(°C) -40~+105

符合RoHS环保要求/Conform to RoHS Yes


04P



05P



比例 1: 1



ALL even-number Products use 02P Locker,
ALL odd-number Products use 03P Locker

00	/	产品线数修订为02-10P	曹利彬	2023.12.18
REV	ECN	DESCRIPTION	DRFT	DATE



MATERIAL: / SURFACE/COLOR: /

MAT NO./REV: / / 00 MAT STATUS: 小批量

NAME

9EDGKD-HC-5.0-XXP-1Y-00Z (H)

APPD:	蓝贵凡	2022.09.14	NAME	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
CHKD:	/	/	NAME	200109903	CUSTOMER DRAWING	已发行	2: 1	1/1
DRFT:	曹利彬	2022.09.14	DRAWING NO.	200109903	CUSTOMER DRAWING	已发行	2: 1	1/1