


未注公差/General tolerances(mm)


0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

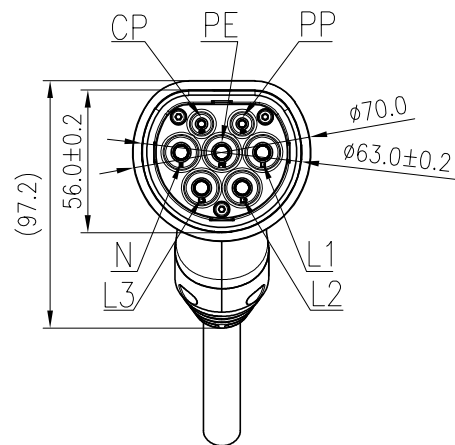



Wiring diagram

L1 6mm² Brown
L2 6mm² Black
L3 6mm² Gray
N 6mm² Blue
PE 6mm² Yellow/Green

PP
CP 0.75mm² Red

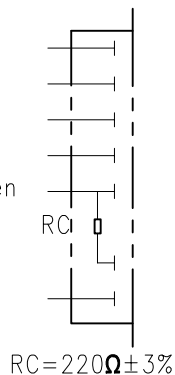

RC=220Ω±3%

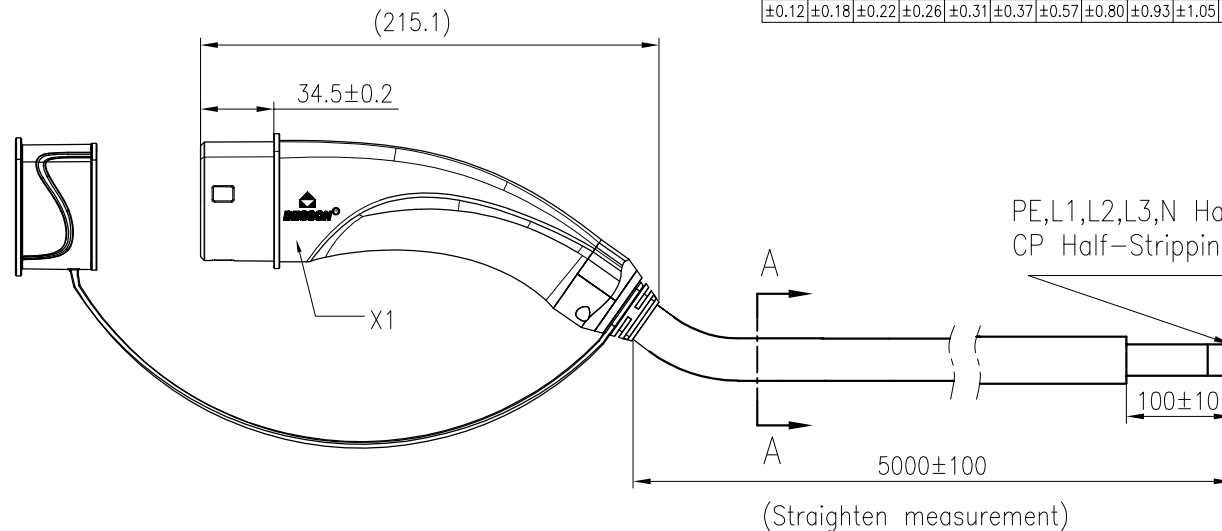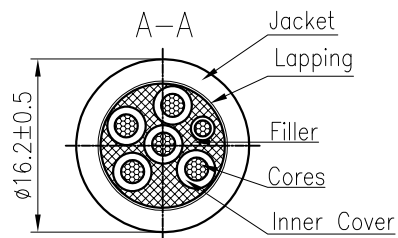

X1 Laser Printing Front Note:



Laser Printing Back Note(Arial):

MEAC-T-032A-V22-03-5.0M-10AH
32A 480V AC
IEC 62196-2:2022
IP67
20xxxxxx-xxxx

额定电压/Rated voltage/Current	480V AC/32A
绝缘电阻/Insulation resistance	>100MΩ, 500V DC 1min
耐压/Withstanding voltage	L, N and PE ,2500V AC 1min L and N ,2500V AC 1min
防护等级/Ingress protection	IP67
插拔寿命/Insertion/Pullout times	10,000 Times
插拔力/Insertion/Pullout force	<100N
使用温度范围/Operating temperature(°C)	-30~+50
线材规格/Cable specification	5*6mm ² + 1*0.75mm ² Black
标准/Reference standard	IEC 62196-2:2022
符合RoHS环保要求/Conform to RoHS	Yes



MATERIAL:
MAT NO./REV: D0-1

SURFACE/COLOR:
MAT STATUS:

APPD:
CHKD:

DRFT: Zhang H 2025.02.07

NAME MEAC-T-032A-V22-03-5.0M-10A(H)

DRAWING NO. TYPE

CUSTOMER DRAWING

DRAWING STATUS

SCALE 1:3

SHEET 1/1

REV ECN

DESCRIPTION

DRFT

DATE

mm (inch)