



公差/General tolerances(mm)	
0	>3
~	~
3	6
~	10
~	18
~	30
~	50
~	80
~	120
~	180
~	250
~	315
~	400
~	500
~	>500
±Z	±Z

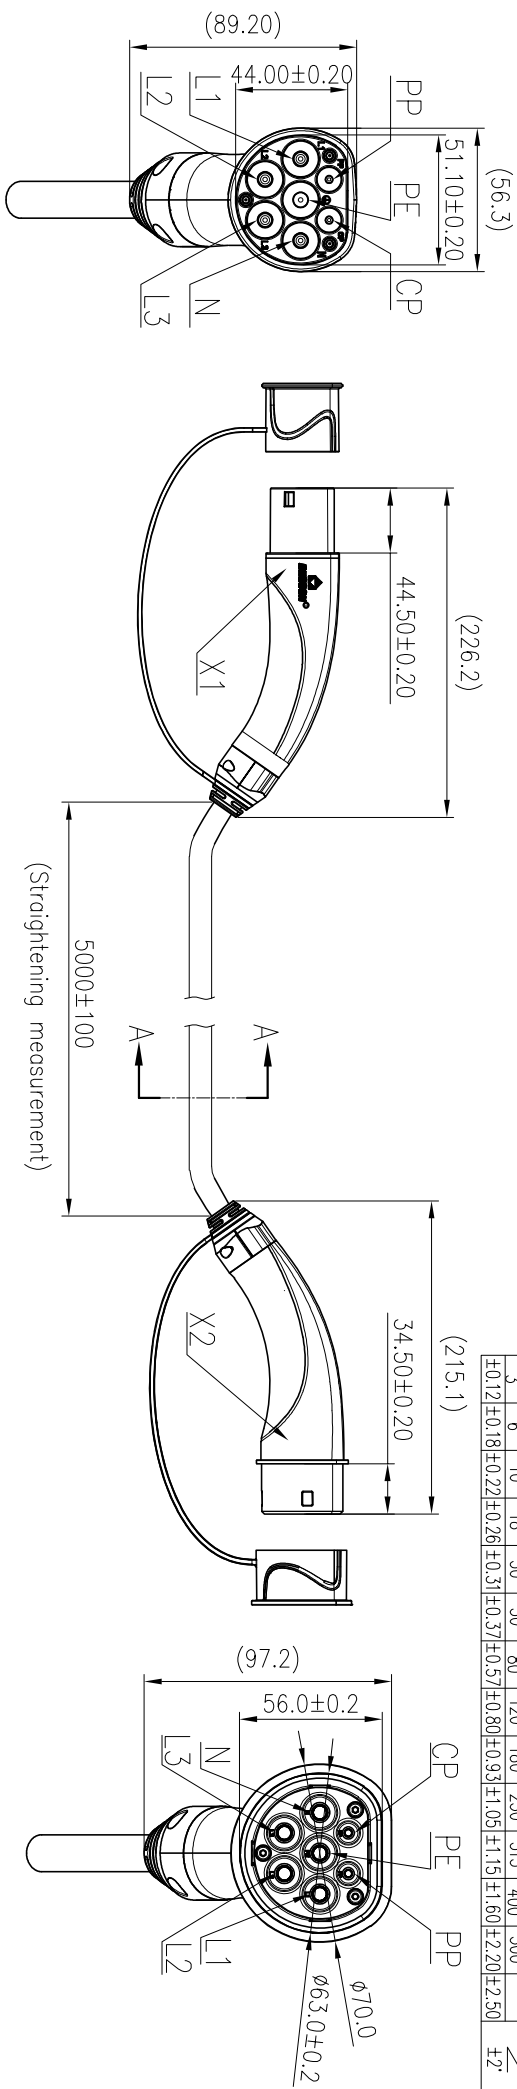


Wiring diagram  
POWER SUPPLY  
ELECTRIC VEHICLE

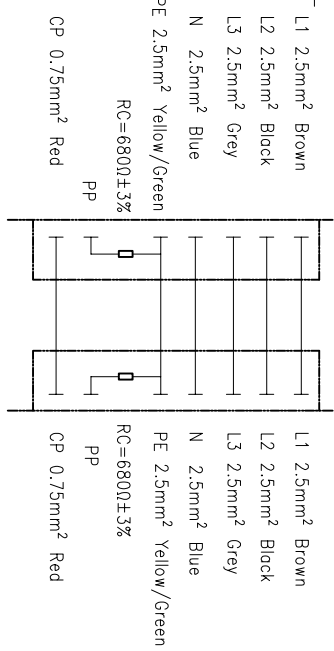

X1 Laser Printing Front Note:  
**DEGSON**  
Laser Printing Book Note(Arind):  
MEAC-T-020A-P22-03-5.0M-20AH  
20A 480V AC  
IEC 62196-2:2022  
PB7  
20xxxxxx-xxxx

X2 Laser Printing Front Note:  
**DEGSON**  
Laser Printing Front Note:  
MEAC-T-020A-V22-03-5.0M-20AH  
20A 480V AC  
IEC 62196-2:2022  
PB7  
20xxxxxx-xxxx

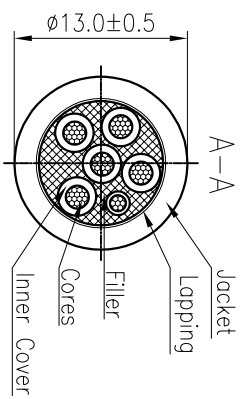

额定电压/Rated Voltage/Current	480V AC/20A
绝缘电阻/Insulate Resistance	>100MΩ,500V DC 1min
耐压/Withstanding Voltage	L, N and PE .2500V AC 1min L and N .2500V AC 1min
防护等级/Ingress Protection	IP67
插接寿命/Insertion/Pullout Times	10,000 Times
插接力/Insertion/Pullout Force	<100N
使用温度范围/Operating temperature(°C)	-30~+50
线材规格/Cable specification	5*2.5mm²+1*0.75mm² Black
标准/Reference standard	IEC 62196-2:2022
符合RoHS环保要求/Conform to RoHS	Yes

<b>DEGSON</b>		MATERIAL:	SURFACE/COLOR:
APPD:		MAT NO./REV:	/ D0-1 MAT STATUS:
CHKD:			
DRAFT:	Rong QX 2024.12.17	NAME:	MEAC-T-020A-V22P22-03-5.0M-10A(H)
DRAWING NO.:	A4	TYPE:	CUSTOMER DRAWING
DRAFT:		DRAWING STATUS:	SCALE
			1:3
		SHEET	1/1