



尺寸公差/General tolerances(mm)																0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	>630	>800	±2'
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±2'
3	6	10	18	30	50	80	120	180	250	315	400	500	630	800	1000	±2'
±0.12/±0.18/±0.22/±0.26/±0.31/±0.37/±0.57/±0.80/±0.93/±1.05/±1.15/±1.60/±2.20/±2.50																±2'

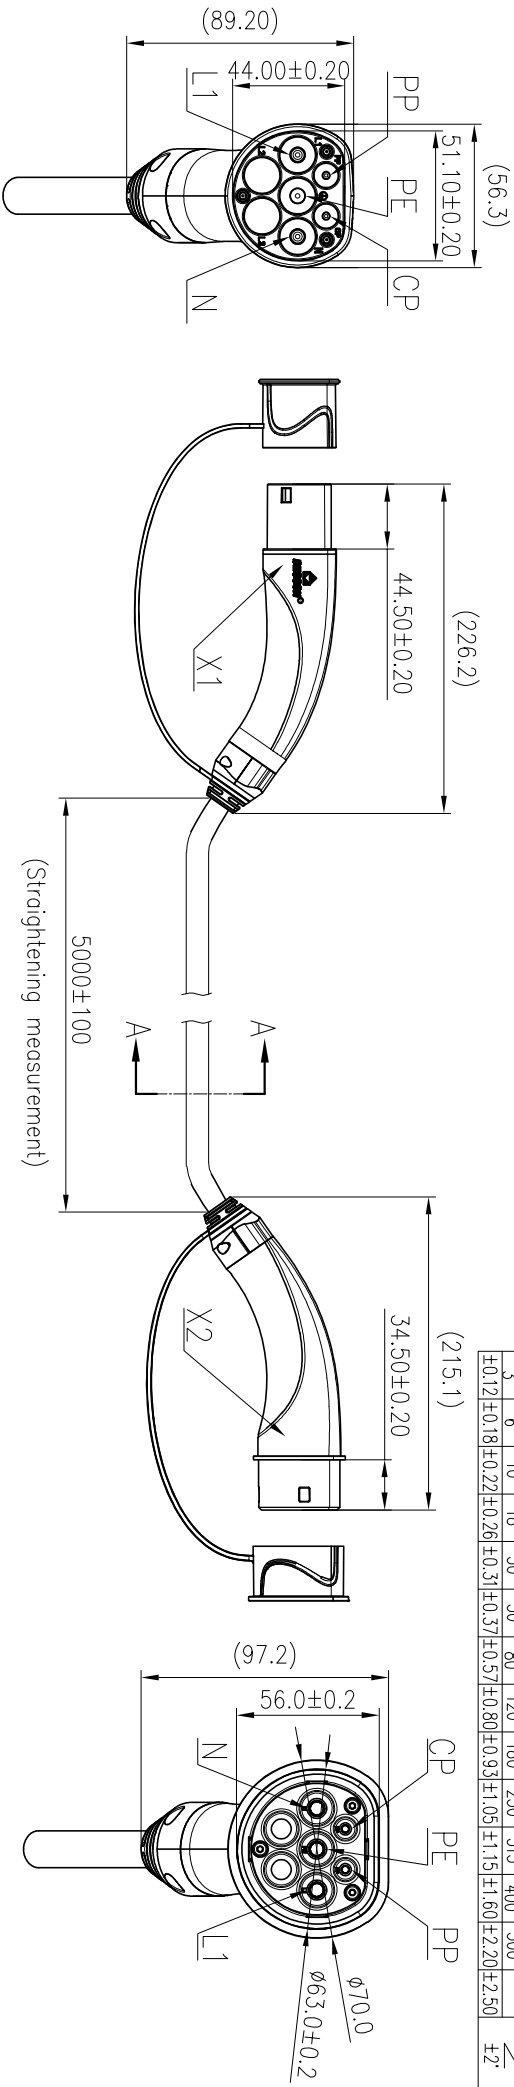

Wiring diagram

ELECTRIC VEHICLE

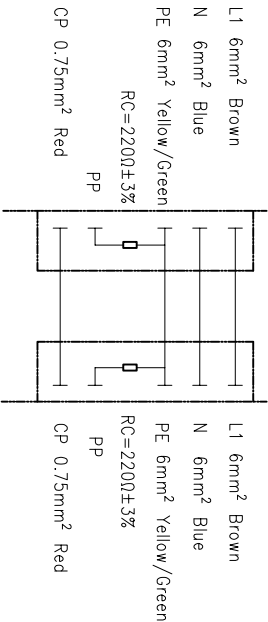


Laser Printing Front Note:




Laser Printing Back Note(Arriol):
MEAC-S-032A-P22-03-5.0M-20AH
32A 250V AC
IEC 62196-2:2022
IP67
20xxxxxx-xxxx

Laser Printing Front Note(Arriol):



MEAC-S-032A-V22-03-5.0M-20AH
32A 250V AC
IEC 62196-2:2022
IP67
20xxxxxx-xxxx

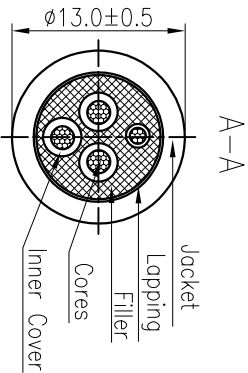

额定电压/Rated Voltage/Current	250V AC/32A
绝缘电阻/Insulate Resistance	>100MΩ,500V DC 1min
耐压/Withstanding Voltage	1.5 N and PE .2500V AC 1min
防护等级/Ingress Protection	IP67
使用寿命/Insertion/Pullout Times	10,000 Times
插拔力/Insertion/Pullout Force	<100N
使用温度范围/Operating temperature(°C)	-30~+50
线材规格/Cable specification	3*6mm²+1*0.75mm² Black
标准/Reference standard	IEC 62196-2:2022
符合RoHS环保要求/Conform to RoHS	Yes



MATERIAL:	SURFACE/COLOR:
MAT NO./REV:	MAT STATUS:
/ D0-1	

REV	ECN	DESCRIPTION	DRAFT	DATE	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
1	2	3	4	5	6	CUSTOMER DRAWING		1:3	1/1