

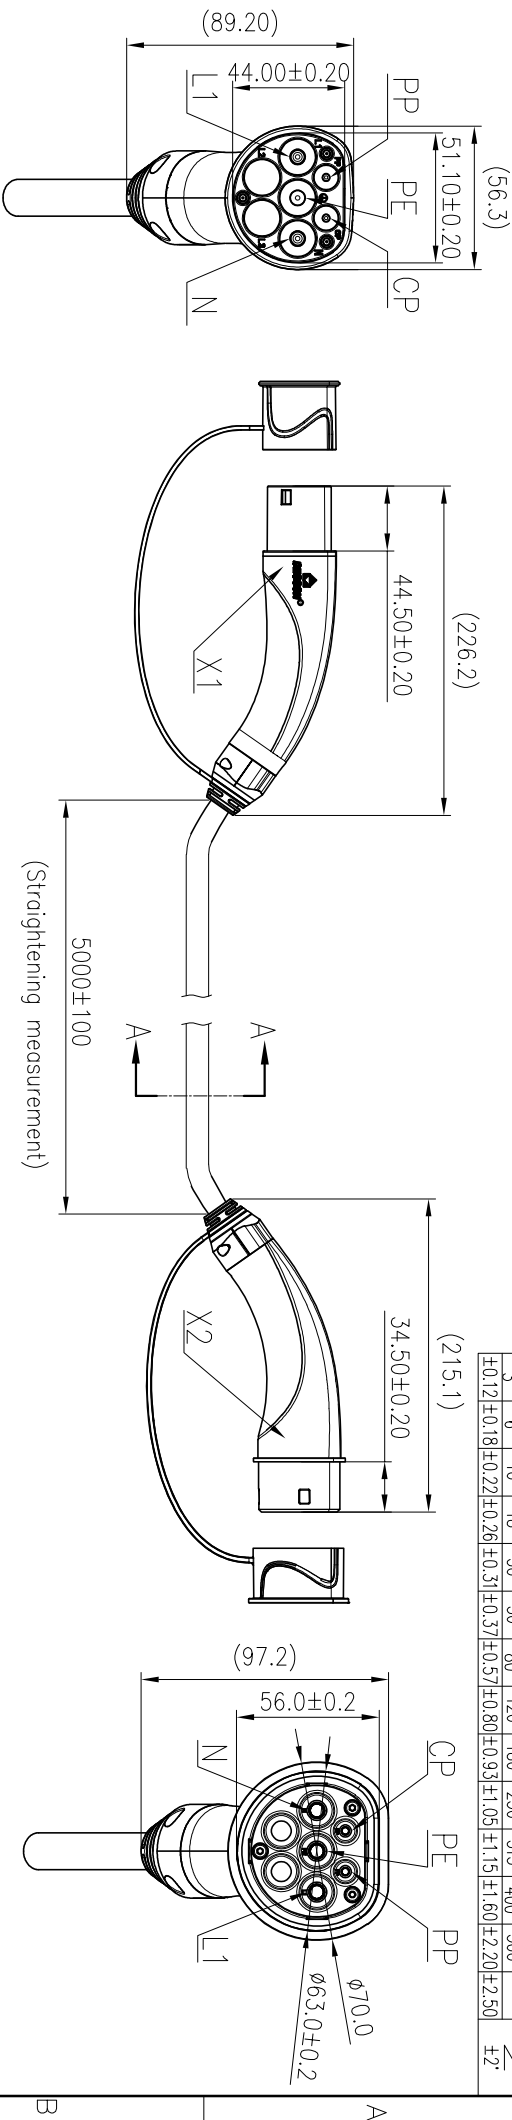


公差/General tolerances(mm)	
0	>3
~	>6
~	>10
~	>18
~	>30
~	>50
~	>80
~	>120
~	>180
~	>250
~	>315
~	>400
~	>500
~	>500
±2'	±2.50

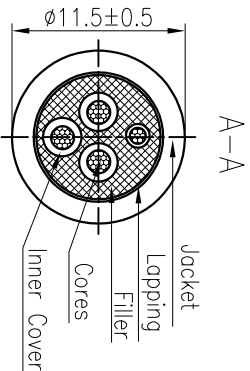

Wiring diagram
ELECTRIC VEHICLE

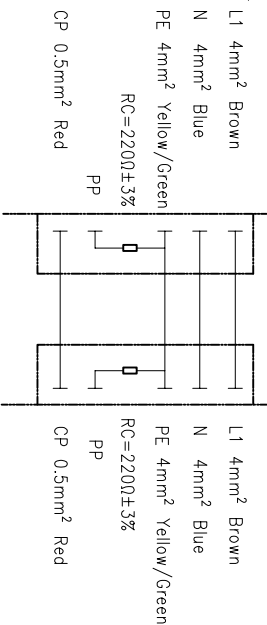

X1 Laser Printing Front Note:
 Laser Printing Book Note(Arind):
 MEAC-S-032A-V21-03-5.0M-10AH
 32A 250V AC
 IEC 62196-2:2022
 IP67
 20xxxxxx-xxxx

X2 Laser Printing Front Note:
 Laser Printing Book Note(Arind):
 MEAC-S-032A-V21-03-5.0M-10AH
 32A 250V AC
 IEC 62196-2:2022
 IP67
 20xxxxxx-xxxx

额定电压/Rated Voltage/Current	250V AC/32A
绝缘电阻/Insulate Resistance	>100MΩ,500V DC 1min
耐压/Withstanding Voltage	L, N and PE .2500V AC 1min L and N .2500V AC 1min
防护等级/Ingress Protection	IP67
使用寿命/Insertion/Pullout Times	10,000 Times
插拔力/Insertion/Pullout Force	<100N
使用温度范围/Operating temperature(°C)	-30~+50
线材规格/Cable specification	3*4mm²+1*0.5mm² Black
标准/Reference standard	IEC 62196-2:2022
符合RoHS环保要求/Conform to RoHS	Yes

	MATERIAL:	SURFACE/COLOR:
APPD:	MAT NO./REV:	/ D0-1 MAT STATUS:
CHKD:		

NAME	MEAC-S-032A-V21P21-03-5.0M-10A(H)
DRAWING NO.	TYPE CUSTOMER DRAWING
DRAFT: Rong QX 2024.12.17	DRAWING STATUS
DRFT: A4	SCALE
	1:3
	SHEET
	1/1