


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent.
utility model or designs registrations. 除非经书面特许，禁止复制或传播本文件的内容，否则将承担赔偿责任。本公司保留对该文件的所有权利，特别是关于申请发明、实用新型或外观设计专利的所有权。

未注公差/General tolerances(mm)													
0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50


0.1/10 ±2°

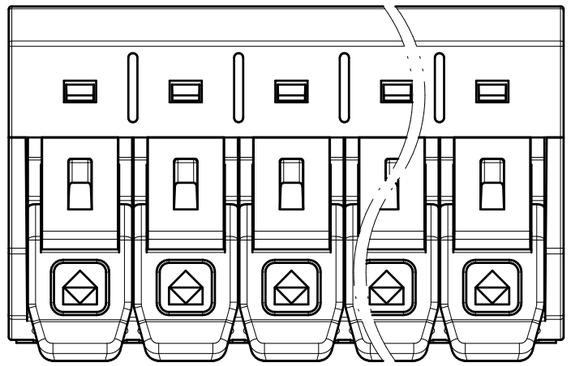


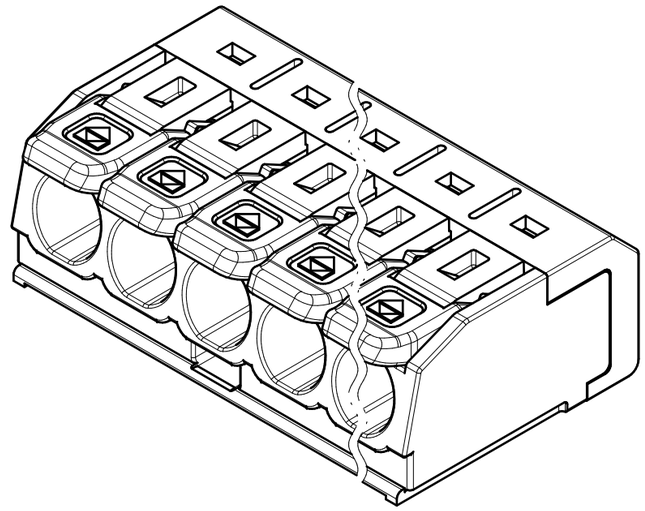


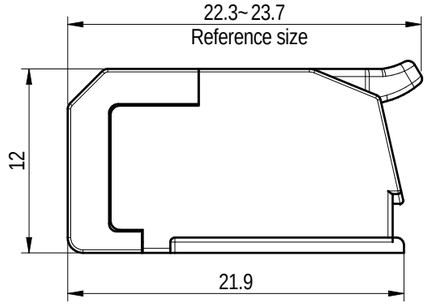


THe test hole at 02P is on the right

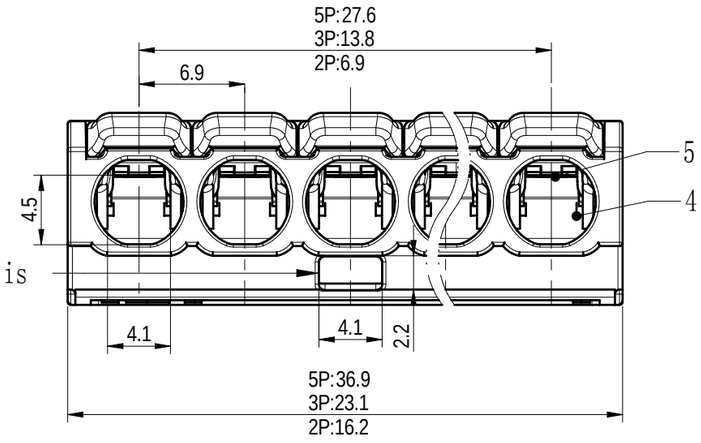

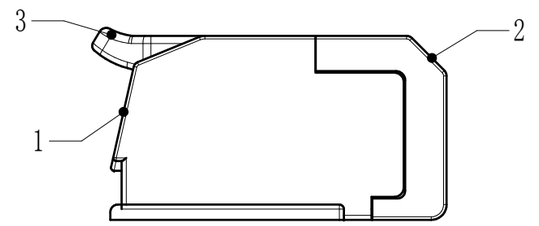

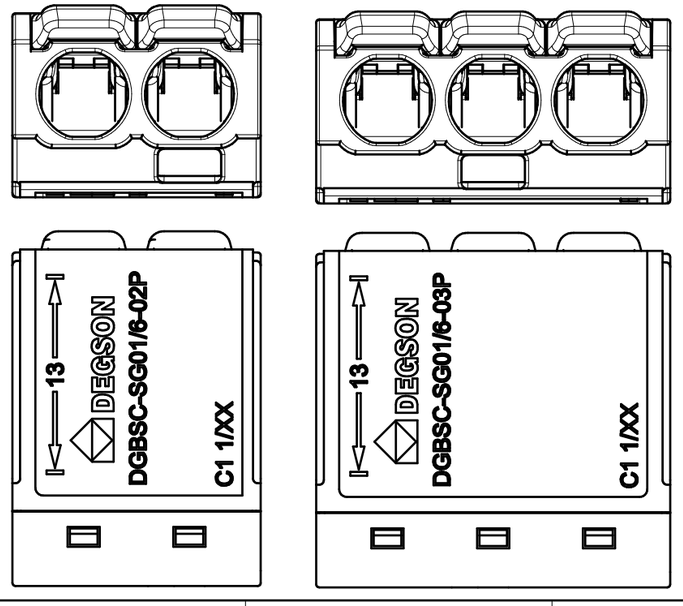

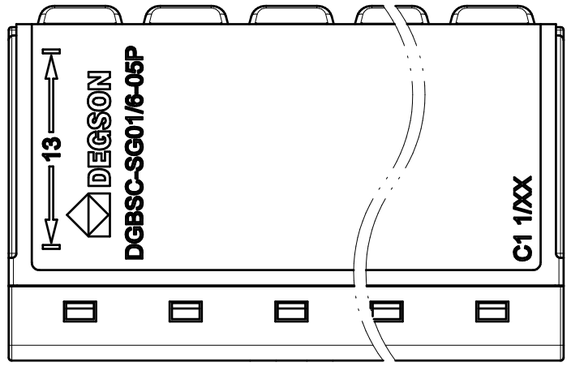

ITEM	NAME OF PART	MATERIAL	NOTES
5	Current carrier	Copper	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66+GF	UL94V-0
2	Cover	PC	UL94V-2
1	Housing	PC	UL94V-2

	B	C	D
UL 标准/UL Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)	/	600/30	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	450/41
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	4
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	20～10 / 0.5～6		
冷压头不带绝缘套管/with ferrule without plastic sleeve	20～12 / 0.5～4		
冷压头带绝缘套管/with ferrule, with plastic sleeve	20～12 / 0.5～4		
间距/Pitch(mm)/线数范围/Poles	6.9/N=2P、3P、5P		
剥线长度/Stripping length(mm)	13～14		
使用温度范围/Operating temperature(℃)	-40～+105(IEC)		
符合RoHS环保要求/Conform to RoHS	Yes		

REV	ECN	DESCRIPTION	DRFT	DATE
01			朱伟明	2026.05.09

DEGSON

APPD:	裘耀志	2026.05.09
CHKD:	朱伟明	2026.05.09
DRFT:	朱伟明	2026.05.09

A3 (inch)

MATERIAL: | SURFACE/COLOR:
MAT NO./REV: / 00 | MAT STATUS: 小批量

NAME: DGBSC-SG01/6-XXP(1Y-00ZH)

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200328683	CUSTOMER DRAWING	已发布	2.5:1	1/1