

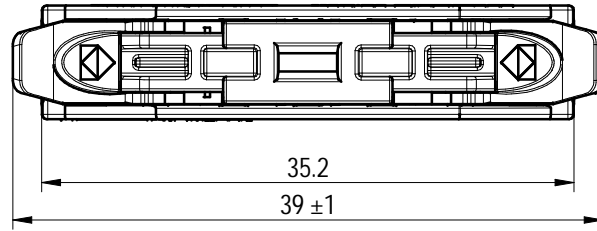

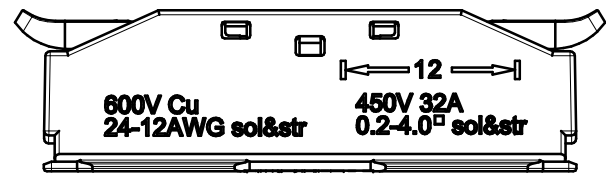



Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by Degson. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商标权等知识产权外，本公司保留所有权利。

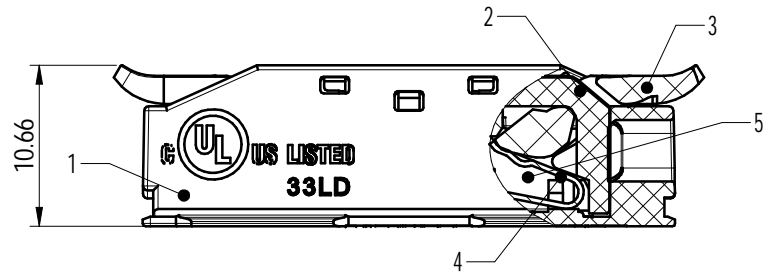

未注公差/General tolerances(mm)													0.1/10 ±2'
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

UL 标准/UL Standard:	
额定电压/电流/Rated Voltage(V)/Current(A)	600
IEC 标准/IEC Standard:	
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2
额定电压/电流/Rated Voltage(V)/Current(A)	450/32
工频耐压/Withstanding voltage(V/1Min)	AC2500
线数范围/Poles	N=01P
线径范围(硬线和软线)/Wire Range(rigid and	24~12/0.2~4.0
线数范围/Poles	N=01P
剥线长度/Stripping length(mm)	12~13
使用温度范围/Operating temperature(°C)	-40~+85(IEC)



SCAL 1:1

ITEM	NAME OF PART	MATERIAL	NOTES
5	Current carrier	Copper	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66+GF	UL94V-0
2	Cover	PC	UL94V-2
1	Housing	PC	UL94V-2

		MATERIAL: /		SURFACE/COLOR: /		
		MAT NO./REV: - / 00		MAT STATUS: 批量		
APPD: 蓝贵凡	2023.06.10	NAME				
CHKD: 曹利彬	2023.06.10	DGBSC-SG02/4-01P (17-200ZH)				
DRFT: 曹利彬	2023.06.10	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
		200199127	CUSTOMER DRAWING	Work	1:1	1/1

图纸版本	ECN	变更描述	设计人	设计日期
REV	ECN	DESCRIPTION	DRFT	DATE