

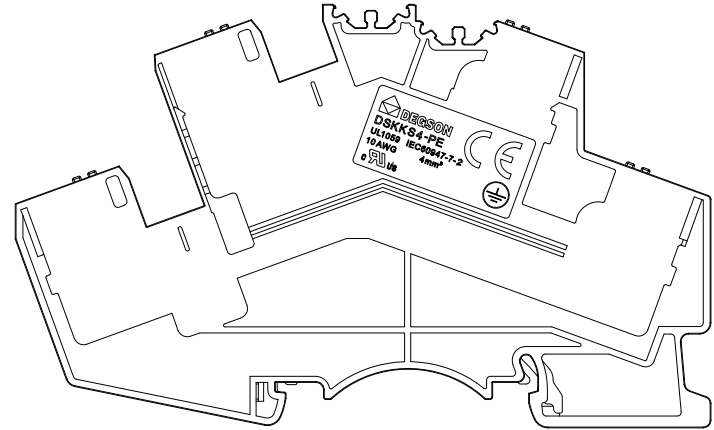



未注公差/General tolerances (mm)												0.1/10 ±2'		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400		>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

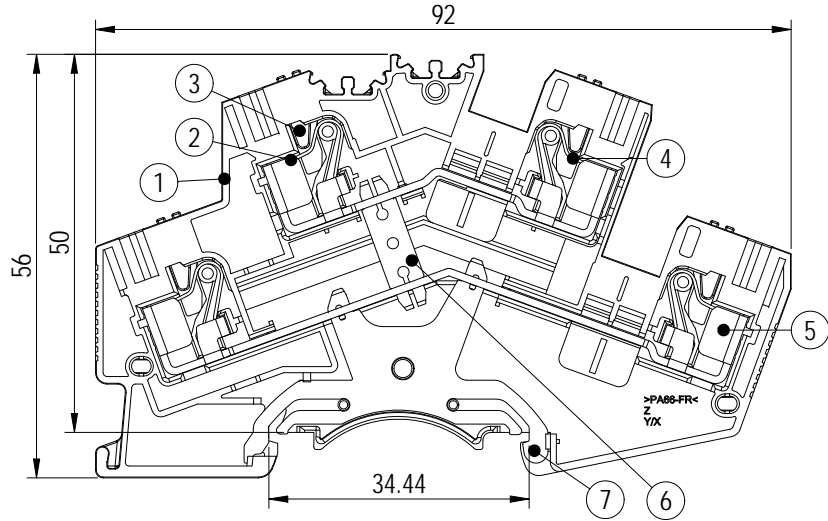

Please refer to the 3D model, for those unmarked dimensions

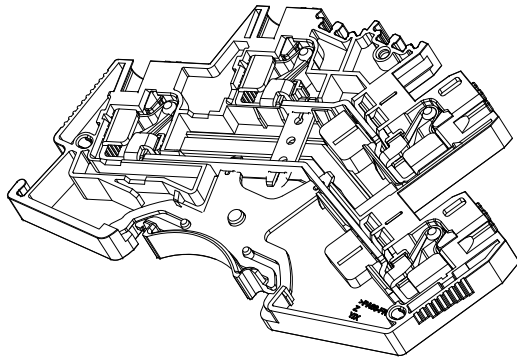

ITEM	NAME OF PART	MATERIAL	NOTES
7	PE	Copper alloy	Sn Plated
6	Bridge_piece	Copper alloy	Sn Plated
5	Current_carrier-2	Copper	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66+GF%	UL94V-0
2	Current_carrier-1	Copper	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Over voltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	24-10 / 0.2-4&6(SOL)		
间距/Pitch(mm)/线数范围/Poles	6.2/N=01P		
剥线长度/Stripping length(mm)	7-8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		



MATERIAL:	SURFACE/COLOR:
MAT NO./REV:	MAT STATUS: 批量

APPD: Li GL	2024.07.08
CHKD: Ma EK	2024.07.08
DRFT: Zong MZ	2024.07.08

NAME		DRAWING NO.		TYPE		DRAWING STATUS		SCALE		SHEET	
DSKKS4-PE-01P-1C-00Z (H)		200073688		CUSTOMER		work		2:1		1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
00	ECN	NEW DRAWING	Zong MZ	2024.07.08

DRFT: Zong MZ	2024.07.08
---------------	------------

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200073688	CUSTOMER	work	2:1	1/1

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、商标、注册、其他知识产权外，本公司保留所有权利。