


Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing. All rights reserved for patent. 除专利申明授权外，未经许可，不得复制或传播本文件内容。本公司保留对涉及发明、实用新型及外观设计专利权的权利。

FOR-1755 Rev. 1.8





7	Grounding	Copper alloy	Sn Plated
6	Current carrier 3	Copper	Sn Plated
5	Current carrier 2	Copper	Sn Plated
4	Current carrier 1	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

未注公差/General tolerances (mm)													0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

A
2:1

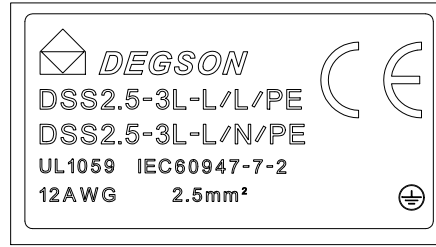

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Over voltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
最大负载电流/Maximum load current	/		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	26-12 / 0.2-2.5&4(SOL)		
间距/Pitch(mm)/线数范围/Poles	5.2/01P		
剥线长度/Stripping length(mm)	10-12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE	/		

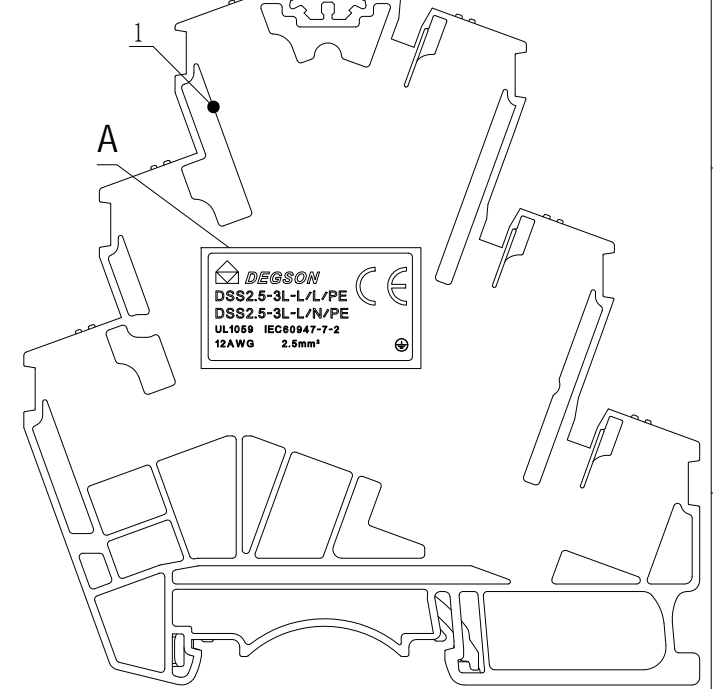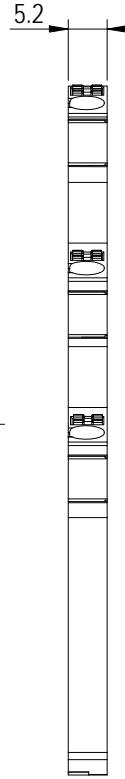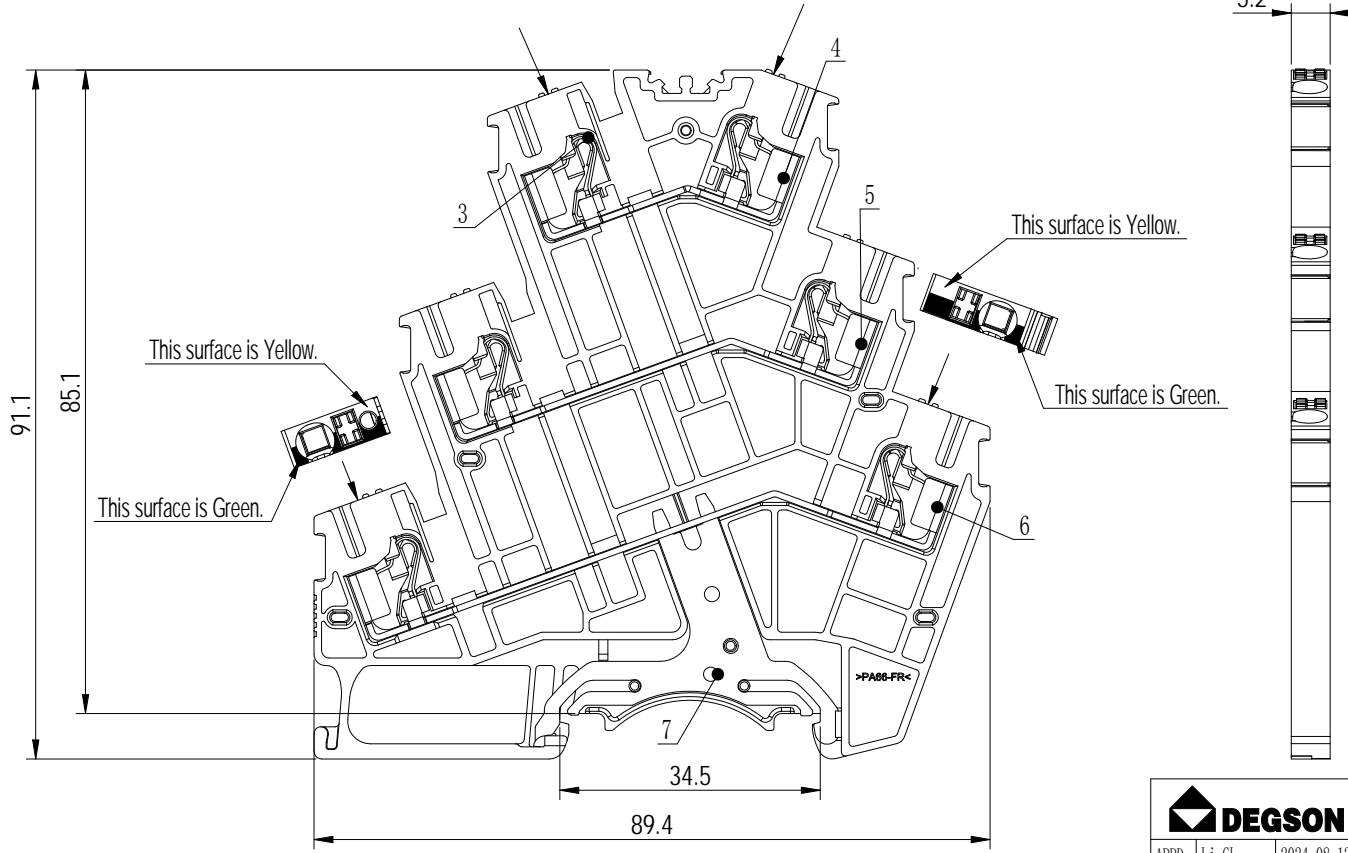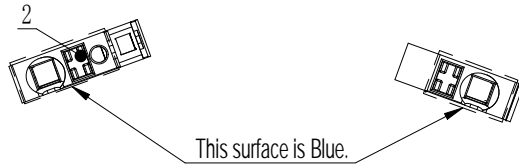

DEGSON			MATERIAL:	SURFACE/COLOR:	
APPD:	Li GL	2024.08.12	MAT NO./REV:	/	MAT STATUS: 批量
CHKD:	Ma EK	2024.08.08	NAME		
DRFT:	Zheng QG	2024.08.08	DSS2.5-3L-L/N/PE-01P-1Y-01Z(H)		
REV	ECN	DESCRIPTION	DRAWING NO.	TYPE	DRAWING STATUS
00		The first release	200177019	CUSTOMER DRAWING	已发布
		Zheng QG	A4	SCALE	SHEET
		2024.08.08	(inch)	1:1	1/1

00		The first release	Zheng QG	2024.08.08
REV	ECN	DESCRIPTION	DRFT	DATE

1 2 3 4 5 6