


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by DEGSON. All rights reserved for patent. 除专利号外，所有其他权利均保留。 未经授权，禁止复制或传播本文件内容。 未经授权，禁止使用、复制或传播本文件内容。 未经授权，禁止在本文件外进行任何复制或传播。 未经授权，禁止在本文件外进行任何复制或传播。

FOR-1755 Rev. 1.8

7	Grounding	Copper alloy	Sn Plated
6	Current carrier 3	Copper	Sn Plated
5	Current carrier 2	Copper	Sn Plated
4	Current carrier 1	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10 ±2'
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	




A
2:1

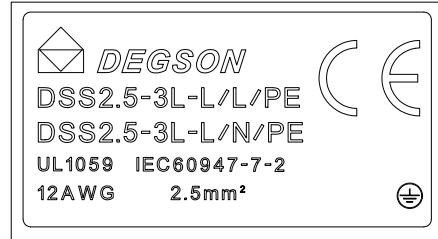

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Over voltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
最大负载电流/Maximum load current	/		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	26-12 / 0.2-2.5&4(SOL)		
间距/Pitch(mm)/线数范围/Poles	5.2/01P		
剥线长度/Stripping length(mm)	10-12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE	/		



2

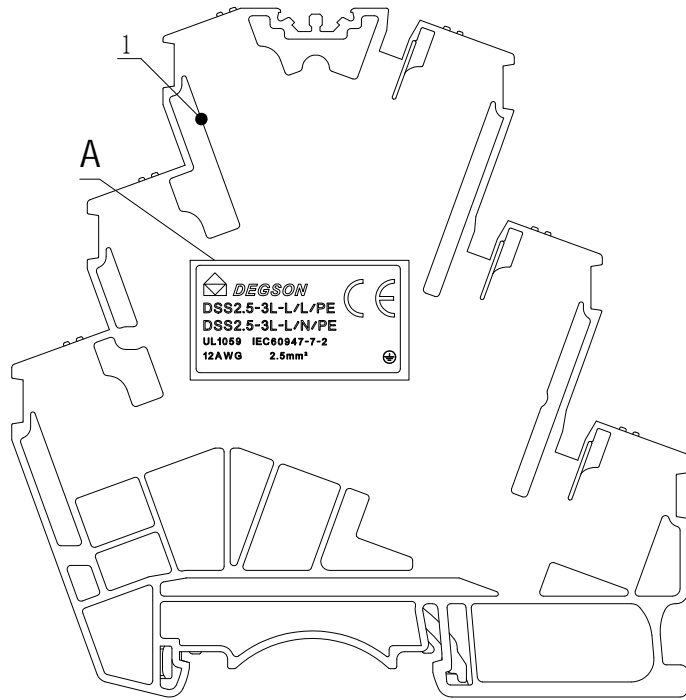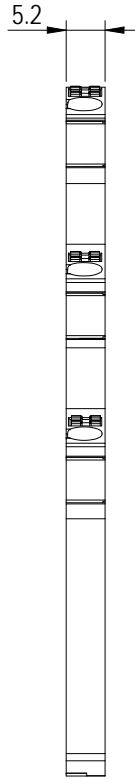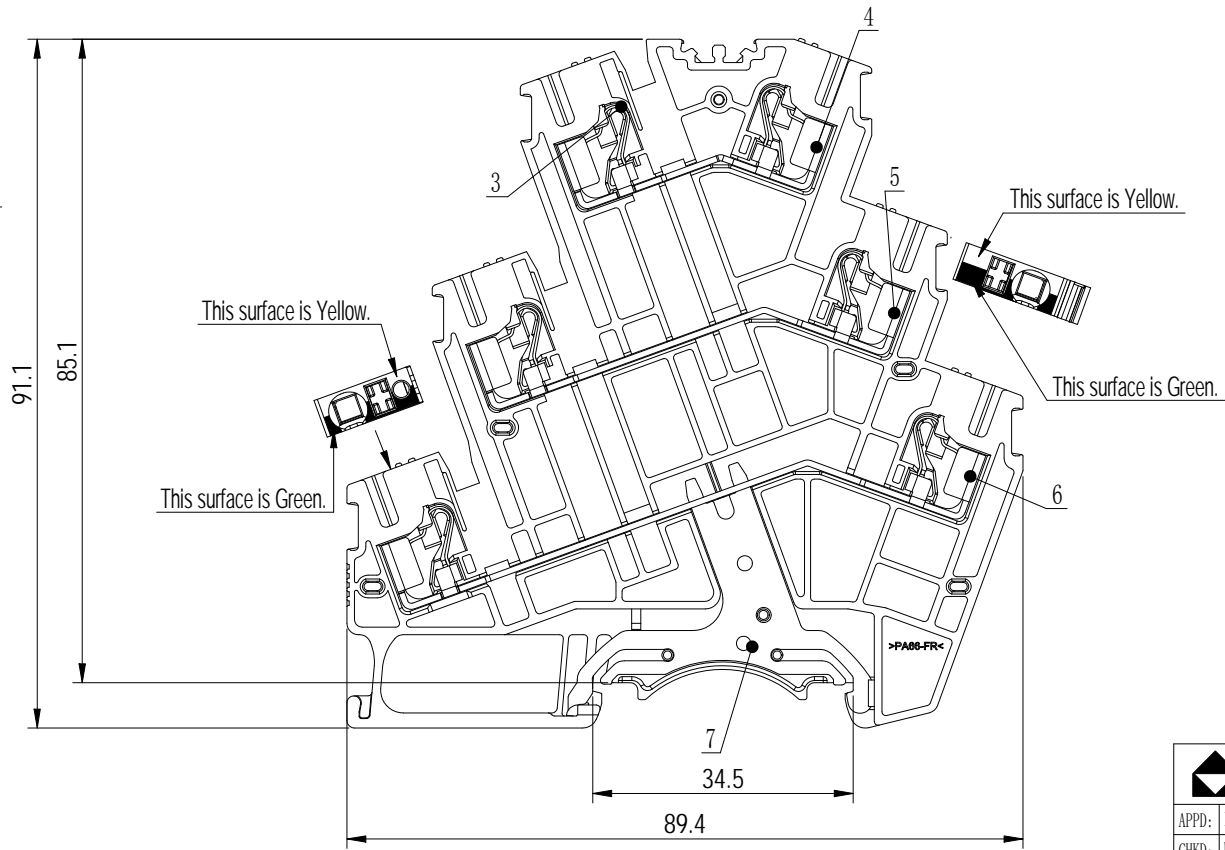

			MATERIAL:	SURFACE/COLOR:		
			MAT NO./REV:	MAT STATUS: 批量		
APPD:	Li GL	2024.08.12	NAME			
CHKD:	Ma EK	2024.08.08	DSS2.5-3L-L/L/PE-01P-1Y-01Z(H)			
DRFT:	Zheng QG	2024.08.08	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
			200177017	CUSTOMER DRAWING	已发布	1:1
					SHEET	1/1

00		The first release	Zheng QG	2024.08.08
REV	ECN	DESCRIPTION	DRFT	DATE

1 2 3 4 5 6