
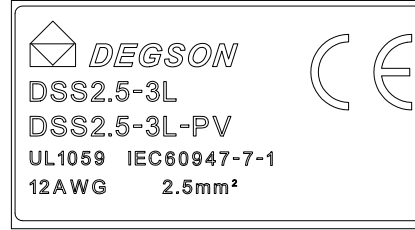
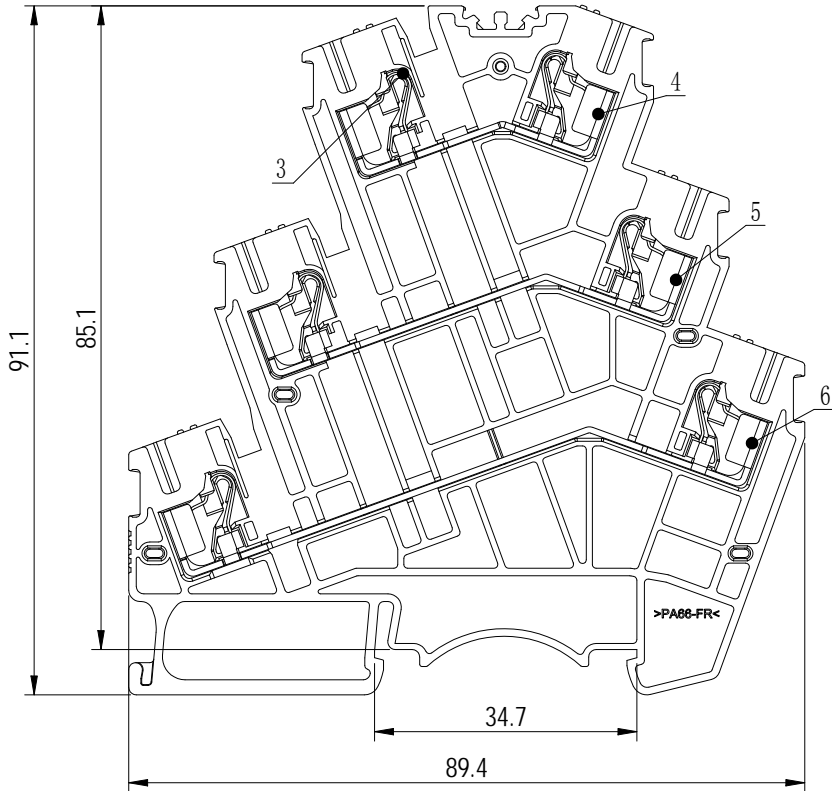


Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密和外观设计专利的所有权外，其他权利均归本公司所有。

FOR-1755 Rev. 1.8



6	Current carrier 3	Copper	Sn Plated
5	Current carrier 2	Copper	Sn Plated
4	Current carrier 1	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

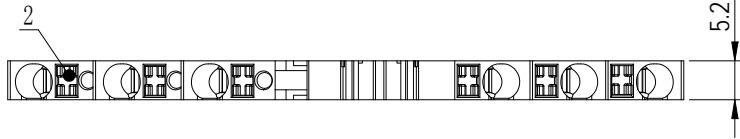

A
2:1

未注公差/General tolerances (mm)												0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400
~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

UL 标准/UL Standard	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/20	600/20	/
IEC 标准/IEC Standard			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	800/20	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
最大负载电流/Maximum load current	25A(具有4mm²导线横截面, 刚性/with 4mm² conductor cross section, rigid)		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	26- 12/ 0.2- 2.5&4(SCL)		
间距/Pitch(mm)/线数范围/Poles	5.2/01P		
剥线长度/Stripping length(mm)	10- 12		
使用温度范围/Operating temperature(°C)	-40- + 105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE/	/		

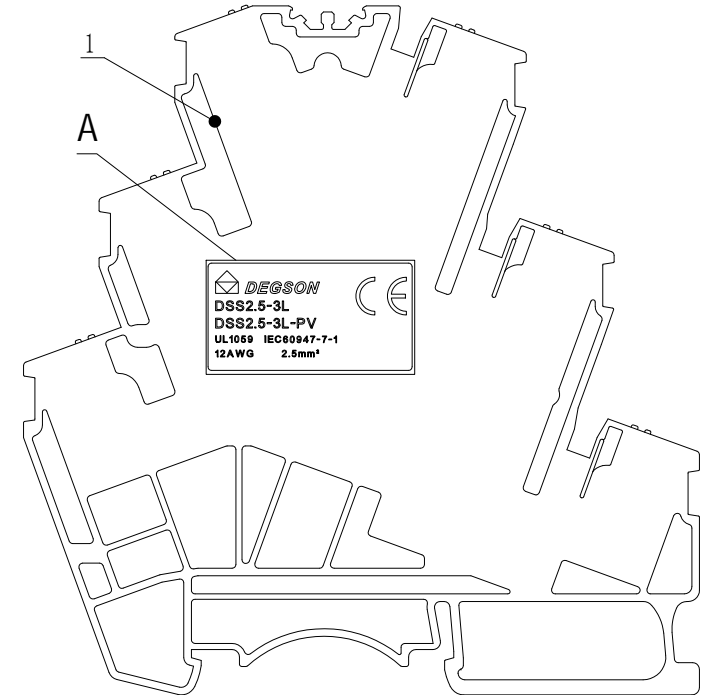

			MATERIAL:	SURFACE/COLOR:		
			MAT NO./REV:	MAT STATUS: 批量		
APPD: Li GL	2024.08.12	NAME				
CHKD: Ma EK	2024.08.08	DSS2.5-3L-01P-1Y-01Z(H)				
DRFT: Zheng QG	2024.08.08	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
		200176963	CUSTOMER DRAWING	已发布	1:1	1/1

00		The first release	Zheng QG	2024.08.08
REV	ECN	DESCRIPTION	DRFT	DATE

1 2 3 4 5 6