
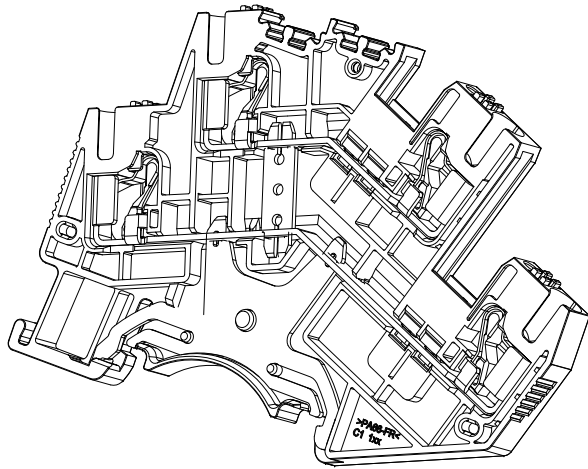


未注公差/General tolerances (mm)												0.1/10 ±2'	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

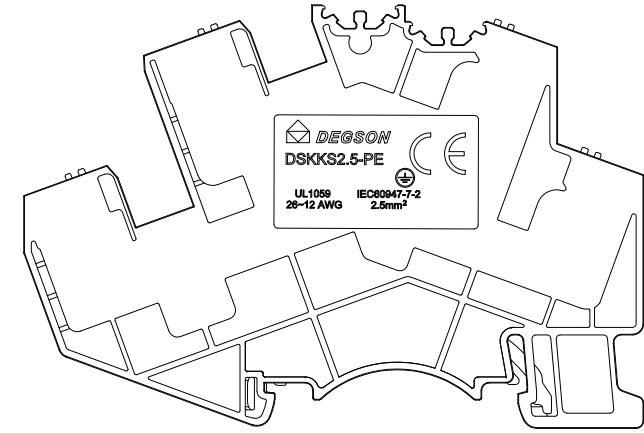

7	Bridge_piece	Copper alloy	Sn Plated
6	Button	PA66+GF%	UL94V-0
5	Spring	Stainless steel	/
4	Current_carrier2	Copper	Sn Plated
3	PE	Copper alloy	Sn Plated
2	Current_carrier1	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/ UL Standard:	B	C	D
额定电压/ 电流/ Rated Voltage(V)/ Current(A)	/	/	/
IEC 标准/ IEC Standard:	III/ 3	III/ 2	IV/ 2
过压类别/ Overvoltage Category/ 污染等级/ Pollution Degree	/	/	/
额定电压/ 电流/ Rated Voltage(V)/ Current(A)	6	/	/
额定脉冲电压(KV)/ Rate Impulse Voltage(KV)	26~12/ 0.2~2.5&4 (SQL)		
线径范围(硬线和软线)/ Wire Range(rigid and flexible)(AVG mm²)	5.2/ N=01P		
间距/ Pitch(mm)/ 线数范围/ Poles	10~12		
剥线长度/ Stripping length(mm)	- 40~+ 105		
使用温度范围/ Operating temperature(°C)	Yes		
符合 RoHS 环保要求/ Conform to RoHS			

		MATERIAL:	SURFACE/COLOR:		
MAT NO./REV:		/	MAT STATUS: 批量		
APPD: Li GL	2022.11.15	NAME			
CHKD: Ma EK	2022.11.11	DSKKS2.5-PE-01P-1C-00Z(H)			
DRFT: Liu CB	2022.11.10	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
A4		200062278	CUSTOMER DRAWING	已发布	1:1
(inch)				SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00		NEW DRAWING	Liu CB	2022.11.10

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless expressly authorized in writing by DEGSON. All rights reserved for patent. 除专利等明确标注外，其他内容均受版权保护。未经授权，禁止复制或传播。如有侵权，请联系 DEGSON 法务部。 010-60400000