
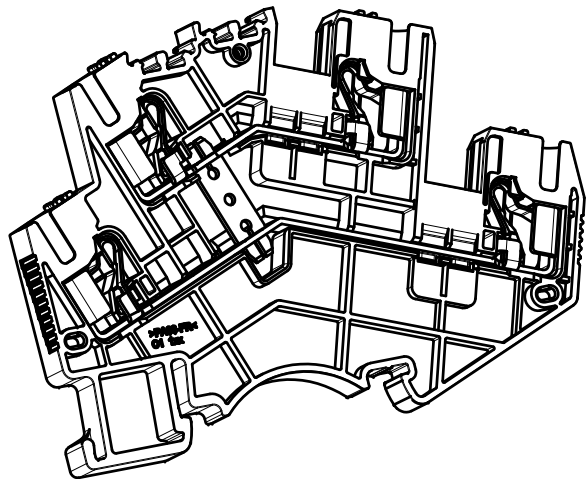
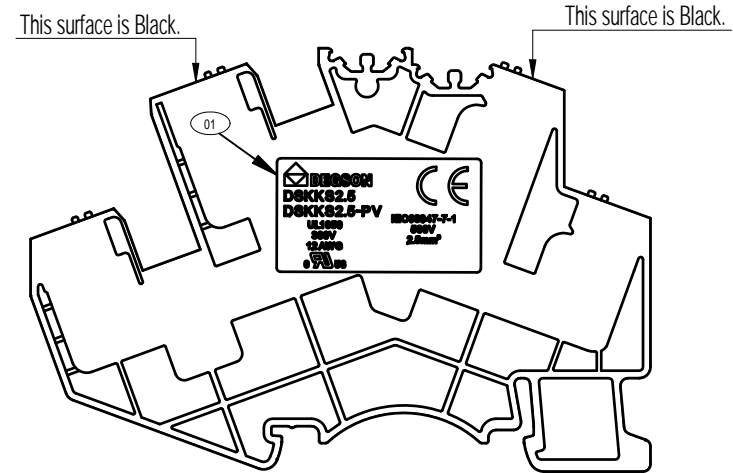



未注公差/General tolerances (mm)												0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400
3	6	10	18	30	50	80	120	180	250	315	400	500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

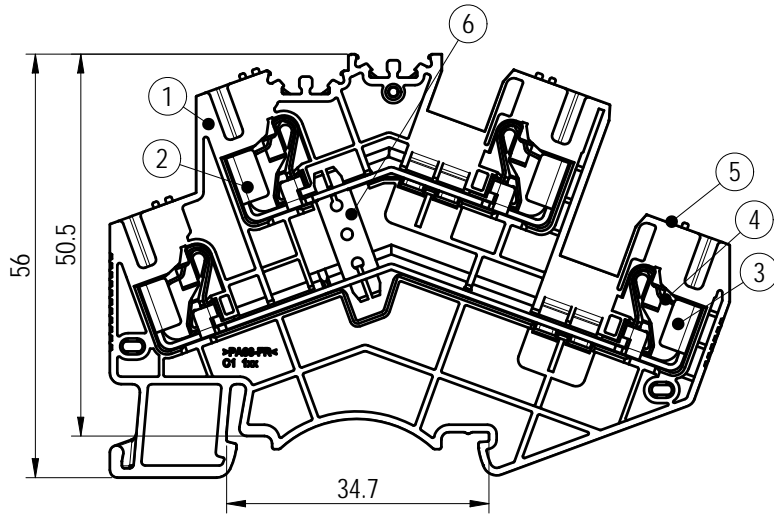

ITEM	NAME OF PART	MATERIAL	NOTES
6	Bridge_piece	Copper alloy	Sn Plated
5	Button	PA66+GF%	UL94V-0
4	Spring	Stainless steel	/
3	Current_carrier2	Copper	Sn Plated
2	Current_carrier1	Copper	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300V/20	300/20	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	500/24	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	26~12/0.2~2.5&4 (SOL)		
间距/Pitch(mm)/线数范围/Poles	5.2(N)=01P		
剥线长度/Stripping length(mm)	10~12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求/Conform to RoHS	Yes		

DEGSON		MATERIAL:	SURFACE/COLOR:		
APPD: Li GL	2024.06.24	MAT NO./REV:	MAT STATUS: 批量		
CHKD: Ma EK	2024.06.24	NAME			
DRFT: Zong MZ	2024.06.24	DSKKS2.5-PV-01P-1Y-00Z(H)			
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET	
200062271	CUSTOMER DRAWING	已发布	1:1	1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
01		Authentication lettering update	Zong MZ	2024.06.24

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing by DEGSON. All rights reserved for patent. 未经授权，禁止复制或传播本文件内容。保留所有权利，未经许可，不得复制或传播本文件内容。 除专利外，所有权利保留。 未经授权，禁止复制或传播本文件内容。 保留所有权利，未经许可，不得复制或传播本文件内容。