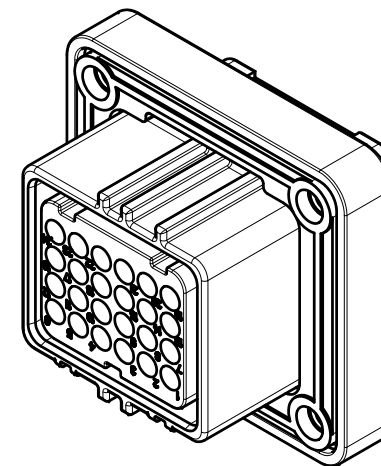


技术参数/Technical Characteristics	
额定电压/Rated Voltage	300V DC
额定电流/Rated Current	5A
绝缘电阻/Insulation resistance	$\geq 200M\Omega$
插拔次数/Mechanical working life(mating cycles)	≥ 100
使用温度范围/Operating temperature($^{\circ}C$)	$-40^{\circ}\sim 105^{\circ}$
耐电压/Withstanding voltage	2.5KV
接线方式/Terminal	Crimp
防护等级/Ingress protection	IP67 (Mated)
线径范围/Wire range(AWG/mm ²)	22 $\sim$ 18/0.3 $\sim$ 0.8
线缆直径/Cable diameter(mm)	1.3 $\sim$ 2.0
环保要求/Conform	Yes

 DEGSON		MATERIAL:		SURFACE/COLOR:				
		MAT NO./REV: 28040000741-1 / 00		MAT STATUS: 小批量				
APPD:			NAME ETS-05A-P24-C-GY-03					
CHKD:								
DRFT:								
  A4 			DRAWING NO. 200368429		TYPE	DRAWING STATUS work	SCALE 1.2:1	SHEET 1/1