
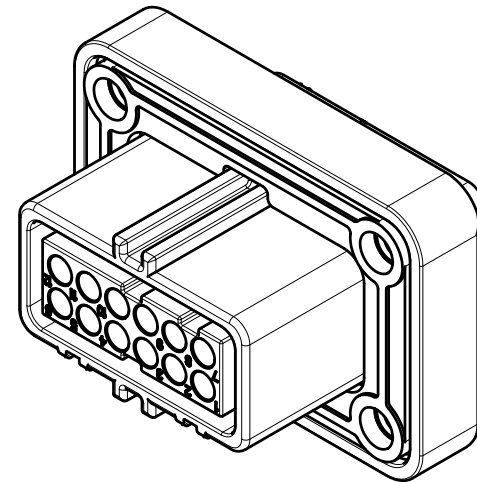
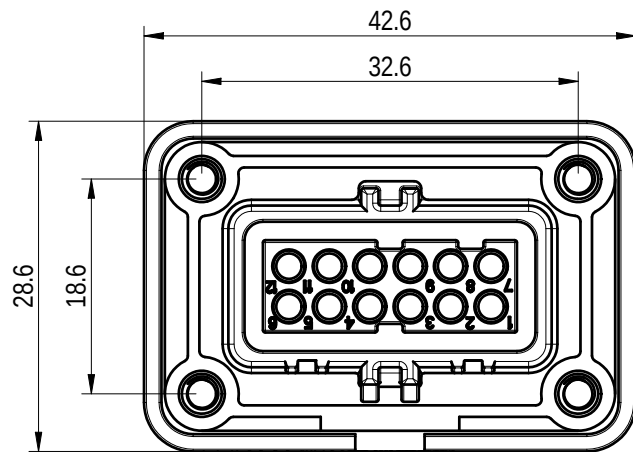
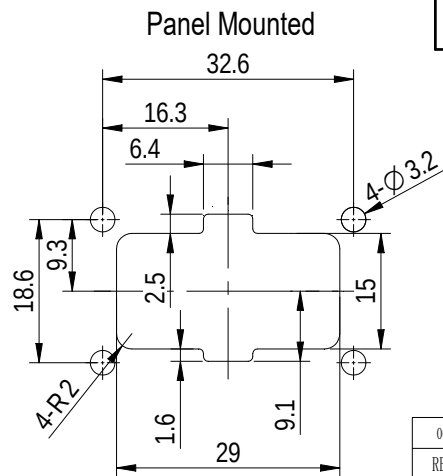
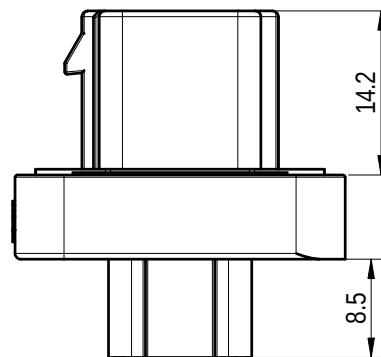


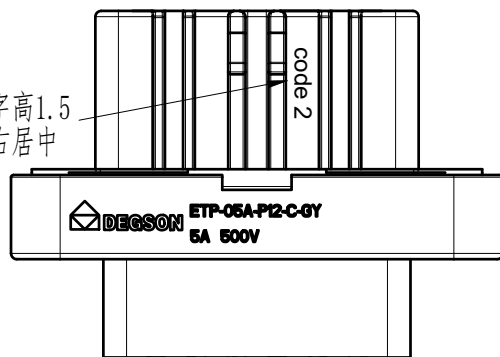

激光打标

Arial字体, 字高1.5
打标位置左右居中

技术参数/Technical Characteristics

额定电压/Rated Voltage	300V DC
额定电流/Rated Current	5A
绝缘电阻/Insulation resistance	≥200MΩ
插拔次数/Mechanical working life(mating cycles)	≥100
使用温度范围/Operating temperature(° C)	-40~105
耐电压/Withstanding voltage	2.5KV
接线方式/Terminal	Crimp
防护等级/Ingress protection	IP67(Mated)
线径范围/Wire range(AWG/mm²)	22~18/0.3~0.8
线缆直径/Cable diameter(mm)	1.3~2.0
环保要求/Conform	Yes



MATERIAL:

SURFACE/COLOR:

MAT NO./REV: 28040000739-1 / 00

MAT STATUS: 小批量

APPD:

NAME

CHKD:

ETS-05A-P12-C-GY-04

DRFT:

DRAWING NO.

TYPE

DRAWING STATUS

SCALE

SHEET

200368426

work

1.5:1

1/1

00	REV	ECN	DESCRIPTION	DRFT	DATE

