

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除经给予明确授权外, 复制或传播此文件, 或在本文件内容的基础上进行设计、复制、引用、交流等行为均属于侵权行为, 本公司保留追究法律责任。 侵权者将承担赔偿责任。

FOR-1755 Rev. 2.2



2

3



4

5


6

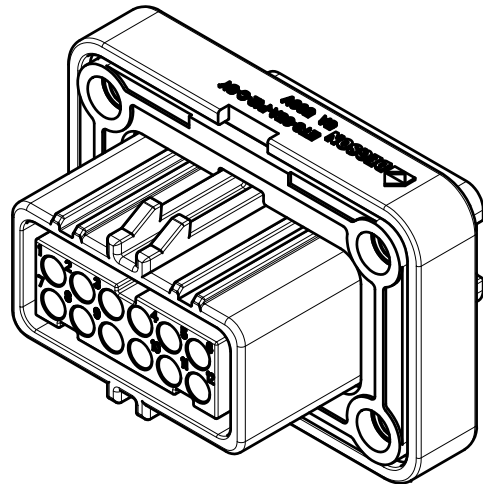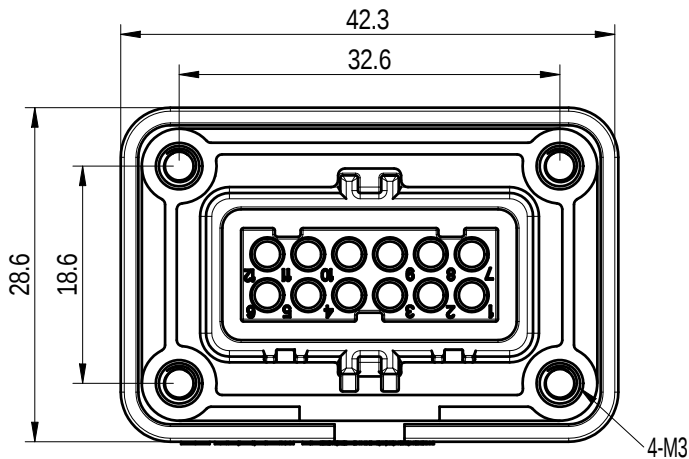

激光打标
Arial字体, 字高1.5
打标位置左右居中

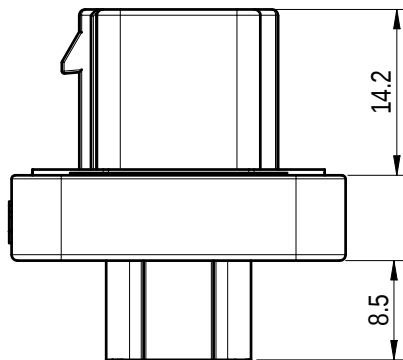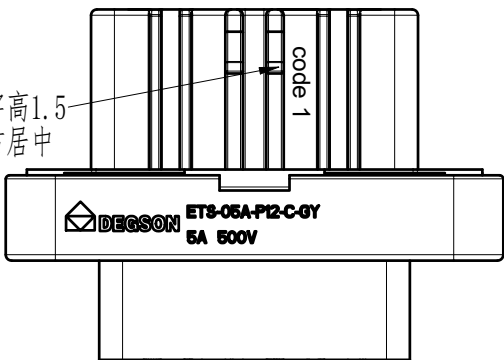

Panel Mounted

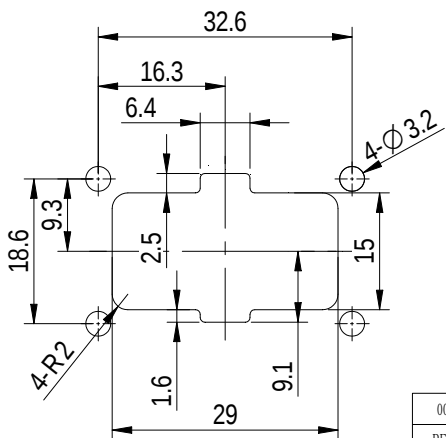

技术参数/Technical Characteristics	
额定电压/Rated Voltage	300V DC
额定电流/Rated Current	5A
绝缘电阻/Insulation resistance	≥200MΩ
插拔次数/Mechanical working life(mating cycles)	≥100
使用温度范围/Operating temperature(° C)	-40~105
耐电压/Withstanding voltage	2.5KV
接线方式/Terminal	Crimp
防护等级/Ingress protection	IP67 (Mated)
线径范围/Wire range (AWG/mm²)	22~18/0.3~0.8
线缆直径/Cable diameter (mm)	1.3~2.0
环保要求/Conform	Yes

			MATERIAL:		SURFACE/COLOR:				
			MAT NO./REV: 28040000740-1 / 00		MAT STATUS: 小批量				
APPD:			NAME ETS-05A-P12-C-GY-03						
CHKD:									
DRFT:			DRAWING NO. 200368417		TYPE		DRAWING STATUS work	SCALE 1.5:1	SHEET 1/1
									

00					
REV	ECN	DESCRIPTION	DRFT	DATE	

1

2

3

4

5

6