Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非经予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将为赔偿责任。本公司保留对涉及实用新型和外观专利的所有权利。

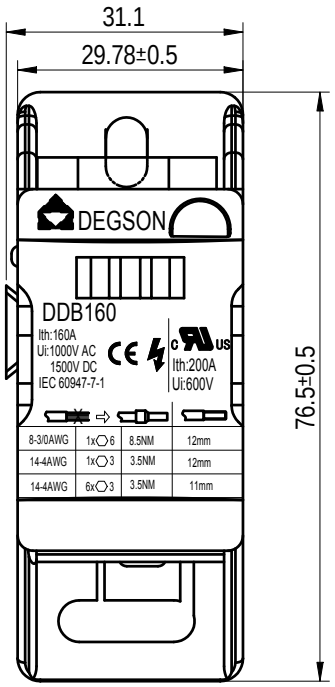

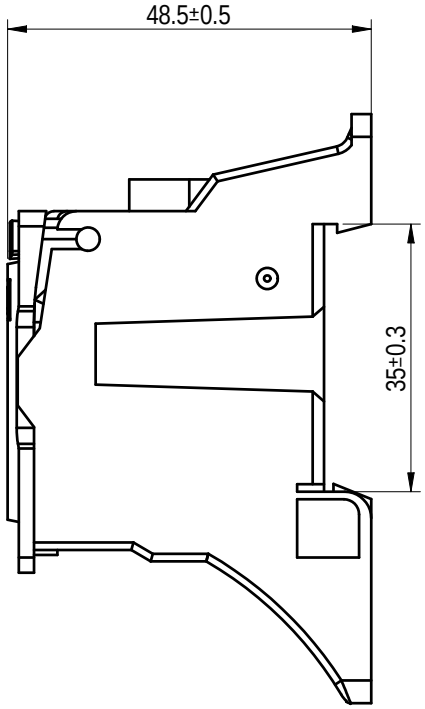

注：执行标准:IEC60947-1 / UL1059

1、额定电压：AC/DC 1000V(IEC) / 600V(UL)
2、额定电流：160A(IEC) / 200A(UL)
3、耐电压：AC 1分钟内3000V无击穿
4、阻燃性能：灼热丝960°C，阻燃（V-0)
5、导线截面：进线：10-70mm² （8-3/0 AWG） ≤8.5Nm
出线：6x2.5-16mm²（14-4 AWG） ≤3.5Nm
桥接线：1x6-16mm² （14-4 AWG） ≤3.5Nm
6、安装方式：TS35导轨式或者螺钉式
7、产品材质及颜色：底座:PA 灰白色
上盖:PA 黑色
标记块：PA 棕、黑、蓝、灰、绿、黄、红色可选
导电件：黄铜（镀锡）
螺丝：钢（镀锌）
8、工作环境温度（°C）：-40~+85°C
9、组合方式：可多单元拼接
10、符合ROHS2.0
11、单位：毫米（mm）
12、认证：CE UL

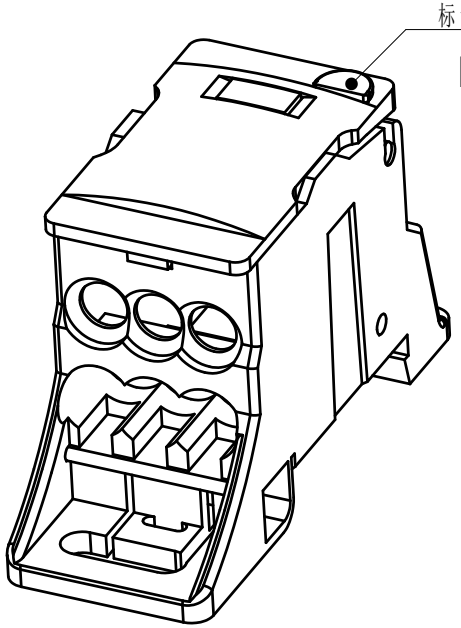

DDB160-01P-11-XXZ(H)
XX：00 标记块是黑色的

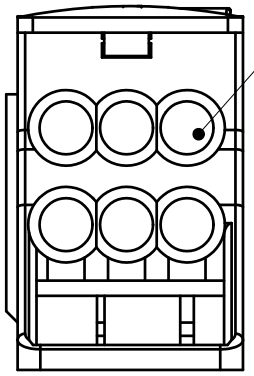

00		New Product	黄仁锦	2026.01.27
REV	ECN	DESCRIPTION	DRFT	DATE

APPD:	彭敏	2026.01.27
CHKD:	高卫国	2026.01.27
DRFT:	黄仁锦	2026.01.27

A4 mm (inch)

DEGSON

MATERIAL:	SURFACE/COLOR:
MAT NO./REV: 11110000035-1 / 00	MAT STATUS: 小批量
NAME: DDB160-01P-11-00Z(H)	

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200401762	CUSTOMER DRAWING	已发布	2:1	1/1