

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密和与著作权有关的权利外，其他权利均归本公司所有。未经许可，不得复制或传播。

FOR-1755 Rev.2.2

2

3

4

5

6

未注公差/General tolerances (mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2"
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	




UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	150/8	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	2.5	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	/		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	26~16 / 0.14~1.5		
线数范围/Poles	N=36P		
剥线长度/Stripping length(mm)	8~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

Assembly diagram

DF760(400)-G-1-03-00Z(H)	
电源夹片额定电压电流/Rated Voltage/Current	24V/10A
信号夹片额定电压电流/Rated Voltage/Current	5V/5A
使用温度范围/Operating temperature(°C)	-40~+155
符合RoHS环保要求/Conform to RoHS	Yes
回流焊承受温度/Reflow temperature(°C)	265

7	Grounding	Copper alloy	Sn Plated
6	DF760(400)-G-1-03-00Z(H)	/	/
5	DF760-300-18P-C1-00Z(H)	/	/
4	Card rail foot	PA66	UL94V-0
3	Housing-L	PC	UL94V-0
2	Housing-MM	PC	UL94V-0
1	Housing-R	PC	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:	SURFACE/COLOR:	
MAT NO./REV: 30060001003-1 / 00		MAT STATUS: 样品		
NAME		DF760-450-1-C1-00Z(H)		
APPD: 李根芳	2025.08.08	DRAWING NO.	TYPE	DRAWING STATUS
CHKD: 马恩升	2025.08.08	200378744	CUSTOMER DRAWING	work
DRFT: 蒋其	2025.08.08	SCALE	1:1	SHEET
REV	ECN	DESCRIPTION	DATE	1/1

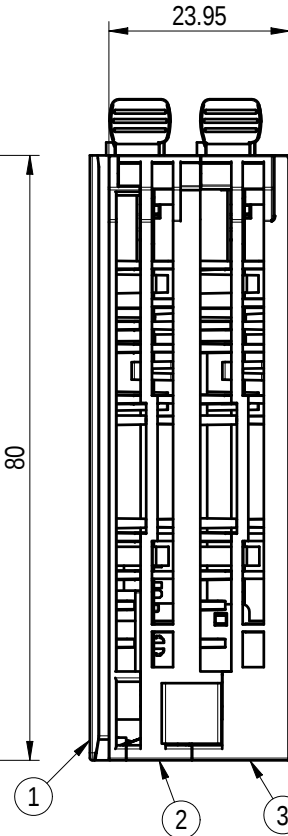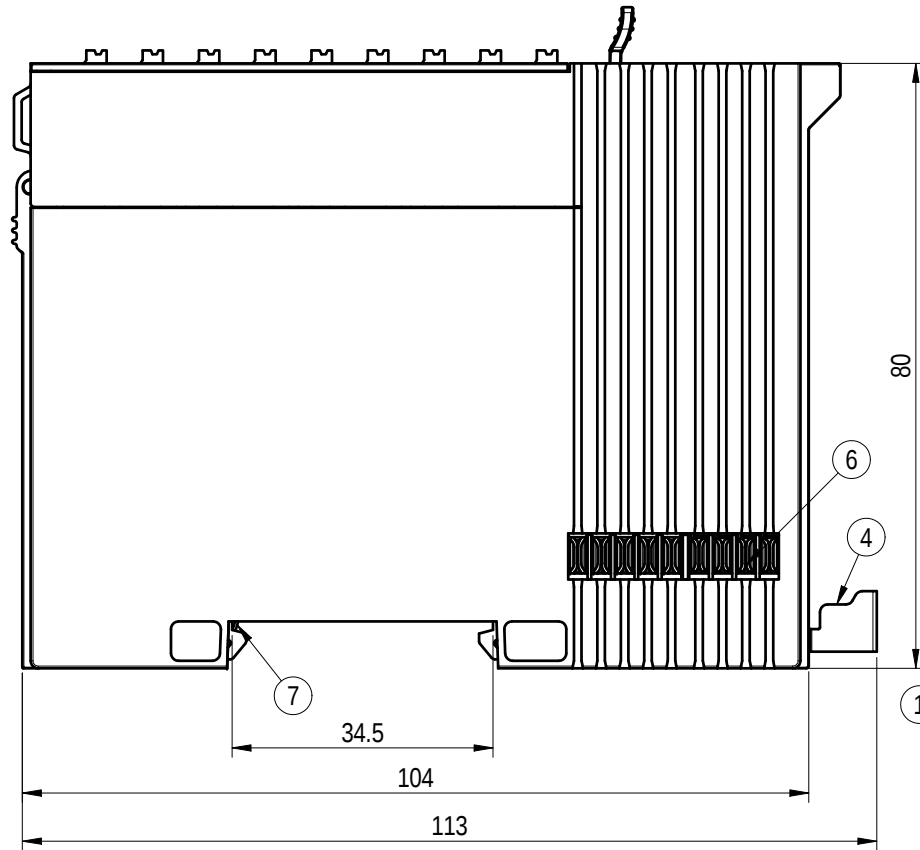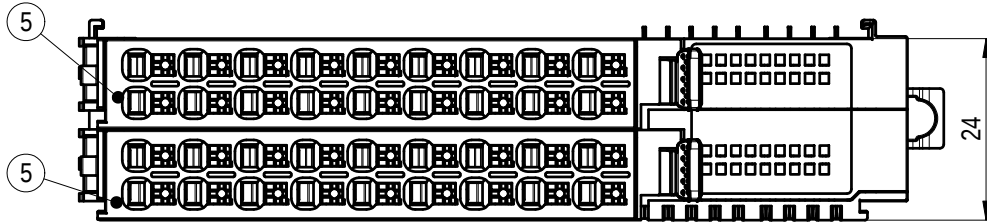

00		NEW DRAWING	蒋其	2025.08.08
REV	ECN	DESCRIPTION	DRFT	DATE