

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized. Violation is prohibited. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，本公司保留所有权利。未经许可，不得复制或传播。

FOR-1755 Rev.2.0


2

3

4


5

6

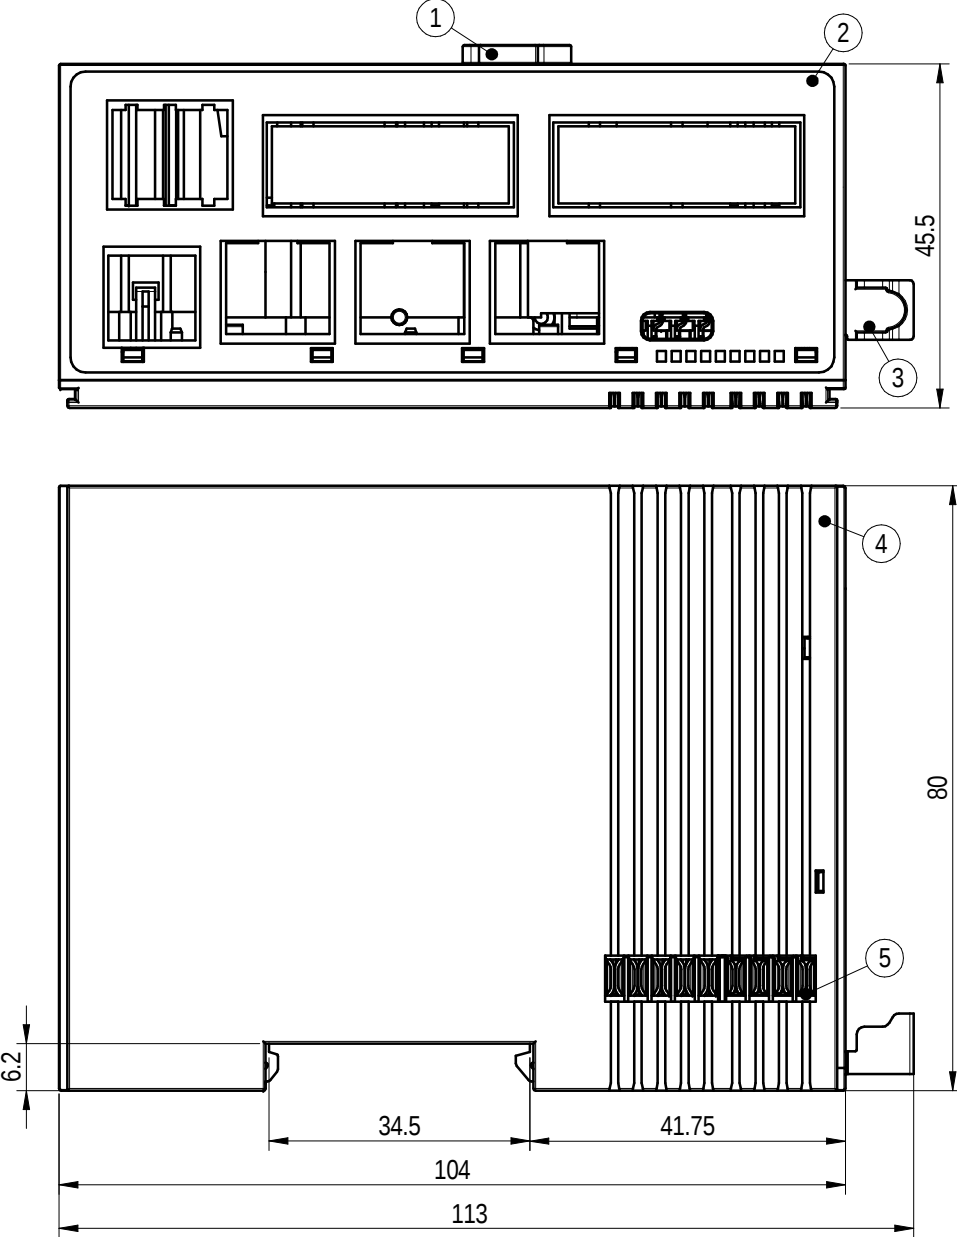

Assembly diagram

43

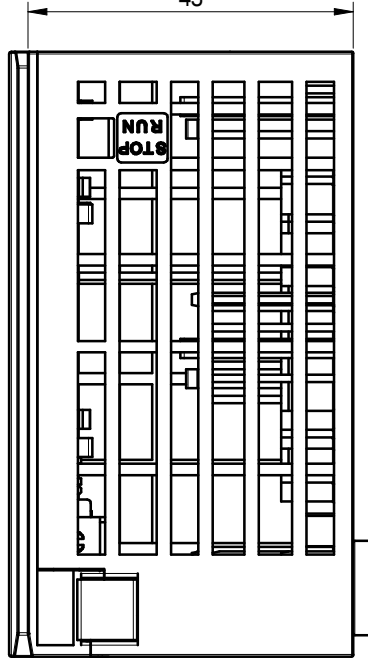

未注公差/General tolerances (mm)													0.1/10
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

5	DF760(300)-G-1-03-00Z(H)	/	/
4	Cover	PC	UL94V-0
3	Card rail foot	PA66	UL94V-0
2	Housing	PC	UL94V-0
1	Handlebar	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DF760(300)-G-1-03-00Z(H)	
电源夹片额定电压电流/Rated Voltage/Current	24V/10A
信号夹片额定电压电流/Rated Voltage/Current	5V/5A
使用温度范围/Operating temperature(°C)	-40~+155
符合RoHS环保要求/Conform to RoHS	Yes
回流焊承受温度/Reflow temperature(°C)	265

过压类别/Overtoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	/
线数范围/Roles	N= 01P		
使用温度范围/Operating temperature(°C)	-40~ + 105		
符合RoHS环保要求/Conform to RoHS	Yes		

		MATERIAL:		SURFACE/COLOR: pantone 427C			
		MAT NO./REV: 30060000912-1 / 00		MAT STATUS: 批量			
APPD: 李根芳	2025.05.22	NAME DF760-C-1-C1-00Z(H)					
CHKD: 马恩开	2025.05.19						
DRFT: 马恩开	2025.05.19	DRAWING NO.		TYPE	DRAWING STATUS	SCALE	SHEET
 1	 A4	200271824		CUSTOMER DRAWING	已发布	2:1	1/1

00	NEW DRAWING	马恩开	2025.05.19
REV	ECN	DESCRIPTION	DATE
马恩开		2025.05.19	

1

2

3

4

5

6