

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非经予明确授权, 否则禁止转让、复制、利用、交流其文件内容。 未经授权擅自复制、转让、利用、交流其文件内容, 本公司保留追究法律责任。 所有权利, 专利, 实用新型和外观设计专利均归本公司所有。

FOR-1755 Rev.2.2



2

3

4

5

6

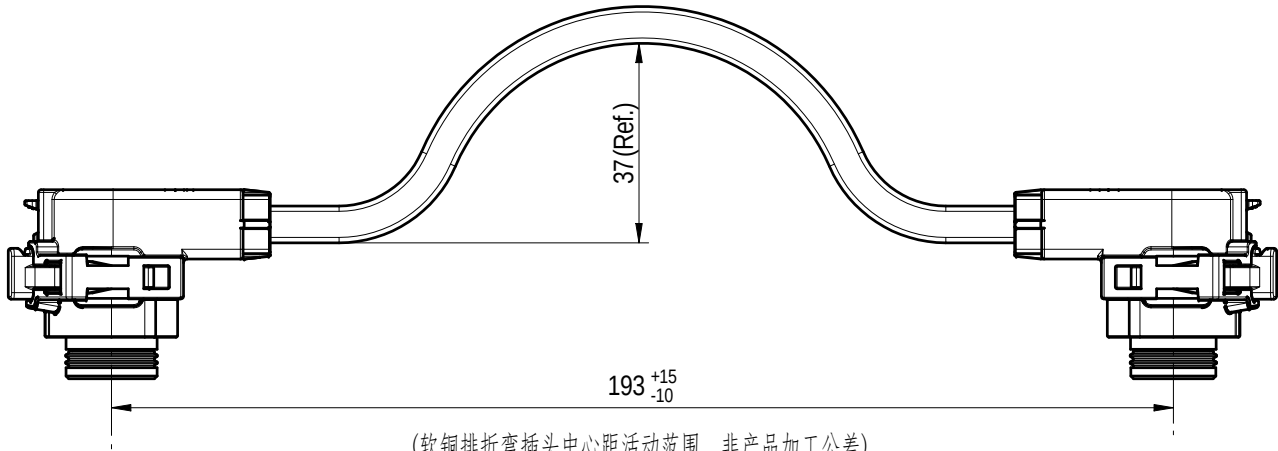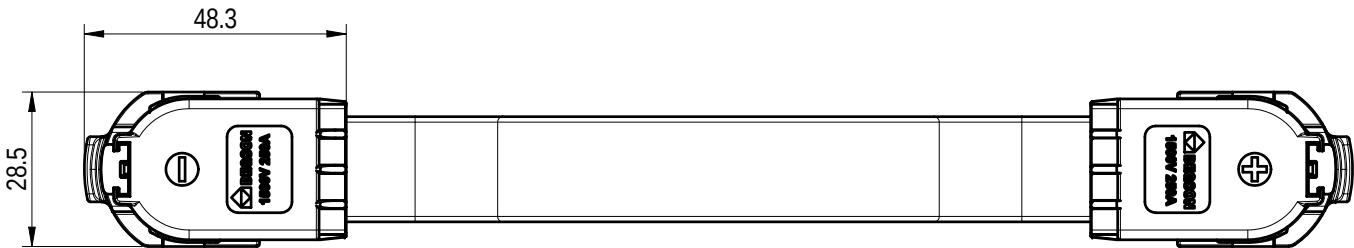

(软铜排折弯插头中心距活动范围, 非产品加工公差)

技术参数/Technical Characteristics	
额定电压/Rated Voltage	1500V DC
额定电流/Rated Current	250A
绝缘电阻/Insulation resistance	≥5000MΩ (干态)
插拔次数/Mechanical working life(mating cycles)	≥100
使用温度范围/Operating temperature(° C)	-40~125(含温升)
耐电压/Withstanding voltage	6800V/min
接触电阻/Contact resistance	≤0.5mΩ
过电压等级/Overvoltage category	III
污染等级/Pollution degree	3
防护等级/Ingress protection	IP67(Mated)
储存温度/Storage temperature(° C)	-40~+85
环保要求/Conform	Rohs
重点管控符号/Key controlled symbol	*
未注公差/General tolerances(mm)	参考ISO 2768-mK

		MATERIAL: 材质		General tolerances(mm): ISO 2768-mK		
		MAT NO./REV: 物料编码 / 版本		MAT STATUS: 物料状态		
APPD: 核准人	核准日期	NAME S-ESPP-08-OR-0193-BK-A00A				
CHKD: 审核人	审核日期					
DRFT: 林仁松	2026-03-10	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
  A4 		图号	图纸类型	图纸状态	1:1.43	1/1

图纸版本	ECN	变更描述	设计人	设计日期
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6