


Overview

Product information

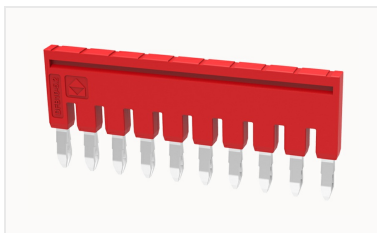

DFB10-5.2-11060000380

Bridge, Spacing: 5.2 mm, Color: red

Product advantages

☑ Plug-in bridge. Flexible circuit connection can be realized;

Product certification

Technical data

Product drawing

3D model

□

Overview

| | |
|---|-----|
| Insulation Materials | PA |
| Flame retardant grade, in line with UL 94 | V0 |
| Number of potentials | 10 |
| color | red |

Dimension

| | |
|---------|-------|
| spacing | 5.2mm |
|---------|-------|

Environmental conditions

| | |
|---|---|
| Ambient temperature (operation) | -40 °C ~ 105 °C (depending on derating curve) |
| Relative humidity (storage/transport) | 25%~75% |
| Ambient temperature (storage / transport) | -25°C~60°C |

Environmental protection

| | |
|------------|---------------------------------|
| RoHS | No excessive harmful substances |
| REACH SVHC | Lead 7439-92-1 |

Accessories

Business data

| | |
|-------------------------------------|-------------|
| Order number | 11060000380 |
| Packing unit | 50 |
| Minimum order quantity | 50 |
| Products weight (without packaging) | 5.75 |