

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交寄本文档的内容。侵犯者将承担赔偿责任。 本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1754 Rev.1.2

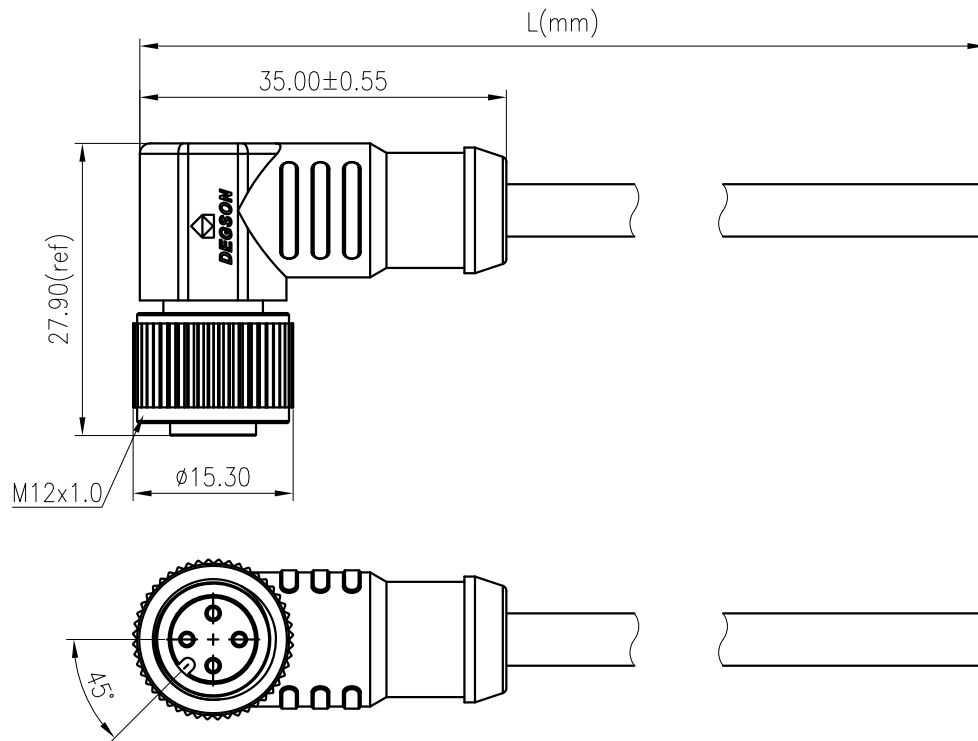
2

3

4

5

6



PP-M12X-XXP-FF-SR8XXX-00A(H)

Coding:A,B,D

Pinnumber:03,04,05,
06,08,10,12

Cable jacket:

C:PVC UL2517 For UL Approve

D:PUR UL20549 For UL Approve

Cable length L:

01:1M

...

99:99M


The line grows business trip:

01~05m: ± 50mm




06~10m: ± 100mm



11~30m: ± 200mm

31~99m: ± 500mm

Dimensional tolerance(mm)					Length tolerance(mm)				 0.10/10 ±2
0	>30	>60	>100	>150	0	5000	10000	>30000	
~30	~60	~100	~150		5000	10000	30000		
±0.25	±0.35	±0.55	±0.80	±1.10	±55	±105	±205	±505	

额定电压/Rated Voltage	3/4Pin	5Pin	6/8/10/12Pin
	250V	60V	30V
额定电流/Rated Current	3/4/5Pin	6/8Pin	10/12Pin
	4A	2A	1.5A
耐电压/Withstanding voltage	3/4Pin	5Pin	6/8/10/12Pin
	AC1500V/1Min	AC1120V/1Min	AC500V/1Min
使用温度范围/Operating temperature(°C)	PVC Cable: -25°C~+85°C PUR Cable: -25°C~+80°C		
防水等级/Levels of protection	IPX8		
接线方式/Terminal	soldering		
线缆标准/Wire specifications	12pin: 12C*26AWG, UL2517/UL20549		
	10pin: 10C*26AWG, UL2517/UL20549		
	8pin : 8C*24AWG, UL2517/UL20549		
	6pin : 6C*24AWG, UL2517/UL20549		
	5pin : 5C*22AWG, UL2517/UL20549		
	4pin : 4C*22AWG, UL2517/UL20549		
	3pin : 3C*22AWG, UL2517/UL20549		
符合RoHS环保要求/Conform to RoHS	Yes		

3pin A Coding		4pin A Coding		5pin A Coding	
					
Pin Assignments Front View		Pin Assignments Front View		Pin Assignments Front View	
				5	Grey
4	Black	4	Black	4	Black
3	Blue	3	Blue	3	Blue
		2	White	2	White
1	Brown	1	Brown	1	Brown
Pin	Wire Color	Pin	Wire Color	Pin	Wire Color
Pin Out		Pin Out		Pin Out	

MATERIAL:				SURFACE:				
MAT NO.:		<div> 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD</div>						
STATUS: /								
APPD:		NAME:						
CHKD:		PP-M12X-XXP-FF-SR8XXX-00A(H)						
DRFT: XU XY 2021.08.30				DRAWING NO.: /			REV	00
	SIZE: A4		TYPE: CUSTOMER DRAWING			SCALE: 1:1	SHEET	1/2

1

2

3

4

5

6

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交寄本文件的内容。侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

6pin A Coding		8pin A Coding		4pin D Coding		5pin B Coding		10pin A Coding		12pin A Coding	
Pin Assignments Front View		Pin Assignments Front View		Pin Assignments Front View		Pin Assignments Front View		Pin Assignments Front View		Pin Assignments Front View	